eppendorf



Catalog

Our environmental awareness



Dear Reader,

At Eppendorf, we are gradually applying the principles of the circular economy. In this circular product life cycle, used raw materials are viewed as valuable resources rather than waste and should retain their value for as long as possible. We all need to use resources more efficiently – from material selection to the end of a product's life. R-rules such as Refuse, Reduce, Reuse, Repair, Refurbish, and Recycle help us achieve this.

In the area of consumables, we are continuously expanding our use of more sustainable raw materials. For example, the use of biobased raw materials reduces our dependence on finite fossil raw material sources and reduces the carbon footprint of our products. The use of up to 100% second-generation biobased materials (Mass Balance Approach*) is also based on the reuse of previously used raw materials. We achieved this for the first time in 2024 by using 100% mechanically recycled plastic in tip boxes.

We are working on further products. These products will help you achieve your sustainability goals.
We are also working on improving the power consumption of our laboratory equipment with each new generation through continuous improvements. However, in doing so, we do not compromise on the safety of your samples or your own safety as a scientist. This requires a constant balancing of needs.

At Eppendorf, we collect comprehensive data on our products, calculate the carbon footprint of an increasing number of products, and have a growing number of products assessed using the ACT® label from My Green Lab®. These measures create greater transparency for you across the entire product life cycle.
Join us on this sustainability journey and calculate online how much CO_2 you will save by switching to biobased products. You too can help shape a more sustainable future.

www.eppendorf.link/consumables-co2-calculator

*www.eppendorf.link/biobased

eppendorf



Follow us on

E-Mail | Videoclip | Webshop | Download | Website | Files | Augmented Reality

Welcome!

At Eppendorf, as one of the world's leading partners in the life sciences industry, we pride ourselves on providing innovative solutions for your laboratory, with a range of products designed to make your daily challenges easier, from pipettes and centrifuges to mixers and ultra-low temperature freezers. We know that every laboratory is unique, which is why we also offer a wide range of high-quality consumables to meet your specific needs.
Our digital laboratory management solutions are designed to optimize your workflow and give you more time for what matters. Be inspired by our customized service and product solutions. We invite you to browse through our range and discover the perfect solution for your needs.

Have fun exploring!













New Highlights

Industries and Solutions
Sustainability
Biopharma
Academia
OEM
Digital Lab Management

Manual Liquid Handling

Automated Pipetting

Temperature Control and Mixing

Tubes and Plates

Centrifuges and Rotors

PCR

Freezers

Cell Incubation

Lab Shakers

Bioprocess

Service Products

EU-IVD Products

Different mains voltage versions

Your local contact

Legal notices, trademarks, patent and design attributions





New Highlights

See page 10 - Manual Liquid Handling chapter

Eppendorf Research® 3 neo

Meet the next generation of mechanical pipettes, designed with you in mind: the Eppendorf Research® 3 neo. Say goodbye to one-size-fits-all liquid handling and choose an ergonomic pipette that adapts to your needs with faster or easier volume adjustment, a shorter operating button, and a secure volume lock. Experience pipetting your way, with ease, precision, and comfort right at your fingertips!



Also now available: the fitting Pipette Carousel and Holder to safely store your new Research 3 neo pipettes well within reach on your lab bench.
See page 28 - Manual Liquid Handling chapter for details.



See page 13 - Manual Liquid Handling chapter



ColorTag pipette marking rings

Do you know the struggle of quickly finding a specific pipette or dispenser in the lab? Make your pipette your own and spot it from a distance with our new ColorTag pipette marking rings! Available in twelve vibrant colors and six sizes, these rings attach easily to any Eppendorf pipette and many other liquid handling instruments, offering clear, color-coded identification.

See page 8 - Sustainability chapter

Eppendorf BioBased portfolio enlarged

Reach your sustainability goals more easily by using laboratory consumables made from up to 100 % renewable resources*. The new Safe-Lock Tubes and Deepwell plates have the same stability and performance as you are used to. Reduce your carbon footprint and have a peace-of-mind-switch to a more environmental friendly alternative without adapting your protocols.

*Amount of biobased material is calculated via mass-balance-approach (for more information visit www.eppendorf.link/BioBased).



For Products see Tubes and Plates chapter

See page 19 - Freezers chapter



Freezer Cardboard Boxes

Looking for basic freezer boxes for storage?
The water-resistant cardboard boxes are optimal for organizing and safely storing your samples at 4 °C, –20 °C, or –86 °C. For full vessel type flexibility, the boxes are available in three heights and with a wide selection of box dividers.

SafeCode Tubes

The well-known SafeCode concept is now also available for our famous Safe-Lock tubes. The prelabeled datamatrix code and one human readable code enables clear and safe identification of the vessel. The SafeCode function provides ID-specific documentation as Certificate of Quality, technical drawings, lot-number, product description, and order number. Benefit from reliable sample management with SafeCode consumables. Discover our PCR plates, DWP, MTP as well as conical tubes with SafeCode and improve your data management.



See page 24 - Freezers chapter

See page 10 - Cell Incubation chapter



CellXpert® CS220

Are you expanding mammalian cells like CHO or HEK293 in shake flask cultures? Discover our new large CO_2 incubator shaker including many cost- and time-saving features that will help your team remain focused on the tasks critical to your success. Accelerate your growth!

Sustainability



Our commitment to people and the environment

To achieve sustainable success, we consider not only financial but also environmental and social aspects in our business activities and strive to harmonize these three dimensions. Sustainability has always been an integral part of our company:
Our products are becoming ever more sustainable and help ensure that research can be carried out optimally all over the world. We are continuously working on protecting the environment and are aware of our significant responsibility as an employer towards our employees.
Our commitment to society manifests itself in many ways and is closely linked to our core competencies. Compliance with laws and regulations is more than a matter of course for us.

Sustainability Vision

A Systematic Approach to Sustainability
Our mission "to improve human living conditions" requires us to positively transform the Eppendorf Group to operate safely within the planetary boundaries and respecting humanity: We want to reduce CO_2 emissions in our own operations to zero by 2028, minimize the use of natural resources, and improve human well-being throughout our value chain. This vision is part of our strategic approach to take responsibility and contribute to a sustainable development.

Stakeholder-, Impact- and Success-oriented
For years now, Eppendorf has taken its corporate responsibility very seriously. In order to systematically integrate environmental and social aspects even more strongly into the Group's activities, Eppendorf has set itself a clear strategic framework.
The basis of the strategic framework is a combination of integrating different perspectives on 20 responsibility topics relevant for Eppendorf: The dialog with various stakeholders, a data-based determination of our environmental and social footprint using an impact analysis and a success-oriented assessment.

Sustainability along the entire value chain
For Eppendorf, corporate responsibility does not begin with its own incoming goods, nor does it end at the point of sale. Instead, the focus is on the entire value chain. Thus, the strategic framework includes many topics in the areas of climate change, natural resources, social compliance, human well-being, digitalization, and society - and this from the raw material supplier to the customer.

Our Management Team is commited to ensure successful implementation, each member of the Board of Management has assumed responsibility for a guiding theme.

Mid of 2023, we published our second sustainability report compliant to GRI standards.
Please find more details:

www.eppendorf.link/sustainability-report



Get all information about Sustainability at Eppendorf!
www.eppendorf.link/sustainability



Sustainability in the Lab Concerns Us All
Sustainability is becoming more and more important in public life. Wherever we interact in our personal area, there is a growing number of sustainability topics. The same holds true for our interaction with you, our customers in the labs worldwide. Whereas just a few years ago the topic of sustainability was mainly driven by dedicated employees in academic institutes and research-based companies, there has been a noticeable change for some time now. Purchasing departments as well as procurements systems request information. We see a growing interest in Eppendorf and our approach to sustainability.

Retrospect
In 2010, our centrifuge team started a green sustainability project. We found that a new centrifuge provided a far higher energy saving than expected. We were proud of the results. But the concept came too early: Energy efficiency in the laboratory was not yet the focus at that time.
Meanwhile, more and more customers expect sustainability facts about our products.

How Far can We Go? Safety First
The use of new, innovative technologies can optimize both resource consumption during production and power consumption during use. Even small improvements optimize the longevity of devices and thus contribute to greater sustainability.
Despite all needs for improved sustainability, there is a special situation in the laboratory:

The safety of the employees, combined with safety for the samples, is the focus, embraced by sustainable progress.
The safety of valuable samples is always our top priority. For example, the set temperature for centrifuging sensitive RNA samples must be maintained accurately throughout the process to ensure data reliability and reproducibility.

epGreen

Beyond Green
The green idea may be the most familiar one, but in fact sustainability encompasses many environmental, social, and economic factors. At Eppendorf, we consider the entire supply chain and define our impact on sustainability in areas such as climate change and the use of natural resources, social compliance and human well-being, as well as with regard to data security and our role as responsible citizens in society.

This consideration begins before the product; it encompasses Eppendorf as an employer as well as a customer vis-à-vis our suppliers. Thus, our own Code of Conduct sets the bar. Our social behavior includes treating each other with respect, paying heed to the intellectual property of others, sticking to facts, and making ourselves reliable partners for our counterparts. These expectations are clearly defined and subject to continuous improvement and learning.

Sustainability



Ergonomics - It's About You!
Workflows in today's laboratories are becoming ever more condensed, and the strain of laboratory work is constantly increasing – making the ergonomics of laboratory devices and the entire work environment more and more important.
Personal health status or corporate sickness levels of employees due to back bone trouble or handwrist load – everyone tries to reduce the stress.
Ergonomics goes far beyond the "ergonomically designed chair". At the beginning of the 1970s, Eppendorf began optimizing the ergonomics of its laboratory equipment. In 2003, we launched the PhysioCare Concept® , which was focused on liquid handling devices such as our pipettes. Today, the PhysioCare Concept® implemented in all Eppendorf products supports the well-being of our users.

PhysioCare concept



Biological Sourcing for Laboratory Consumables?
Do materials manufactured with renewable feedstocks offer the same quality, purity, sterility, and process reliability criteria as the high quality products you have been using? At Eppendorf, we have found just such a source material and are using it for new product lines. These biobased products offer the same material performance as our virgin fossil-sourced material. More detailed information is available on page 8.
Find all variants of Eppendorf Tubes® BioBased and twin.tec® PCR plates BioBased in the "Tubes and Plates" section and epT.I.P.S.® BioBased in the "TIPS" section.

Sourcing from Recycled Material?
Closing the material loop is our goal, but we still have some homework to do. Recycled plastic is a complex composition for laboratory consumables of highest purity grades. As a first step, we produce our disposable Racks for our epT.I.P.S.® pipette tips from 100% single source intra-type collected Polypropylene recyclate.





Remember 2008? Hydrocarbons - Natural Cooling of the Future
As one of the very first advocates of hydrocarbon gases at -86 °C, Eppendorf now has more than 15 years of experience with hydrocarbons like R290/ R170 in R&D, production, logistics, and service in the field. In 2008, the Premium U570h ULT freezer was one of the very first commercially available ULT freezers driven by natural cooling liquids.
Replacement of the HFC based cooling liquids for refrigerated instruments is needed as global warming needs to be slowed down. The preferred refrigerants are also known as green or natural gases like R290 and R170.
Due to this goal, we at Eppendorf clearly plan to replace all classic cooling in our portfolio within the next years. This is not limited to freezers but also includes the refrigerated centrifuges and refrigerated shakers.
The Centrifuge 5427 R with hydrocarbon cooling is our first step on this journey. Many more will follow. Discover more in the "Centrifuges and Rotors" section.

Trust in Others: Independent Validation
As Eppendorf, we respect external test procedures and external independent test results of our products. Besides external test house checks for e.g. the ULT freezers, we ask for independent validation by third party organizations like ENERGY STAR®, My Green Lab®, or ISCC PLUS (International Sustainability & Carbon Certification).
Eppendorf collaborates with My Green Lab®, an international NGO that validates and certifies lab products with "ACT - The Environmental Impact Factor Label" since 2017.
We are proud of a growing number of ACT validated and certified Eppendorf products, e.g. different tips, tubes, ULT freezers, pipettes, centrifuges and more to come.
ISCC PLUS (International Sustainability & Carbon Certification) is a globally leading certification system, which offers solutions to address sustainability requirements for all feedstocks and markets. Thus traceability throughout the supply chain enables each player to source sustainable products from any certificate holder. The material of the biobased consumables is certified by ISCC.



Sustainability



100% Renewable Energy for Assembly
Stepwise, our production facilities have been changed to power supply from renewable sources. Since 2021, we can proudly announce that nearly all products within the Eppendorf factories are assembled by 100% renewable power. But the product assembly is just one part of the energy story – the usage of lab instruments also requires energy. Did you already check the power origin in your lab?

Our Goal for 2028
We strive to cut our greenhouse gas emissions in our own operations down to zero until 2028. These reductions will include CO2 emissions based on Scope 1, 2, 3.6, and 3.9. By changing the sources of external power supplies, we were able to already cut down our total emissions by 58% (2023 compared to 2019).

In addition to our own internal target, we have signed up to the Science Based Target initiative (SBTi) in 2023. As SBTi also includes Scope 3 emissions, it covers a broader range of emissions. In the medium term, our internal target will merge with the SBTi targets.

What Comes After the End?
Despite good ideas, lab waste still cannot be recycled efficiently, e.g., due to regulatory requirements for biological, chemical, or radioactive hazards.


Disposal of Packaging
The packaging of the products contains different materials. This includes mainly cardboard, plastic covers or bags, and some foam parts. Recycling of materials becomes more and more important. Our packaging cardboard material already consists of a high ratio of recycling material of 70 to almost 100%. Please support the global sustainability initiative of recycling valuable raw material by also collecting the packaging material and disposing of it in the appropriate collection containers at your organization. We suggest you to contact your local waste hauler or facility management team to understand the available recycling options for your organization.



Disposal of Instruments
Our instruments last for many years, but if they need to be replaced, we kindly ask you to fulfill local requirements for disposal of these instruments. We strongly recommend a certified local recycling partner with experience in instruments from the lab. Keeping it "local" reduces the impact of transportation, and the „certified" aspect is recommended due to the safe and sustainable removal of all parts.



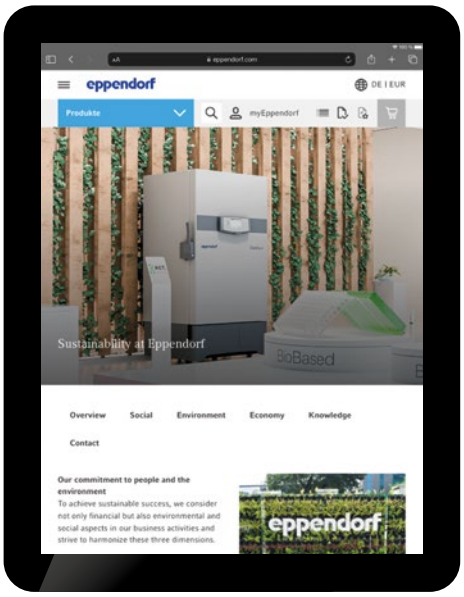Image source:
Paket/shutterstock.com



Sustainability: Our On-Going Journey
Science is based on facts. Statements such as "Our product is more sustainable compared to others" are questioned by researchers in many ways. Analyzing and improving sustainability issues requires knowledge and intensive work. None of the sustainability challenges can be solved quickly or easily. But they all require manufacturers and customers to listen to each other and work together.
This work is never over, but an on-going journey in which we communicate in constant dialogue with our stakeholders. We are researching new technologies, alternative materials and concepts. Each of these changes has the potential to contribute to progress in sustainability.

Get all information about Sustainability at Eppendorf!
www.eppendorf.link/sustainability

Eppendorf Consumables BioBased

2nd Generation Feedstock, 1st Class Consumables
Cut-down your carbon footprint! No compromise on quality! The Eppendorf Consumables BioBased meet the high demands of diverse laboratory applications and convince by their sustainability which is achieved by producing these pipette tips, tubes, and PCR plates from renewable feedstock of the second generation. General Quality Certificates on compliance with standards and general Eppendorf quality requirements, product-specific and lot-specific purity certificates as well as ACT certificates attest the well-known premium product quality customers can expect from Eppendorf Consumables. The sustainability factor of Eppendorf Tubes® BioBased, epT.I.P.S.® BioBased pipette tips, Eppendorf twin.tec® Trace BioBased PCR Plates and brand new Eppendorf Safe-lock tubes® BioBased will clearly be visible with continuous use in your laboratory carbon footprint. These products are available in various variants (e.g. ep Dualfilter T.I.P.S. BioBased) volumes (e.g. tubes from 0.5 mL to 50 mL) and purities (e.g. PCR clean or Biopur®) with screw caps in volumes from 5.0 mL to 50 mL.



Product features
- Support you in achieving your sustainability goals in the lab by reducing your lab carbon footprint! Produced from recycled feedstock from 2nd generation material, derived from waste and residue stream, e. g. from cooking oil production, used oil production, and used oil
- Traceability along the entire supply chain enabled through ISCC PLUS (International Sustainabilita & Carbon Certification);
  - ACT (Acccountability, Consistenc, and Transparency) Certification – the independent validation provided by My Green Lab®;
  - Lot specific purity certificates from an independent laboratory can be downloaded from Eppendorf Website;
  - General certificates on compliance with standards and general Eppendorf quality requirements.
- Ensured high sample integrity by using premium USP class 6 raw material and no use of slip agents, plasticizers, and biocides during manufacturing

Eppendorf Tubes® BioBased, epT.I.P.S.® BioBased, Eppendorf twin.tec® Trace PCR Plates BioBased, and Eppendorf Safe-Lock Tubes® BioBased are made from various types of polymers such as polypropylene, polyethylene, or polycarbonate. Depending on the type of polymer, the applicable biobased proportion of renewable raw material must be specified in accordance with the mass balance principle. This results in a corresponding average value for product consisting of several polymer types.

Download Brochure
"2nd Generation Feedstock, 1st Class Consumables"
www.eppendorf.link/BioBased-Brochure

About Biobased Polymer

New

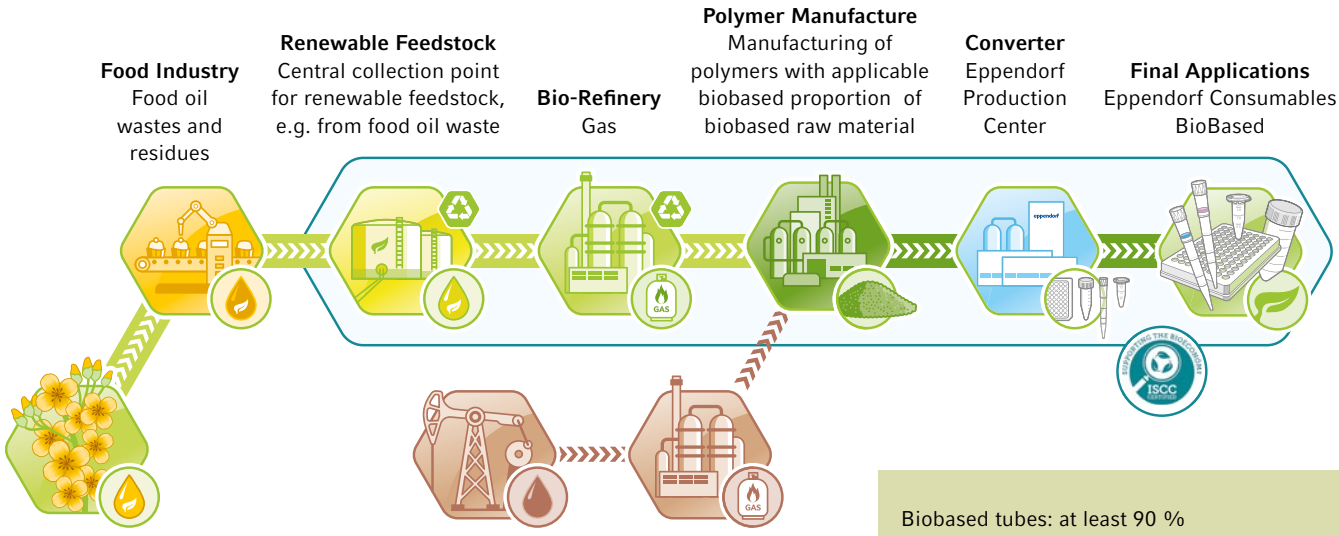




To increase the sustainable properties of plastic used for the production of lab consumables, we must make and use plastics more sustainably using recycled and renewable feedstocks.

> In this specific biobased polymer production, fossil raw material is saved by replacing it with sustainable raw material produced from biobased waste and residues (2nd generation renewable feedstock)

> The raw materials used to produce the renewable feedstock can be backtraced to the first collection points and the origin of the renewable raw materials from carefully selected suppliers committed to sustainability is assured
> The final polymers are sustainability certified by "ISCC PLUS" - the reliable global leading certification scheme for manufacturers producing biobased polymers and their further processing




Biobased tubes: at least 90 %
Biobased tips: 100 %
Biobased PCR plates: at least 86 %
(combined; 100 % + 77 %)
Biobased Safe-Lock Tubes: 100 %

Biopharma

CAR-T Cells: Breakthroughs in Cancer and Autoimmune Therapies


One of the most revolutionary cell therapies to transition from bench to bedside in the past decade is undoubtedly the development of chimeric antigen receptor (CAR)-T cells. Here, CAR-T cells have found a plethora of different applications. Firstly, by proving to be an effective treatment for certain blood cancers that were previously deemed incurable. Secondly, in holding promise for treating certain auto-immune diseases and solid tumours.

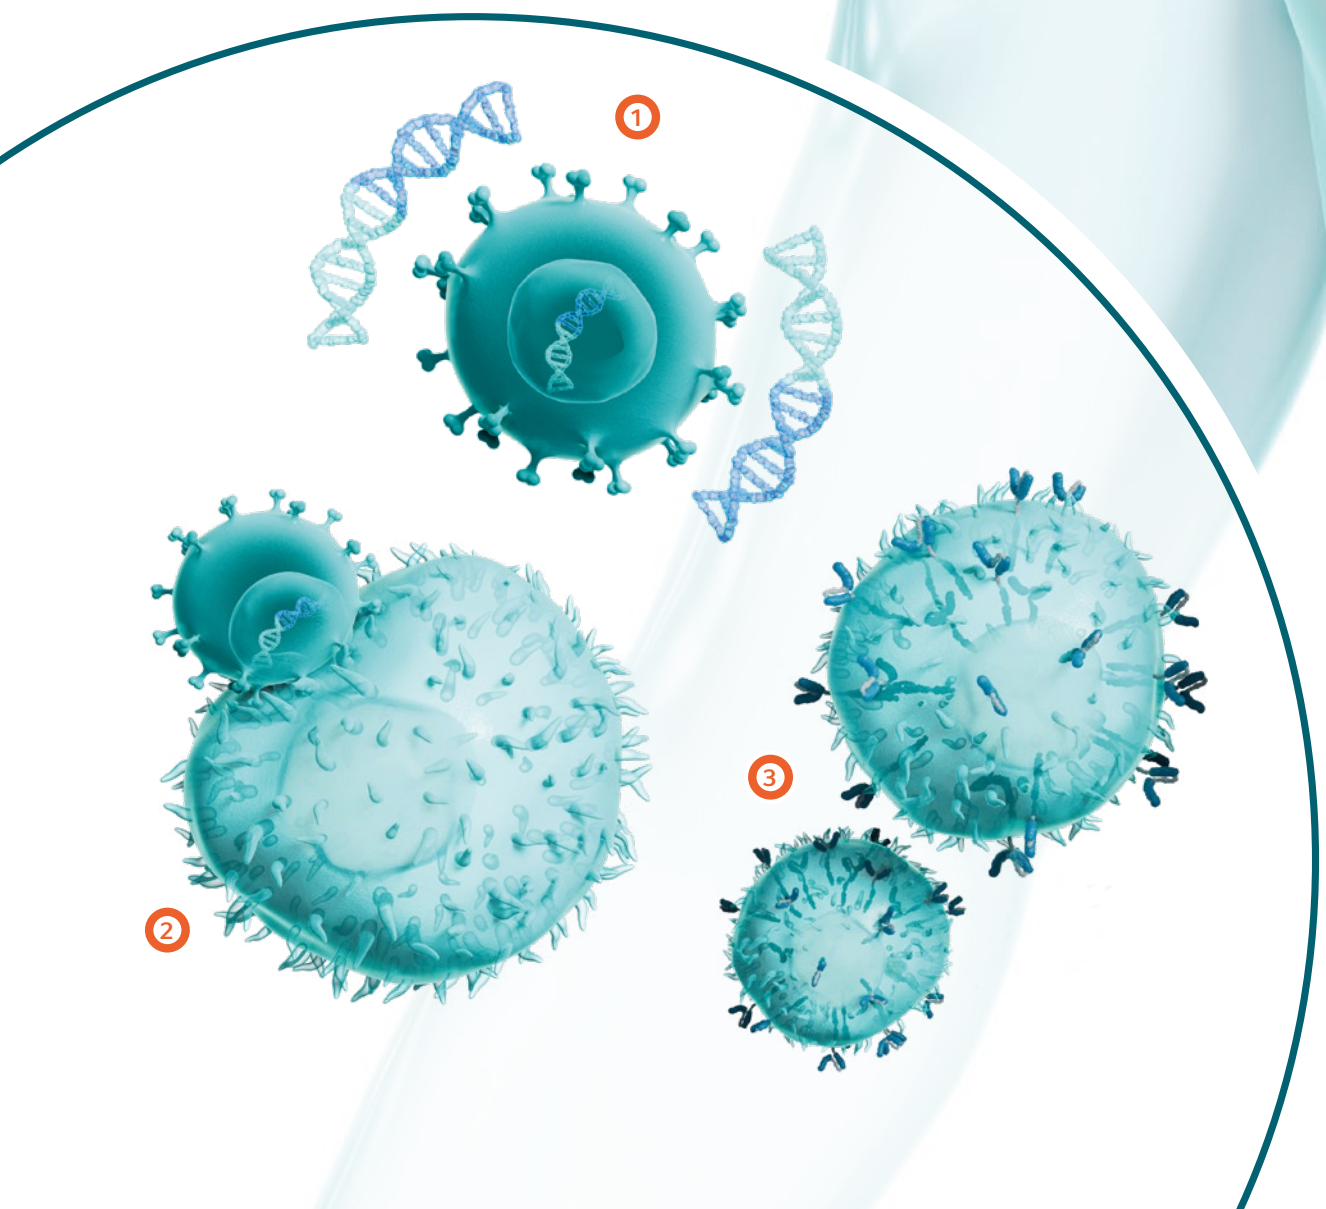As ongoing research broadens the applications of CAR-T cells, the potential for transformative outcomes continues to grow. The promise of improved efficacy, reduced side effects, and enhanced patient outcomes propels CAR-T cell therapy to the forefront of the evolving cancer treatment landscape, offering hope for a future where even the most challenging malignancies can be effectively targeted and overcome.



CAR-T Cell Development – The Future of Fighting Cancer

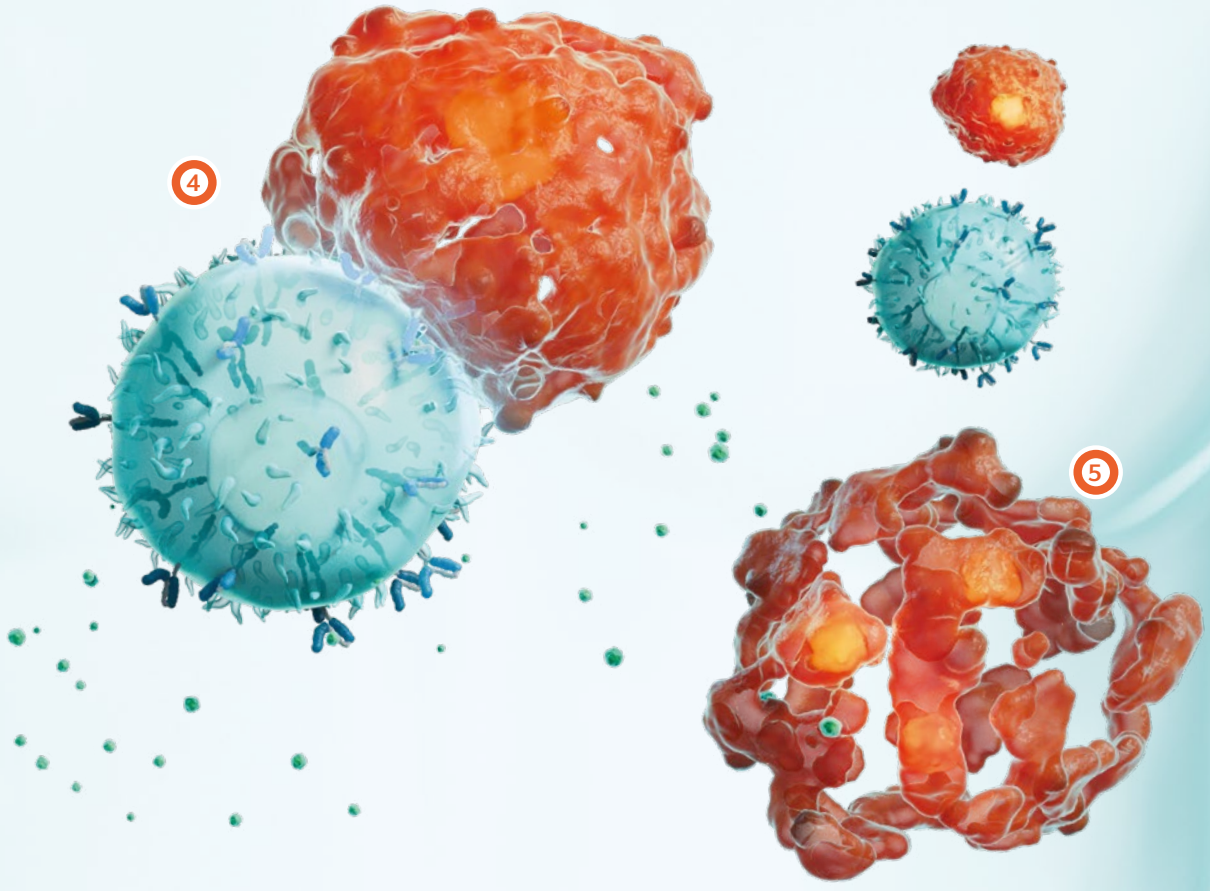CAR-T cells, genetically engineered and equipped with specific receptors to target and combat cancer cells, are primarily divided into two categories: autologous and allogenic CAR-T cells. Hereby, autologous CAR-T cells derive from the patient's own white blood cells and are reintroduced after modification, whereas allogenic CAR-T cells are designed as off-the-shelf solutions for use in different patients. However, both approaches have their challenges. The manufacturing process for autologous CAR-T cells is complex and costly, as each patient's cells must be individually processed. Allogeneic CAR-T cells, on the other hand, currently do not have the same safety profile, necessitating further research to address these issues.



1. Designing of CAR encoding vector
2. CAR transduction into isolated T cells
3. Injection of CAR-T cells into patient
4. Binding of CAR-T cell to cancer cellv
5. Destruction of cancer cell

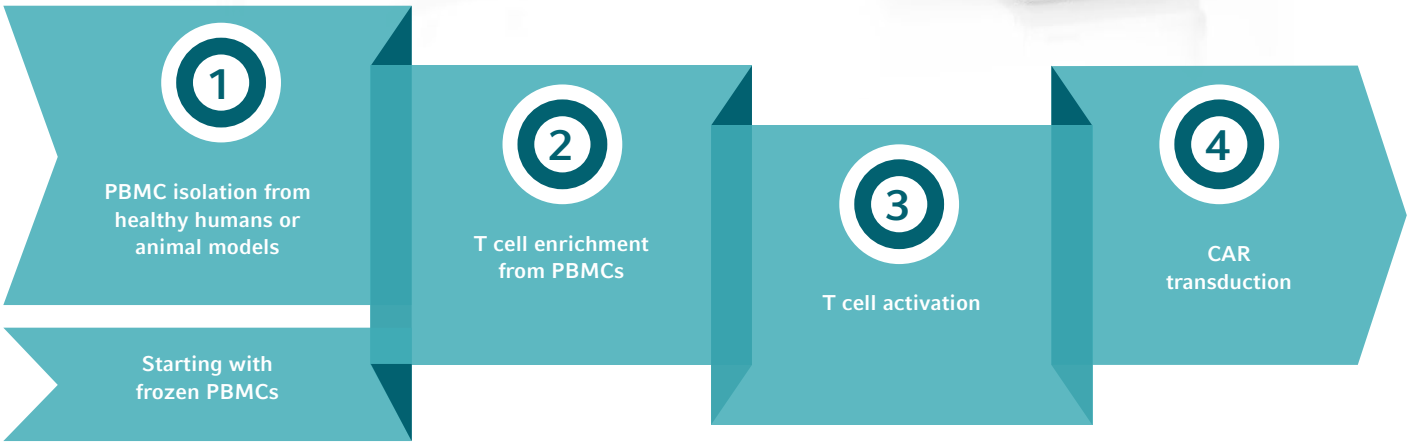
Advancing CAR-T Cell Research

Reproducible PBMC isolation
The Centrifuge 5910 Ri has soft acceleration/break ramps for optimized PBMC isolation and significant time savings during Ficoll gradient separation. High throughput with up to 4 × 1,000 mL working volume ideal for cell harvesting on the benchtop.

Safe and consistent culturing of cells
Ensure optimal activation of T-Cells with the uniform atmosphere of the CellXpert® C170i. Fanless design, seamless chamber, 180 °C sterilization cycle, and a removable water tray for reliable contamination control.











Contamination proof thawing
The Eppendorf ThermoMixer® C and the SmartBlock cryo-thaw exchangeable block offers a special thawing program that supports reproducible, reliable thawing of frozen PBMCs up to 1 mL in standard 1.8-2 mL cryovials.

Safer pipetting
The ep Dualfilter T.I.P.S.® pipette tips are proven to provide the optimized protection of your pipette and sample against unintentional and unnoticed contamination during viral work.

For research use only. If you have any questions, please contact the Eppendorf Application Team.

Get all information about Pharma at Eppendorf!
www.eppendorf.link/pharma

Best conditions for your mammalian suspension cell culture!
The CellXpert CS220 ensures precise temperature and CO_2 control, minimized evaporation by active humidity control and reliable shaking. The stainless steel chamber and integrated 180 °C sterilization protect your cells from contaminations.

Reliable and traceable sample storage
Freeze down your CAR-T cells and digitally store data (donor, date, CAR contstruct etc.) with the Safe Code system to readily access sample information even after transfer to LN2 (compatible with any barcode scanner).













Optimized cell expansion
The DASbox® Mini Parallel Bioreactor system provides precise control over culture conditions in a small volume range (100 mL-250 mL), optimizing CAR-T cell growth and viability during the crucial expansion phase.

Speed up your characterization assays
The Eppendorf Xplorer® electronic pipettes enables quick filling of plates using the dispensing mode.

Simplify your scale-up
With the BioFlo® 320, scaling production is simpler than ever. Benefit from our intuitive Scale-Up Assist software, ensuring easy transition from bench to production while maintaining optimized conditions growth conditions and process efficiency.

Best-fit solutions for CAR-T cell research and development
www.eppendorf.link/car-t

Viral Vector Development – from cloning to transduction

Countless PCRs in as little as 15 mins
The Mastercycler® X50 with the 384-well or 96-well silver block can process hundreds of PCRs in as little as 40 min and with a fast polymerase kit even in less than 15 min. Connect up to 50 devices for increased throughput.

Get high plasmid yields
The Innova® S44i can fit up to twice as many flasks as other shakers in the market and is ready to reliably support current high-yield plasmid production protocols at high speeds, 24/7.





1

CAR design

2

Cloning and amplification of plasmid system for lentiviral vector production

3

Lentivirus vector production





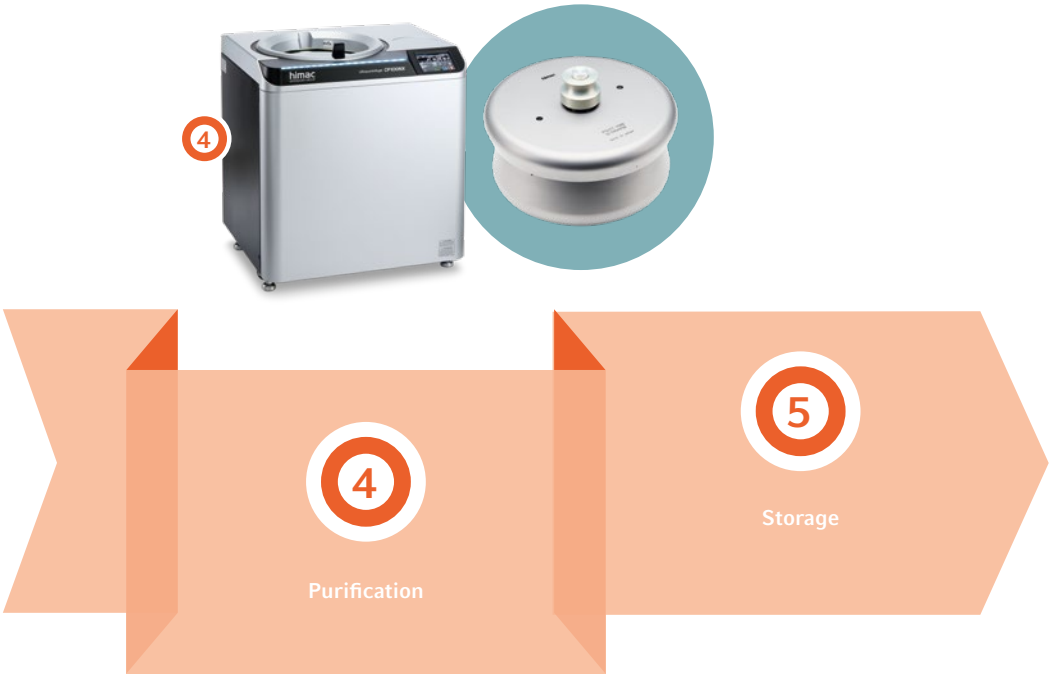
Bring your process to the next level
BioBLU® Single-Use Bioreactors provide 400x-fold scalability for a working volume range from 100 mL to 40 L. Working in closed systems reduces cross-/contamination risks and reduces turn-around times.

Best conditions for your mammalian suspension cells!
The CellXpert CS220 CO_2 incubator shaker ensures precise temperature and CO_2 control, minimized evaporation by active humidity control and reliable shaking. The seamless chamber design and the integrated 180 °C sterilization function protect your cells from contaminations.

For research use only. If you have any questions, please contact the Eppendorf Application Team.

Get all information about Pharma at Eppendorf!
www.eppendorf.link/pharma

Increase downstream quality and purity
The Ultracentrifuge CP100NX can spin your viral vector with a maximum speed of up to 803,000 × g. Rotor life management system for increased safety! The broad rotor and adapter portfolio enables flexible vessel selection and scalability.







You need higher virus titers?
The BioFlo® 320 Bioprocess Controller revolutionizes virus production by enabling higher titers with intelligent control. Achieve consistent, scalable results from R&D to full-scale through our precise, user-friendly bioreactor controller, designed for virus yield.

Storing your vectors at -80 °C?
Get ID-specific consumable information for comprehensive documentation during your R&D phase with the Safe Code system. The ACT® certified CryoCube freezers ensure energy efficiency and sample safety.

Best-fit solutions for CAR-T cell research and development
www.eppendorf.link/car-t

Academia

Curtain up for the Academic Research: “Your Work Matters”



On our new website “Your Work Matters” we not only offer scientists from academic research the opportunity to present themselves and their projects. Our experts also give tips on topics such as increasing efficiency or saving time and impart technological background knowledge.

Anyone working in academic research suffers from a similar condition: college or lengthy training is followed by long hours, weekend work and low pay, coupled with a great deal of frustration and often low appreciation of the work. Presenting one’s own work and the research results of the working group is subject to lengthy review processes in a constant fight for good journals. Applications to speak at conferences and to present your own poster are limited to the purely scientific results - but where is the person behind it and what drives him?

Making Laboratory Life More Efficient and Easier

Raising research funds to increase resources or enable conference participation requires writing many proposals. But where do you get the time? Our experts support you in using the existing equipment more efficiently, in optimizing experiments or in selecting the right device for the widest possible range of applications. Our videos, webinars and technical articles are designed to make your laboratory life easier and show you the way to more time savings, more efficiency and less frustration due to failures in experiments. Poster downloads or tips and tricks will help you to always keep the important points in mind. And of course, we also give suitable product recommendations for each topic, which should make your everyday work in the laboratory easier.



Check out the whole project
www.eppendorf.link/yourworkmatters

Get some tipps
www.eppendorf.link/support-matters

Your Project Matters

A platform on which one can present oneself and one's own research freely, openly and personally was missing until now. With "Your Project Matters" we are now giving academic science a face and a voice and showing academic research in all its diversity in the form of video and text interviews. We have already interviewed numerous scientists and would like to hear more exciting projects.

We would like to know from you what made you go into science and stay on the ball with your topic. How do you motivate yourself, your employees and colleagues to keep going in the hope of improving the living conditions of people and animals, discovering new things and preparing the world for the future? What do you like about laboratory work and what can you live without? And above all: what is your project?

Check out the stories of the scientists. Or would you like to tell your story too? Then apply now!



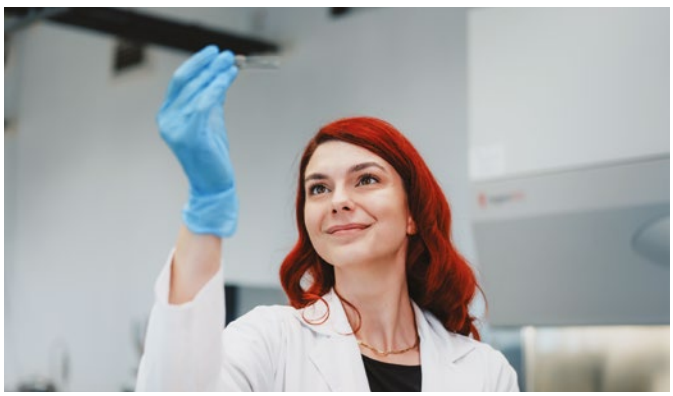
Marina Panova, Scientist, Gothenburg, Sweden:

"There is a great potential in environmental DNA to replace our traditional [invasive biodiversity] monitoring methods [of marine organisms]."



Sara Häkli, PhD student, Kuopio, Finland:

Saras' study aims to understand epileptic events during non-REM sleep phases and their correlation to memory loss in Alzheimer patients.



Carmen Nicolae, Medical engineer, Bucharest, Romania:

"I […] contribute to developing innovative treatment options [and] try to help people that suffer from bone defects."



Rinalda Proko, PhD student, Fayetteville, Arkansas, USA:

"My goal is to identify some proteins that interact with […] septins [causing] pathogenesis in fungi, such as Magnaporthe oryzae […] which is responsible for causing rice blast disease."

Watch the interviews
www.eppendorf.link/yourproject

OEM

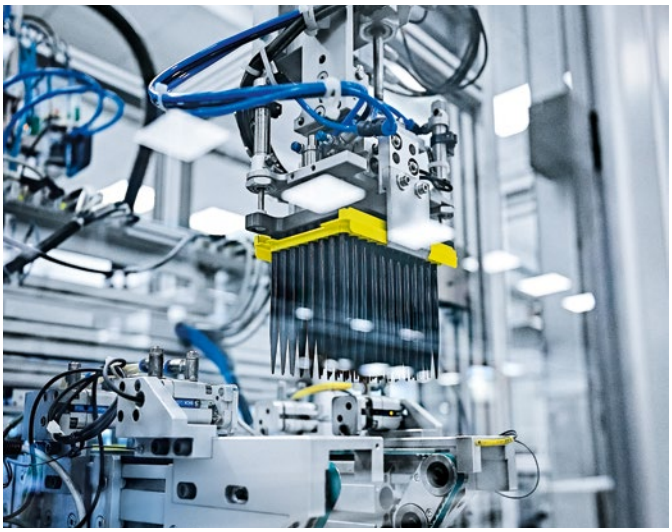
Trust Our Expertise



With Eppendorf OEM as your partner, you can take advantage of decades of competence and experience in developing and manufacturing high-tech laboratory products with premium quality.
Find an OEM product or component that perfectly fits to your requirements and applicational needs and start partnering with us today.

Searching for a manufacturer capable of producing your OEM solution in a high volume?

> Production scalability at high volumes can be achieved through our propriatery precision molding technologies
> Automated quality checks measure coaxiality and residual volume of tips as well as 100% in-line filter inspection
> Manufacturing sites in Germany and the US secure delivery on-time, worldwide
> Fully automated manufacturing facilities ensure a low level of contamination
> In-house development and manufacturing of injection tools results in high quality production with extremely low failure rates



Planning your OEM project?

oem@eppendorf.com

Contact our OEM experts
Do you want to know more about how we can support you with OEM solutions?

Get all information about the Eppendorf OEM portfolio!
www.eppendorf.link/oem-portfolio

Your Benefits when Partnering with Eppendorf OEM

Fast time to market

High scalability

Variety of in-house capabilities

With you every step

We know it can be a struggle to integrate custom design diagnostic components. But it doesn't have to be that way. If you are looking for precision engineering, understanding and expertise – you've come to the right place.
With Eppendorf OEM, you'll benefit from our decades of experience in the manufacture of premium-quality components as well as our deep scientific domain understanding.





Quality down to the tips

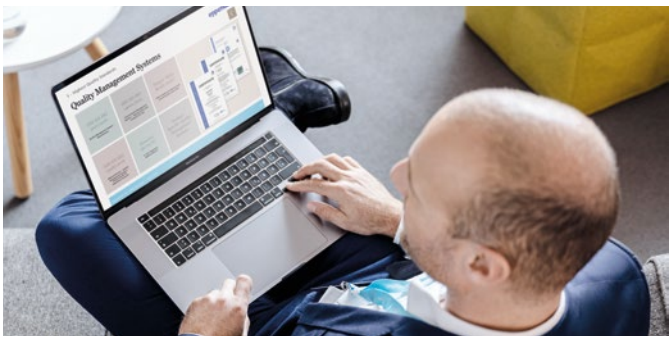
Using only the purest raw materials and performing quality and functional checks throughout the entire production process, Eppendorf OEM products always come with premium quality.

Since our production is fully automated, contamination is reduced as far as possible.

ISO-certified for your confidence

Eppendorf is certified according to worldwide recognized and accepted ISO 9001, 13485 and 14001 standards.

This gives you the confidence that all processes in product design, manufacturing and marketing are defined and monitored in order to ensure consistent products and services.




Your OEM Solution

Eppendorf is recognized as a global leader for its high quality standards, innovative technologies and cutting-edge developments. Take advantage of our competence and decades of experience in developing OEM partnerships and manufacturing high-tech laboratory products. All our products are manufactured to premium quality standards as we have our own production facilities.

Eppendorf OEM is covering the full lifecycle as an expert partner from concept and design to production, logistics and beyond. Our services include:

Requirements & specification
> Analysis of requirements and specification definition
> Central project management & complete documentation
> Agile development

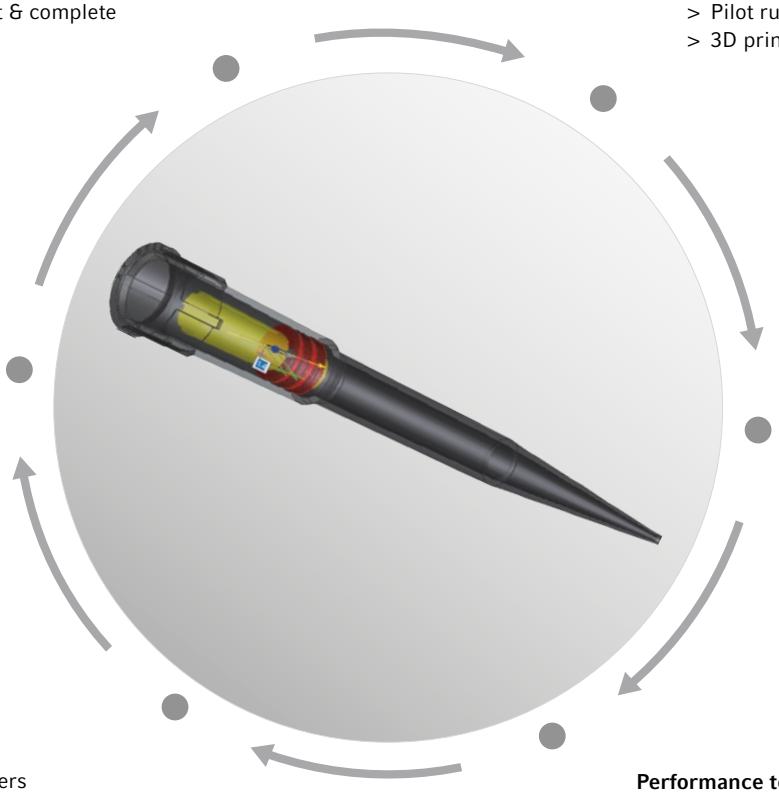Design & prototyping
> Material development
> Polymer chemistry
> Electronics design
> Pilot runs for manufacturing
> 3D printing & in-house tool making



Product management
> Product lifecycle management
> On-market support – manufacturing, regulatory and change management
> End of life product support

Packaging
> Packaging design
> Transport studies
> Sterile packaging

Infrastructure
> Worldwide distribution centers
> Manufacturing on multiple continents
> Global regulatory & quality management systems

Performance test
> Development of test systems
> Documentation
> Quality assurance

Get all information about the Eppendorf OEM portfolio!
www.eppendorf.link/oem-portfolio

Customized Consumables



Eppendorf offers a broad range of consumables including a broad diversity of plates, tubes and tips. Whether you choose one of our standard products with a specific packaging or you prefer a customization, for example, a specific surface treatment, please contact us. We will support you with an optimized solution.

Customized tips for automation
Countless liquid handling workstations in the world work with Eppendorf conductive or non-conductive tips, benefitting from our high quality standards. Eppendorf tips for automation can cover a broad range of tasks in all major life science applications. Upon request, Eppendorf tips can also be equipped to comply with specific requirements.





Customized plates
Eppendorf offers a wide variety of plates: PCR, MTP and DWP. Plates can be customized, even to include specific barcoding using our automated barcode system. Plates can be provided in a number of customizable configurations: from labels, to 1D/2D barcodes to customer specific packaging.
Whether you choose one of our standard products with a specific packaging or you need a customization, please contact us.

Customized Instruments

Eppendorf offers you a choice from a variety of instrument configurations; covering your requirements for versatility, throughput, and speed (e.g. our epMotion® workstation). Request your customized solution today.



Watch our video about customized OEM consumables
www.eppendorf.link/oem-video

Digital Lab Management



Be prepared for tomorrow and ready for the future

Streamlined processes and operations are crucial for a successful laboratory. Once considered a vision, digitalization of the lab is becoming reality thanks to the advent of innovative digital lab solutions that aim to increase productivity when handling routine tasks in your lab.

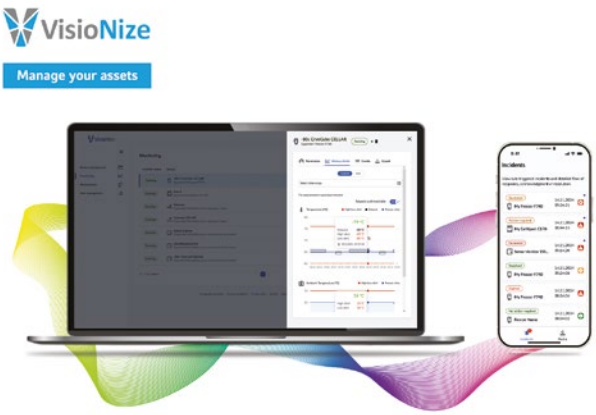
And when it comes to digitalization, connectivity is key.

There are numerous ways to optimize and improve your laboratory processes through digitalization.

General lab tasks such as device monitoring, maintenance planning or experiment documentation are more efficiently solved by using digital solutions.
Explore Eppendorf Digital Lab Solutions and make the switch to Digital Laboratory Management Solutions.


Lab Monitoring and Management with VisioNize® Lab Suite

One platform designed to empower you to focus on your next scientific breakthrough. VisioNize Lab Suite (VNLS) enables overall digital lab management including remote device monitoring, notifications and asset management options to improve sample safety, boost your lab's efficiency, enhance reproducibility as well as conformity with increasing compliance pressures. This gives you time to focus on what is important, your research!




Explore the gains of a digital, connected lab in our White Paper
www.eppendorf.link/whitepaper-lab-digitalization

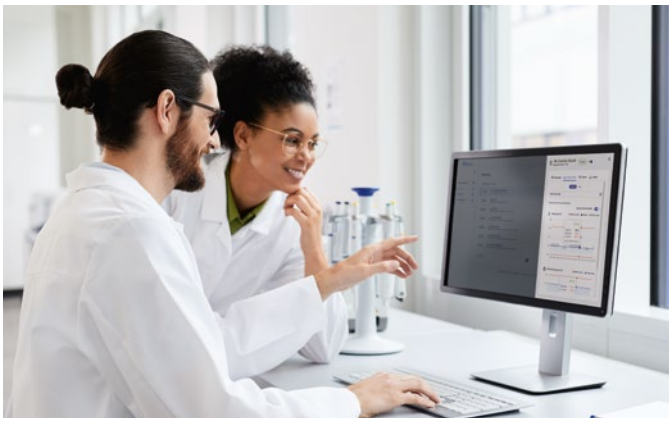Why switch to VisioNize® Lab Suite



Real-time device monitoring to ensure proper functioning devices and sample safety.
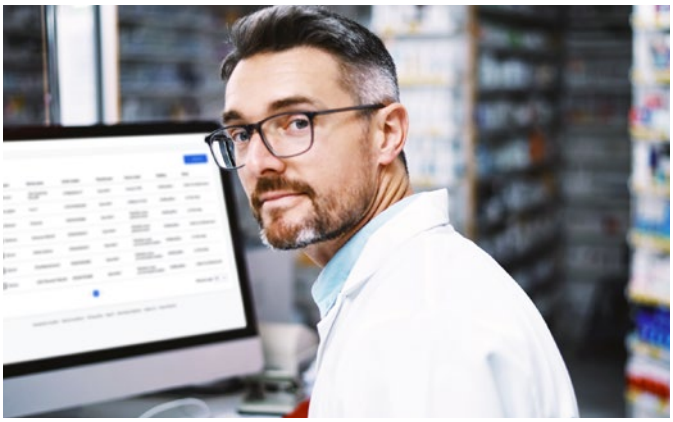
> Monitor your lab devices including incubators, freezers, and centrifuges from anywhere, at any time
> Track critical parameters in real-time, such as temperature, O_2 and CO_2 levels
> View performance history of your devices
> Securely store historical data and visualize it in chart and event list formats



Streamline your internal audits and eliminate your paper-based documentation.

> Quickly create reports for devices including:
  > Time, date and user details
  > Maintenance history
  > Events, alerts, notifications acknowledgement
  > Device trend data
> Benefit from detailed audit logs with device performance data, such as parameters, user interventions, and setpoint changes

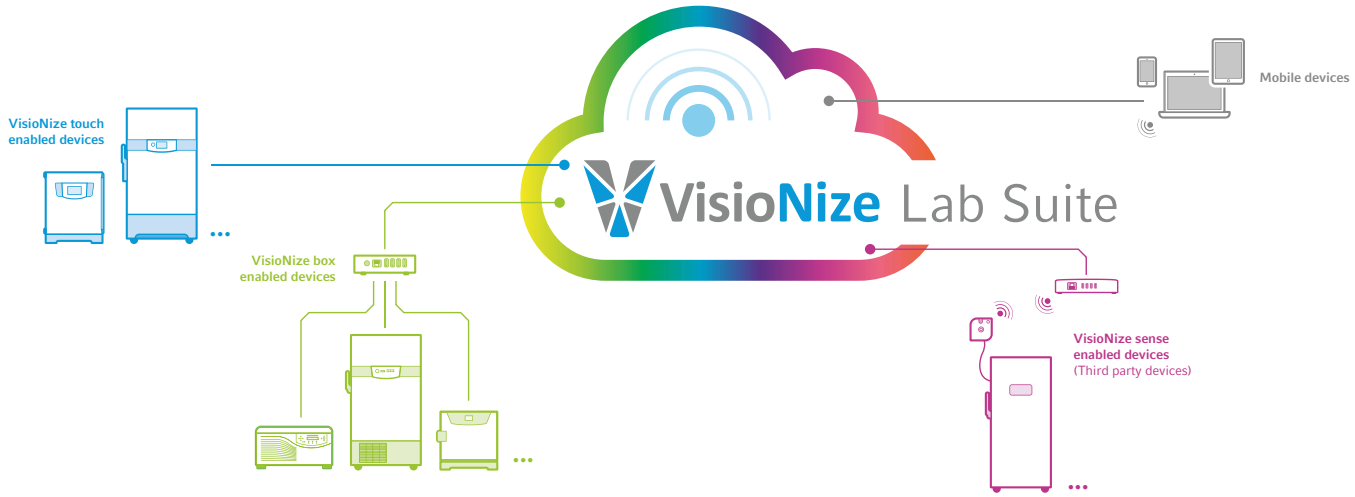


Know that your samples are secure and be on the safe side with precise decision making.

> User-defined notifications for alerts, events and more
> Real-time device data on your computer, tablet or smartphone
> User-defined alerts escalation scheme and acknowledgement for absent team member or assets with high value samples

Discover how VisioNize® Lab Suite can keep you lab and samples safe
www.eppendorf.link/visionize

Digital Lab Management



VisioNize® Lab Suite provides a universal laboratory digitization solution for monitoring instruments from incubators to freezers regardless of their manufacturer and minimizes unintended instrument downtime.





Enable connectivity for remote device monitoring

VisioNize® sense equipment is an all-in-one sensor system that works with VisioNize® Lab Suite to monitor the real-time status of devices and therefore protect integrity of samples. The system can capture, record and transfer even the smallest changes of your environmental conditions and can be used to monitor your lab rooms, CO_2 incubators, fridges or freezers from any supplier.

It includes an environmental monitoring sensor that measures ambient temperature, humidity, pressure and light, and a PT-100 extension that can measure temperature of any device (including ULT freezers) within the range of +60 to -90 °C.

Learn more about VisioNize sense
www.eppendorf.link/visionize-sense

Ordering information

Description	Order no.
VisioNize® Lab Suite Essentials plan, Free basic subscription for the first 3 connected devices. Includes monitoring, email notifications, remote updates, 7 days of live chart data and other essential features.	1112000309
VisioNize® Lab Suite Sample Safety+ plan, Includes all the functions of VisioNize Lab Suite Essentials plus SMS notifications, alert escalations, audit trail and extended data access.	1112000310
VisioNize® box 2, Hardware hub that serves as connection point for VisioNize sense equipment and additionally connects up to four qualified Eppendorf devices. Features WLAN connectivity.	1008000006
VisioNize® sense environmental monitor, a wireless, rechargeable multi-sensor unit (ambient temperature, humidity, pressure & light)	ESS1000002
VisioNize® sense temperature sensor, PT-100 extension that can measure temperature of any device (including ULT Freezers) within the range of +60 to -90 °C.	ESS1000003



Manual Liquid Handling

Eppendorf – Your Expert Partner for Liquid Handling

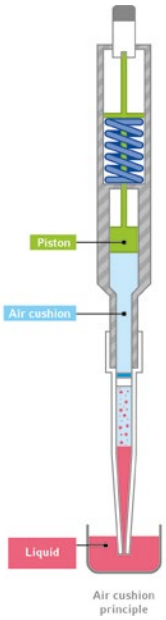


As the first company to launch a microliter pipette, we at Eppendorf have over 60 years' experience in precise manual and automated pipetting & dispensing to transfer the smallest quantities of liquids. Today, liquid handling systems from Eppendorf are used wherever accuracy, precision, and absolute reliability are important.

To make your lab work more efficient, ergonomic and less cumbersome, we offer a wide portfolio ranging from award-winning mechanical single- and multi-channel pipettes over electronic pipettes and dispensers to fully automated pipetting robots. Rest assured that you'll find the right liquid handling solution with Eppendorf.


How to Select the Right Liquid Handling System
Selecting the right pipette or dispenser can be the key to success in your work. It can boost your efficiency and throughput and ensure reliable results for different use cases. Here is a quick introduction to the basics:

Air-Cushion Principle
Air-cushion pipettes are most commonly used in labs around the world and ideal for liquids with physical properties similar to water. In this instrument type, the piston is separated from the liquid sample by a small air cushion. Temperature or humidity changes, as well as the physical properties of different liquids can affect the performance of air-cushion instruments. To reduce these risks however, Eppendorf air-cushion pipettes work with extra small air cushions and may be adjusted temporarily to different liquid types.




Air cushion principle

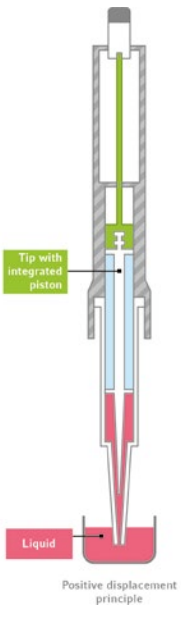Positive Displacement Principle
In positive displacement systems, the piston is part of the tip and in direct contact with the liquid. There is no air cushion that may be affected by liquid sample properties. These tools are therefore ideal for liquids with varying viscosity, volatility, surface tension or density as well as hot or cold liquids. The disposable tips with integrated pistons also prevent contamination and help to keep user and instrument safe when working with hazardous liquids.



Positive displacement principle

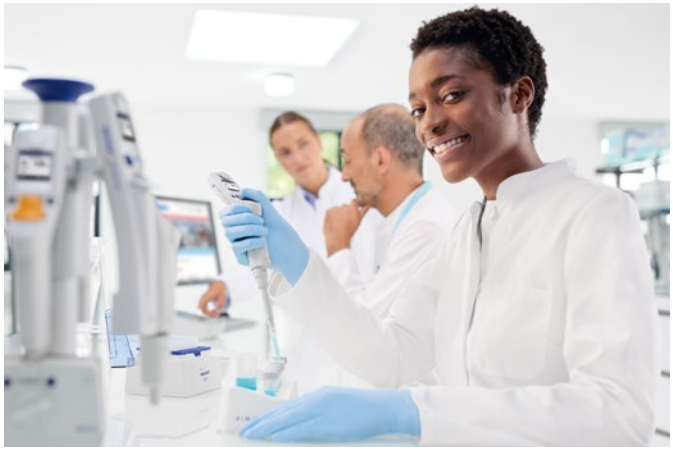Not sure which pipetting system to choose?
Check out our new finder app:
www.eppendorf.link/LH-Selection



When Should You Use an Electronic Instrument?
The most important general benefits of using an electronic instrument are: better ergonomics by requiring almost no operating forces, higher precision and reproducibility as well as an additional efficiency gain due to various operating modes (such as e.g. pipetting and dispensing with only one tool).



When Should You Think About an Automated Solution?
Automated liquid handling systems such as the epMotion® family are ideal to take over routine and repetitive pipetting tasks that are commonly found in many molecular biological applications. They are ideally suited whenever complex processes need to be standardized, help to reduce the risk of manual pipetting errors, increase reproducibility and free up your valuable time for other tasks.



Eppendorf Pipettes and Pipette Tips: An Unbeatable Combination

The mere fact that a tip fits onto a pipette cone is no guarantee for the performance of a liquid handling system, which comprises of the components instrument and tip. Eppendorf micropipettes and epT.I.P.S.® pipette tips are designed to work in perfect unison and to ensure a maximum of precision and accuracy. With our wide portfolio of variants and sizes as well as certified purity grades, our pipette tips offering is tailored to various requirements in today's labs.

Learn more at page 30



Ensure Consistent Results with our Maintenance, Calibration & Adjustment Services

Pipettes and dispensers are precision instruments with moving parts subject to normal wear and tear that may lead to imprecision over time. Therefore, regular maintenance and calibration are fundamental to the precision and accuracy of your instruments. We provide sincere, reliable services to help you maintain premium performance, and maximum safety of our instruments and your applications.

Learn more at page 8 in the "Service Products" chapter



Your Transition to the Lab of the Future – with Eppendorf

Digital solutions can make everyday lab work even safer and more efficient for you. Keep track of your instruments & samples and plan your next pipette calibration with our digital lab solutions.

Learn more at page 22 in the "Industries & Solutions" chapter

Do you already know everything there is about pipetting?
Download our comprehensive guidebook and improve your pipetting skills even more!
www.eppendorf.link/download-pipetting-guide

Our Portfolio – Your Choice

New







Model	Eppendorf Research® 3 neo	Eppendorf Research® plus	Eppendorf Reference® 2
Page(s)	**10**	**18**	**21**
Product type	Pipette	Pipette	Pipette
Operating mode	mechanical	mechanical	mechanical
Adjustable cone spacing	no	no	no
Pipetting type	Air-cushion system	Air-cushion system	Air-cushion system
Positioning	Adaptable, ergonomic, and reliable mechanical air-cushion pipette. Shorter operating button, fast volume adjustment, and volume lock	Light mechanical pipette with low operating forces for effortless pipetting	Fast and ergonomic single-button pipette with high precision and accuracy
Application	Pipetting of aqueous liquids, two-button operation	Pipetting of aqueous liquids, three-button operation	Pipetting of aqueous liquids, single-button operation
Volume range	0.1 µL – 10 mL	0.1 µL – 10 mL	0.1 µL – 10 mL
Available options	1-channel	1-channel 8-channel 12-channel 16-channel 24-channel	1-channel 8-channel 12-channel
Autoclavable	yes	yes	yes
Consumables	epT.I.P.S.®	epT.I.P.S.®, epT.I.P.S.® 384	epT.I.P.S.®
Purity grades of consumables	> Eppendorf Quality > PCR clean and sterile > Biopur® > Forensic DNA Grade	> Eppendorf Quality > PCR clean and sterile > Biopur® > Forensic DNA Grade	> Eppendorf Quality > PCR clean and sterile > Biopur® > Forensic DNA Grade
Open system (third party consumables)	yes	yes	yes

Get all the details of our pipetting portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/pipettes









Eppendorf Xplorer®/ Eppendorf Xplorer® plus	**Eppendorf Research® plus Move It®/ Eppendorf Xplorer® plus Move It®**	**Multipette® M4**	**Multipette® E3/ Multipette® E3x**
24	**14**	**52**	**53**
Pipette	Pipette	Dispenser	Dispenser
electronic	mechanical/electronic	mechanical	electronic
no	yes	no	no
Air-cushion system	Air-cushion system	Positive displacement system	Positive displacement system
Efficient, fast and precise pipetting with untiring battery power	Double your pipetting performance: fast and secure multiple sample transfer between different formats made easy	Speed up long dispensing series with low outside fault effects	Save time and accelerate long dispensing series, with high volume flexibility and lowest outside fault effects
Pipetting of aqueous liquids	Pipetting of aqueous liquids	Contamination-free dispensing (up to 100 steps per tip filling) of aqueous solutions and challenging liquids (e.g. viscous, volatile, dense...)	Contamination-free motor-driven dispensing (up to 100 steps per tip filling) of aqueous solutions and challenging liquids (e.g. viscous, volatile, dense...)
0.5 µL – 10 mL	1 – 1,200 µL	1 µL – 10 mL	1 µL – 50 mL
1-channel 8-channel 12-channel 16-channel 24-channel	4-channel 6-channel 8-channel 12-channel	1-channel	1-channel
yes (lower part)	yes/yes (lower part)	no	no
epT.I.P.S.®, epT.I.P.S.® 384	epT.I.P.S.®, epT.I.P.S.® 384	Combitips® advanced, ViscoTip®	Combitips® advanced, ViscoTip®
> Eppendorf Quality > PCR clean and sterile > Biopur® > Forensic DNA Grade	> Eppendorf Quality > PCR clean and sterile > Biopur® > Forensic DNA Grade	> Eppendorf Quality > PCR clean > Biopur® > Forensic DNA Grade	> Eppendorf Quality > PCR clean > Biopur® > Forensic DNA Grade
yes	yes	no	no

You will find detailed information on services for these products in the “Service Products” chapter.

Our Portfolio – Your Choice



Model	epT.I.P.S.®	epT.I.P.S.® Long	ep Dualfilter T.I.P.S.®	ep Dualfilter T.I.P.S.® SealMax®
Page(s)	34	37	36	36
Applications	> Pipetting liquids > Dispensing liquids > Mixing liquids > Filling plates and reaction vessels > Also available as epT.I.P.S.® BioBased. Made from 100 % renewable feedstock, according to mass-balance approach. > For applications with 384-well microplates, we recommend using 16- or 24-channel pipettes and epT.I.P.S.® 384		> DNA applications (e.g. PCR) > RNA applications (e.g. gene expression analysis) > Protein applications (e.g. antibody research) > Cell culture applications (e.g. media) > Applications with radioactive material > Also available as ep Dualfilter T.I.P.S.® BioBased and ep Dualfilter T.I.P.S. SealMax® BioBased > For applications with 384-well microplates, we recommend using 16- or 24-channel pipettes and ep Dualfilter T.I.P.S.® 384	

[1] An aerosol is a colloid of fine solid particles or liquid droplets, in air or another gas.



Model	Combitips® advanced
Page(s)	54
Applications	> Positive displacement dispenser tips (syringe tips) for use with Multipette® hand dispensers > High-precision dispensing regardless of the physical properties of the liquid (like e.g. viscosity, volatility, density or temperature) > Prevents aerosol contamination with hermetically sealed piston for secure dispensing > Provides protection from radioactive and toxic substances > Quick dispensing of long series with precise, repeated dispensing of identical volumes (with Multipette® hand dispensers)

Get all the details of our pipette tips portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/tips



epT.I.P.S.® 384

35

> Biochemical assays
> Cell based assays
> Immunoassays
> Storage of biological samples or chemical compounds
> Nucleic acid based methods
> Amplification
> Loading of agarose gels
> Purification
> Quantification
> Sequencing



ep Dualfilter T.I.P.S.® 384

35

> DNA applications (e.g. PCR)
> RNA applications (e.g. gene expression analysis)
> Protein applications (e.g. antibody research)
> Cell culture applications (e.g. media)
> Applications with radioactives
> All applications which use aerosol[1] binding liquids



ViscoTip®

54

> Positive displacement dispenser tips (syringe tips) for use with Multipette® hand dispensers
> For highly viscous liquids such as glycerol 99.5 %, Tween®, oils, creams, shampoos or honey
> Quick dispensing of long series with precise, repeated dispensing of identical volumes



Eppendorf Serological Pipets

57

> Transfer of liquids
> Mixing suspensions
> Combining reagents and chemical solutions
> Transferring cells for empirical analysis or expansion
> Layering reagents for creating higher density gradients

You will find detailed information on services for these products in the “Service Products” chapter.

Our Portfolio – Your Choice





Model	Varispenser® 2/Varispenser® 2x	Eppendorf Top Buret
Page(s)	60	59
Product type	Bottle-top dispenser	Bottle-top burette
Operating mode	mechanical	mechanical
Pipetting type	Positive displacement system	Positive displacement system
Positioning	Varispenser 2 / 2x bottle-top dispensers combine trusted technology with improved benefits for safe and easy dispensing of liquids without compromise.	Continuous and pulse-free manual titration
Application	Single stroke dispensing of lyes, acids, bases, aqueous liquids or solvents	Titration of aqueous liquids
Volume range	0.2 – 100 mL	0.1 – 999.9 mL
Available options		1-channel
Autoclavable	yes	no
Consumables	–	–
Purity grades of consumables	–	–
Open system (third party consumables)	–	–

Get all the details of our pipetting portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/pipettes





Easypet® 3	**Pipet Helper®**
56	**58**
Pipette controller	Pipette controller
electronic	mechanical
Air-cushion system	Air-cushion system
Overall ergonomic concept with speed control for stress-free pipetting	The robust and intuitive design makes it a perfect entry-level instrument
Pipetting of aqueous liquids with serological and volumetric pipettes	Pipetting of aqueous liquids with serological and volumetric pipettes
0.1 – 100 mL	0.1 – 100 mL
1-channel	1-channel
yes (pipette adapter and aspirating cone)	yes
Eppendorf Serological Pipets	Eppendorf Serological Pipets
Sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic.	Sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic.
yes	yes



Experience the quality and convenience you have trusted in for decades with Eppendorf Serological Pipets!

Designed to work in perfect harmony with your Easypet 3 or Pipet Helper, Eppendorf completes its portfolio in liquid handling with this serological pipette. For ease and flexibility, our serological pipettes can also be used with any other standard pipette controller.

Rely on precise graduations overlaid on ultra-clear pipette material for quick and easy volume readings from 0.1 mL to 50 mL. Enjoy the freedom of individually wrapped pipettes packaged in a robust dispenser box to ensure consistent premium quality.

See page 57.

You will find detailed information on services for these products in the “Service Products” chapter.

Eppendorf Research® 3 neo

Find your best fit with adaptability, precision, and comfort, all in your own hands.

With its innovative volume adjustment concept, ergonomic design and low operating forces, the new Eppendorf Research® 3 neo ensures comfortable pipetting for a wide variety of hand sizes. Experience the power of choice with faster or easier volume selection, improved temporary adjustment and new accessories. And you can of course always rely on the Research 3 neo for precise and consistent pipetting, crafted with the same excellence in liquid handling that has made Eppendorf pipettes renowned worldwide.
Currently available as single-channel pipettes with nominal volumes from 2.5 µL to 10 mL.



Product features
> Mechanical air-cushion pipette with **2-button operation** (one operating element for volume adjustment / pipetting, and one for tip ejection), and customizable settings for easy, ergonomic, and reliable pipetting
> **Shorter control button** with integrated volume adjustment enhances ergonomics for all and provides added comfort for small hands
> Unique **volume gear shift** to either speed up volume changes by up to 40% ('fast' setting) or fine-tune easily with just one hand ('easy' setting)

Applications
> Forward pipetting
> Reverse pipetting
> Removal of supernatants
> Sample mixing
> Phase extraction
> Filling of reaction vessels, plates, or gels



It's your pipette, your way
Research 3 neo offers a customizable pipetting experience with adjustable volume setting speeds, temporary adjustment settings, universal tip cones, and flexible marking rings. Experience precision and efficiency that is powered by choice!



Wave goodbye to muscular strain and fatigue
Streamline your pipetting and wave goodbye to muscular strain. Research 3 neo pipettes are light on hands, but heavy on precision, offering smoother operation and a better look than ever before.



Reliable pipettes you can trust
You're in safe hands with the Research 3 neo pipettes. Several components are designed to ensure reliable longevity, and accuracy and precision beyond ISO 8655 limits when used with epT.I.P.S.® pipette tips.

4-digit display
Easy and precise volume adjustment with high viewing angle.

New

Operating concept
Volume selection and pipetting in one button: Ergonomic for all with extra comfort for smaller hands.

Unique volume gear shift
Fast mode: up to 40 % quicker adjustment; Easy mode: easy one-handed fine-tuning.

Volume lock
Protects against unintentional volume changes.

Ergonomic design
Butter-smooth pipetting with low forces; comfortable curved shape and modern look.



Research 3 neo pipettes
Effortless pipetting with customizable settings, performance beyond ISO 8655, low weight and forces, high reliability, and full autoclavability.



Temporary adjustment
Adjust for liquid types, tip geometry, altitude and more to maintain accuracy without recalibration. The solid cover plug prevents lost stickers.

Open cone system
Optimized for Eppendorf tips but compatible with others. Spring-loading reduces attachment and ejection forces with Eppendorf tips.

PhysioCare concept

ACT. The Environmental Impact Factor Label

Ordering information

Description	Order no.
Eppendorf Research® 3 neo, 1-channel, variable, incl. epT.I.P.S.® Box 2.0 (x 96 tips) and ep Dualfilter T.I.P.S.® Rack (x 96 tips)	
0.1 – 2.5 µL, dark gray, ACT	3174000001
Eppendorf Research® 3 neo, 1-channel, variable, incl. epT.I.P.S.® Box 2.0 (x 96 tips) and ep Dualfilter T.I.P.S.® BioBased Reload (x 96 tips)	
0.5 – 10 µL, medium gray, ACT	3174000002
1 – 20 µL, light gray, ACT	3174000003
1 – 20 µL, yellow, ACT	3174000004
5 – 100 µL, yellow, ACT	3174000005
10 – 200 µL, yellow, ACT	3174000006
15 – 300 µL, orange, ACT	3174000007
50 – 1,000 µL, blue, ACT	3174000008
Eppendorf Research® 3 neo, 1-channel, variable, incl. epT.I.P.S.® sample bag (x 10 tips)	
0.1 – 2 mL, red, ACT	3174000009
0.25 – 5 mL, violet, ACT	3174000010
0.5 – 10 mL, turquoise, ACT	3174000011

Accessories

Description	Order no.
Locking ring for single-channel pipettes, for Eppendorf Research® 3, Xplorer/Xplorer plus, Research plus and Reference 2 single-channel pipettes, to prevent spring action in single-channel pipettes from 2.5 µL – 1,000 µL, 5 rings	3102637000
Pipette adjustment tool, for Eppendorf Research® 3 pipettes, 5 tools, grey	3102690000
Pipette temporary adjustment cover, for Eppendorf Research® 3 pipettes, 10 adjustment covers ADJ, white	3102603000
Pipette factory adjustment seal, for Eppendorf Research® 3 pipettes, 10 adjustment seals, red	3102603001
Pipette protection filter set, for Eppendorf Research® 3 single-channel pipettes, 2 mL, color code: red, 20 filters with 1 filter sleeve for 2 mL pipettes	3102635000
Pipette protection filter set, for Eppendorf Research® 3 single-channel pipettes, 5 mL, color code: violet, 20 filters with 1 filter sleeve for 5 mL pipettes	3102635001
Pipette protection filter set, for Eppendorf Research® 3 single-channel pipettes, 10 mL, color code: turquoise, 20 filters with 1 filter sleeve for 10 mL pipettes	3102635002

Learn more about the Research 3 neo:

www.eppendorf.link/research3neo

ColorTag Marking Rings - Accessory for All Pipettes



Make Your Mark

Make your pipette your own and keep track of essential information with our new ColorTag silicone pipette marking rings, available in six sizes and twelve colors.
ColorTag marking rings attach easily to any Eppendorf pipette, offering easy color-coded identification even from a distance. Customize them with your pen for personalized labeling!

Product features

> Flexibly label any pipette for personal use or specific applications
> Prevent errors from pipette misidentification
> Autoclavable and extensively tested for lab use

Ordering information

Eppendorf fit (fits pipette lower part, unless specified otherwise)	> 1-channel pipettes up to 1 mL	> Upper part of all pipettes > 2 mL pipettes	> 5 mL pipettes > Easypet® 3, aspirating cone	> 10 mL pipettes > All Multipette® dispensers > Easypet® 3, grip > Pipette Carousel 2 / Stand 2	> 8- or 16-channel pipettes > Eppendorf Top Buret > Varispenser® 2/2x	> 12- or 24-channel pipettes > Move It® pipettes
Size (inner Ø in mm)	**19 mm**	**24 mm**	**27 mm**	**34 mm**	**50 mm**	**73 mm**
Packaging	**10 pcs.**	**10 pcs.**	**5 pcs.**	**5 pcs.**	**5 pcs.**	**5 pcs.**
Color code						
light blue	3102660000	3102661000	3102662000	3102663000	3102664000	3102665000
light green	3102660001	3102661001	3102662001	3102663001	3102664001	3102665001
light yellow	3102660002	3102661002	3102662002	3102663002	3102664002	3102665002
light orange	3102660003	3102661003	3102662003	3102663003	3102664003	3102665003
light pink	3102660004	3102661004	3102662004	3102663004	3102664004	3102665004
light violet	3102660005	3102661005	3102662005	3102663005	3102664005	3102665005
neon blue	3102660010	3102661010	3102662010	3102663010	3102664010	3102665010
neon green	3102660011	3102661011	3102662011	3102663011	3102664011	3102665011
neon yellow	3102660012	3102661012	3102662012	3102663012	3102664012	3102665012
neon orange	3102660013	3102661013	3102662013	3102663013	3102664013	3102665013
neon pink	3102660014	3102661014	3102662014	3102663014	3102664014	3102665014
neon magenta	3102660015	3102661015	3102662015	3102663015	3102664015	3102665015


Description	**Order no.**
ColorTag pipette marking rings, sample bag with each size in 2 colors (all 12 colors included), for Eppendorf liquid handling instruments and other lab equipment	3102666000

Learn more about ColorTag rings:

www.eppendorf.link/colortag

Move It®! Transfer Multiple Samples Across Vessels

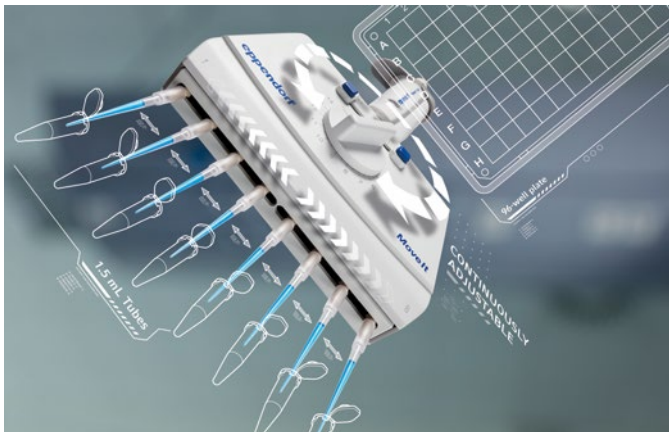Move It doubles your pipetting performance
Do you frequently transfer samples across different vessel formats, such as between tubes and plates, and strive for more efficient and safe solutions? The adjustable tip spacing pipette Move It® accelerates and simplifies synchronous pipetting of a series of samples. A unique design without tubing connections results in increased precision and durability as well as autoclavability, increasing user and sample safety.




Product features
> 4-, 6-, 8- and 12-channel air-cushion pipettes with variable volume and adjustable tip spacing option
> Available as mechanical (Research plus) and electronic (Xplorer plus) adjustable tip spacing multi-channel pipette
> For plates (384-, 96-, 48-, 24- and 12-well), tubes, agarose gels and more (depending on pipette variant)


Applications
> ELISA
> Cell culture
> Cell-based assays
> (Real time) PCR
> Mouse genotyping
> Blood analysis
> FACS analysis
> Media transfer
> Dilution series
> Screening

SCIENTISTS' CHOICE AWARDS 21 WINNER

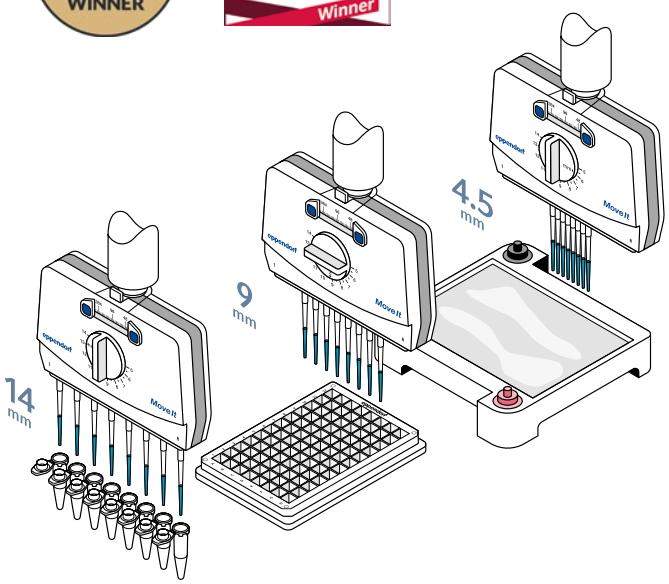Wiley Analytical Science Award Winner



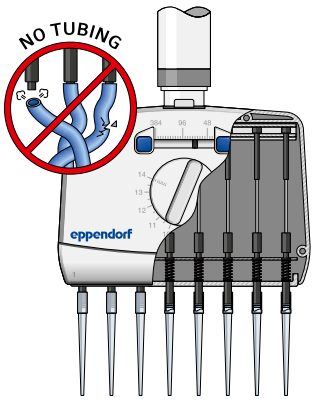Multiple sample transfer between different formats becomes fast and secure with Move It
Instead of pipetting many times, move 4 – 12 samples simultaneously. Reduces throughput time significantly.



Move It pipettes work without any tubing connections. Your benefits: fewer moving parts and a smaller air cushion increase durability and precision. Furthermore, the unique design makes autoclaving possible.[1)]

[1)] Research plus variants fully, Xplorer plus lower part only.







Learn more about Move It®:

www.eppendorf.link/move-it

Move It® - Adjustable Tip Spacing Pipettes Eppendorf Research® plus and Eppendorf Xplorer® plus

Move It selection guide
Look for source and destination formats according to your application and see which variant fits best.



Vessel Type			Type of tips	epT.I.P.S.®			epT.I.P.S.® 384	
			electronic/mechanical	Xplorer plus/Research plus			Xplorer plus/Research plus	
			Number of channels	4	6	8	8	12
			Volume	300 µL/1,200 µL	300 µL/1,200 µL	300 µL/1,200 µL	20 µL/100 µL	20 µL/100 µL
			Tip distance (mm)	9-33 mm	9-20 mm	9-14 mm	4.5-14 mm	4.5-9 mm
	4.5	384 Wells					■	■
	9	96 Wells	■	■	■	■	■	
	13	48 Wells	■	■	■	■		
	19	24 Wells	■	■				
	26	12 Wells	■					
	21-33	1.5/2.0/5.0/15 mL Tube	■					
	15-20	1.5/2.0/5.0/15 mL Tube	■	■				
	9-14	0.5/1.5/2.0 mL Tube	■	■	■	■		
	~4.5-9	Agarose gel	■[1)]	■[1)]	■[1)]	■	■	

[1)] Limited suitability due to volume and size of tips.

Move It® - Your Options



You have the choice

Mechanical Research plus pipettes are the workhorses for each lab. Xplorer plus electronic pipettes are the ideal choice if you need several pipetting modes (e.g. dispensing or pipetting & mixing) and an additional boost in ergonomics with motor-driven pistons.

Move It®, mechanical multi-channel pipettes, adjustable cone distance

Ordering information

Description		Order no.
Eppendorf Research® plus Move It®, 4-channel, 9-33 mm cone distance, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips		
30 – 300 µL, orange		3125000150
Eppendorf Research® plus Move It®, 4-channel, 9-33 mm cone distance, variable		
120 – 1,200 µL, dark green		3125000184
Eppendorf Research® plus Move It®, 6-channel, 9-20 mm cone distance, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips		
30 – 300 µL, orange		3125000168
Eppendorf Research® plus Move It®, 6-channel, 9-20 mm cone distance, variable		
120 – 1,200 µL, dark green		3125000192
Eppendorf Research® plus Move It®, 8-channel, 4.5-14 mm cone distance, variable, incl. epT.I.P.S.® Box 2.0 with 384 pipette tips		
1 – 20 µL, light pink		3125000117
5 – 100 µL, light yellow		3125000133
Eppendorf Research® plus Move It®, 8-channel, 9-14 mm cone distance, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips		
30 – 300 µL, orange		3125000176
Eppendorf Research® plus Move It®, 8-channel, 9-14 mm cone distance, variable		
120 – 1,200 µL, dark green		3125000206
Eppendorf Research® plus Move It®, 12-channel, 4.5-9 mm cone distance, variable, incl. epT.I.P.S.® Box 2.0 with 384 pipette tips		
1 – 20 µL, light pink		3125000125
5 – 100 µL, light yellow		3125000141


Move It®, electronic multi-channel pipettes, adjustable cone distance

Ordering information

Description		Order no.
Eppendorf Xplorer® plus Move It®, 4-channel, 9-33 mm cone distance, variable		
15 – 300 µL, orange		4861000816
50 – 1,200 µL, green		4861000833
Eppendorf Xplorer® plus Move It®, 6-channel, 9-20 mm cone distance, variable		
15 – 300 µL, orange		4861000817
50 – 1,200 µL, green		4861000834
Eppendorf Xplorer® plus Move It®, 8-channel, 4.5-14 mm cone distance, variable		
1 – 20 µL, light pink		4861000781
5 – 100 µL, light yellow		4861000794
Eppendorf Xplorer® plus Move It®, 8-channel, 9-14 mm cone distance, variable		
15 – 300 µL, orange		4861000818
50 – 1,200 µL, green		4861000835
Eppendorf Xplorer® plus Move It®, 12-channel, 4.5-9 mm cone distance, variable		
1 – 20 µL, light pink		4861000782
5 – 100 µL, light yellow		4861000795

384. Ready. Set. Pipette 16 or 24 Wells in Just One Step!

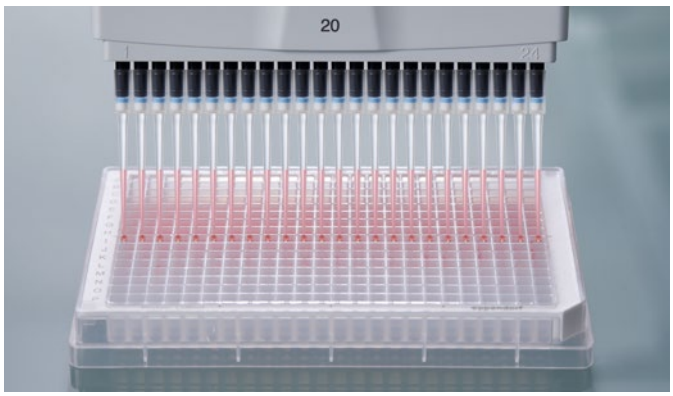Are you tired of pipetting into 384-well plates? Do you yearn for a convenient, ergonomic, and safe solution? Look no further than Eppendorf's innovative 16- and 24-channel pipetting system, designed to streamline your workflows and enhance your productivity.



Fill 384 wells within a minute

> No more tedious work and mistakes due to inconvenient alternate well pipetting with 8- and 12-channel pipettes
> Set up or validate an automated process manually and have a reliable backup system in place
> Increase your throughput today and change from 96- to 384-well plates

Eppendorf 16- and 24-channel pipettes are available as mechanical Research® plus or Eppendorf Xplorer® plus electronic pipettes for increased ergonomics and added versatility.





Superior ergonomics and precision with epT.I.P.S.® 384

epT.I.P.S. 384 and ep Dualfilter T.I.P.S.® 384 micropipette tips with innovative SoftAttach® technology are optimized for our 16- and 24-channel pipettes, as well as 20 µL and 100 µL Move It® adjustable tip spacing pipettes.



Your benefits

> Elastic forming groves provide a perfect seal while operating forces are reduced to a minimum
> Outstanding and reliable tip fit and tightness
> Reduced tip attachment and ejection forces

See page 42 for epT.I.P.S. 384 article numbers.

Learn more about our multi-channel pipettes:

www.eppendorf.link/multi-channel

Learn more about our 384-well plate pipetting system:

www.eppendorf.link/ready-set-pipette

Eppendorf Research® plus

The light pipette for effortless pipetting

The Eppendorf Research plus mechanical pipette is the result of over 60 years of experience in liquid handling and is one of the most commonly used pipettes in the world. Thanks to the pioneering Eppendorf PhysioCare Concept®, the Research plus is highly ergonomic and supports your health in the laboratory. It features very low weight and operation forces, is extremely reliable, fully autoclavable and easy to use.
With a variety of options available, including single-channel pipettes with fixed or variable volume, multi-channel pipette options with 8, 12, 16 or 24 channels, and our Research plus Move It® adjustable tip spacing micropipettes, we are confident that we can offer the right choice for your application.



Product features

> Mechanical air-cushion pipette with standard 3-button operation (one operating element for volume selection, one for pipetting, and one for tip ejection)
> Ideal for accurate, easy, and ergonomic manual pipetting of aqueous solutions
> Feel the difference in weight and pipetting forces: Designed according to the Eppendorf PhysioCare Concept® principles

Applications

> Forward pipetting
> Reverse pipetting
> Removal of supernatants
> Sample mixing
> Phase extraction
> Filling of plates, gels, and reaction vessels



A joy for your eyes - 4-digit volume display on Eppendorf Research® plus mechanical pipettes.

Learn more about the Research plus:

www.eppendorf.link/researchplus

Ordering information

Description		Order no.
Eppendorf Research® plus, 1-channel, fixed		
10 µL, medium gray		3124000016
10 µL, yellow		3124000024
20 µL, light gray		3124000032
20 µL, yellow		3124000040
25 µL, yellow		3124000059
50 µL, yellow		3124000067
100 µL, yellow		3124000075
200 µL, yellow		3124000083
200 µL, blue		3124000091
250 µL, blue		3124000105
500 µL, blue		3124000113
1,000 µL, blue		3124000121

Ordering information

Description		Order no.
Eppendorf Research® plus, 1-channel, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips		
0.1 – 2.5 µL, dark gray, ACT		3123000012
0.5 – 10 µL, medium gray, ACT		3123000020
2 – 20 µL, light gray, ACT		3123000098
2 – 20 µL, yellow, ACT		3123000039
10 – 100 µL, yellow, ACT		3123000047
20 – 200 µL, yellow, ACT		3123000055
30 – 300 µL, orange, ACT		3123000101
100 – 1,000 µL, blue, ACT		3123000063
Eppendorf Research® plus, 1-channel, variable, incl. epT.I.P.S.® 2.5 mL sample bag with 10 pipette tips		
0.25 – 2.5 mL, red, ACT		3123000144
Eppendorf Research® plus, 1-channel, variable, incl. epT.I.P.S.® 5 mL sample bag with 10 pipette tips		
0.5 – 5 mL, violet, ACT		3123000071
Eppendorf Research® plus, 1-channel, variable, incl. epT.I.P.S.® 10 mL sample bag with 10 pipette tips		
1 – 10 mL, turquoise, ACT		3123000080

Ordering information

Description		Order no.
Eppendorf Research® plus, 8-channel, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips		
0.5 – 10 µL, medium gray		3125000010
10 – 100 µL, yellow		3125000036
30 – 300 µL, orange		3125000052
Eppendorf Research® plus, 8-channel, variable		
120 – 1,200 µL, dark green		3125000214

Ordering information

Description		Order no.
Eppendorf Research® plus, 12-channel, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips		
0.5 – 10 µL, medium gray		3125000028
10 – 100 µL, yellow		3125000044
30 – 300 µL, orange		3125000060
Eppendorf Research® plus, 12-channel, variable		
120 – 1,200 µL, dark green		3125000222

Ordering information

Description		Order no.
Eppendorf Research® plus		
16-channel, variable, incl. epT.I.P.S.® Box 2.0 with 384 pipette tips, 1 – 20 µL, light pink		3125000079
16-channel, variable, incl. epT.I.P.S.® Box 2.0 with 384 pipette tips, 5 – 100 µL, light yellow		3125000095

Ordering information

Description		Order no.
Eppendorf Research® plus		
24-channel, variable, incl. epT.I.P.S.® Box 2.0 with 384 pipette tips, 1 – 20 µL, light pink		3125000087
24-channel, variable, incl. epT.I.P.S.® Box 2.0 with 384 pipette tips, 5 – 100 µL, light yellow		3125000109

Eppendorf Research® plus Multi-packs





Ordering information

Description	Order no.
Eppendorf Research® plus, 3-pack, 1-channel, variable, incl. 3x epT.I.P.S.® Box 2.0 (x 96 pipette tips) and ballpoint pen	
Option 1: 0.5 – 10 µL, 10 – 100 µL, 100 – 1,000 µL	3123000900
Option 2: 2 – 20 µL yellow, 20 – 200 µL, 100 – 1,000 µL	3123000918
Eppendorf Research® plus, 3-pack, 1-channel, variable, incl. 1x epT.I.P.S.® Box 2.0 (x 96 pipette tips), 2x epT.I.P.S. sample bags (x 10 pipette tips) and ballpoint pen	
Option 3: 100 – 1,000 µL, 0.5 – 5 mL, 1 – 10 mL	3123000926
Eppendorf Research® plus, 6-pack with Pipette Carousel 2, 1-channel, variable, incl. Pipette Carousel 2, 6x epT.I.P.S.® Box 2.0 (x 96 pipette tips) and ballpoint pen	
0.1 – 2.5 µL, 0.5 – 10 µL, 2 – 20 µL (yellow), 10 – 100 µL, 20 – 200 µL, 100 – 1,000 µL	3123000942

Accessories

Description	Order no.
Reagent reservoir Tip-Tub, autoclavable reservoir for multi-channel pipetting, 1 set = 10 reservoirs and 10 lids	0030058607
Grease for pipettes, incl. lint-free applicators, to relubricate the piston or cylinder in pipette lower parts	0013022153
Protection filter set, 2.5 mL, for Eppendorf Research® plus, Reference® 2 and Xplorer® (plus), 10 filters with 1 filter sleeve, for 2.5 mL pipettes, color code: red	4920622009
Protection filter set, 5 mL, for Eppendorf Research® plus, Reference® 2 and Xplorer® (plus), 10 filters with 1 filter sleeve, for 5 mL pipettes, color code: violet	4920623005
Protection filter set, 10 mL, for Eppendorf Research® plus, Reference® 2 and Xplorer® (plus), 10 filters with 1 filter sleeve, for 10 mL pipettes, color code: turquoise	4920624001
Safety plug tools, for Eppendorf Research® plus, to change the factory adjustment, 5 pcs.	3120639004
Adjustment tool, for Eppendorf Research® plus and Reference® 2, to change factory or temporary adjustment	3120633006
Adjustment seal ADJ, for Eppendorf Research® plus, red, 5 pcs.	3120636005
Pipette wrench 2 mL – 10 mL, to open single-channel pipette lower parts from 2 mL - 10 mL	3120634002
Multi-channel tool, for cutting the O-rings on tip cones of multi-channel pipettes, for 5 – 100 µL or 15 – 300 µL pipettes	3122610003
Multi-channel tool, for cutting the O-rings on tip cones of multi-channel pipettes, for 50 – 1,200 µL pipettes	4860736000
Unlocking tool, to open multi-channel lower parts of 1,200 µL pipettes	4861605006
Locking ring for single-channel pipettes, to prevent spring action in single-channel pipettes, for pipettes from 2.5 µL – 1,000 µL	3120635009
Locking clip for 8-channel pipettes, to prevent spring action in multi-channel pipettes, 2 pieces	3122612006
Locking clip for 12-channel pipettes, to prevent spring action in multi-channel pipettes, 3 pieces	3122613002
O-ring, red, for multi-channel pipette lower parts, 5 – 100 µL, 15 – 300 µL (1 set = 24 pcs)	3122611000
O-ring, red, for multi-channel pipette lower parts, 50 – 1,200 µL (1 set = 24 pcs)	4860716009
Lower part made of PTFE (higher chemical resistance)	
for Eppendorf Research® plus, single-channel, 0.5 – 5 mL, color code: violet, incl. dark grey ejector sleeve	3120642005
for Eppendorf Research® plus, single-channel, 100 – 1,000 µL, color code: blue, incl. dark grey ejector sleeve	3120641009
for Eppendorf Research® plus, single-channel, 1 – 10 mL, color code: turquoise, incl. dark grey ejector sleeve	3120646000

Eppendorf Reference® 2

A premium pipette that delivers extraordinary precision and accuracy
Choose the Eppendorf Reference 2 mechanical pipette with ergonomic single-button operation and benefit from its high precision and accuracy with reduced operating efforts. Its smooth surface and full autoclavability guarantee efficient decontamination - making it the ideal companion when working under sterile conditions. Available as a single-channel pipette in fixed or variable volume, and as 8- and 12-channel pipettes - all with time-saving single-button operation. Once you have experienced this unique operating philosophy you will not want to change back!

DESIGN AWARD *

* Golden Pin Design Award Winner 2017



PhysioCare concept

Product features
> Mechanical air-cushion pipette with outstanding precision and accuracy - operated with just one button for volume selection, pipetting and tip ejection
> With its innovative one-button operation, the Reference 2 allows fast and ergonomic handling with reduced operating efforts and active aerosol reduction. A clear haptic feedback helps to avoid accidental tip ejection
> 4-digit display with magnifying window for quick and secure volume setting and identification (clearly visible from every angle), incl. volume lock



An ideal companion when sterility matters
The Reference 2 pipette is easily disassembled, fully autoclavable, and features a smooth housing with minimal cavities, making it ideal for sterile environments



Exquisite stainless steel upper part
Equips the Reference 2 with outstanding robustness at potential impact sites. It includes quick volume setting and a secure volume lock.

Learn more about the Reference 2:

www.eppendorf.link/reference2

Eppendorf Reference® 2

Ordering information

Description	Order no.
Eppendorf Reference® 2, 1-channel, fixed	
1 µL, dark gray	4925000014
2 µL, dark gray	4925000022
5 µL, medium gray	4925000030
10 µL, medium gray	4925000049
10 µL, yellow	4925000057
20 µL, light gray	4925000065
20 µL, yellow	4925000073
25 µL, yellow	4925000081
50 µL, yellow	4925000090
100 µL, yellow	4925000103
200 µL, yellow	4925000111
200 µL, blue	4925000120
250 µL, blue	4925000138
500 µL, blue	4925000146
1,000 µL, blue	4925000154
2 mL, red	4925000162
2.5 mL, red	4925000170

Ordering information

Description	Order no.
Eppendorf Reference® 2, 1-channel, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips	
0.1 – 2.5 µL, dark gray	4924000010
0.5 – 10 µL, medium gray	4924000029
2 – 20 µL, light gray	4924000037
2 – 20 µL, yellow	4924000045
10 – 100 µL, yellow	4924000053
20 – 200 µL, yellow	4924000061
30 – 300 µL, orange	4924000070
100 – 1,000 µL, blue	4924000088
Eppendorf Reference® 2, 1-channel, variable, incl. epT.I.P.S.® 2.5 mL sample bag with 10 pipette tips	
0.25 – 2.5 mL, red	4924000096
Eppendorf Reference® 2, 1-channel, variable, incl. epT.I.P.S.® 5 mL sample bag with 10 pipette tips	
0.5 – 5 mL, violet	4924000100
Eppendorf Reference® 2, 1-channel, variable, incl. epT.I.P.S.® 10 mL sample bag with 10 pipette tips	
1 – 10 mL, turquoise	4924000118

Ordering information

Description	Order no.
Eppendorf Reference® 2, 8-channel, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips	
0.5 – 10 µL, medium gray	4926000018
10 – 100 µL, yellow	4926000034
30 – 300 µL, orange	4926000050
Eppendorf Reference® 2, 12-channel, variable, incl. epT.I.P.S.® Box 2.0 with 96 pipette tips	
0.5 – 10 µL, medium gray	4926000026
10 – 100 µL, yellow	4926000042
30 – 300 µL, orange	4926000069

Eppendorf Reference® 2 Multi-packs





Ordering information

Description	Order no.
Eppendorf Reference® 2, 3-pack, 1-channel, variable, incl. 3x epT.I.P.S.® Box 2.0 (x 96 pipette tips) and ballpoint pen	
Option 1: 0.5 – 10 µL, 10 – 100 µL, 100 – 1,000 µL	4924000908
Option 2: 2 – 20 µL yellow, 20 – 200 µL, 100 – 1,000 µL	4924000916
Eppendorf Reference® 2, 3-pack, 1-channel, variable, incl. 1x epT.I.P.S.® Box 2.0 (x 96 pipette tips), 2x epT.I.P.S. sample bags (x 10 pipette tips) and ballpoint pen	
Option 3: 100 – 1,000 µL, 0.5 – 5 mL, 1 – 10 mL	4924000924
Eppendorf Reference® 2, 6-pack with Pipette Carousel 2, 1-channel, variable, incl. Pipette Carousel 2, 6x epT.I.P.S.® Box 2.0 (x 96 pipette tips) and ballpoint pen	
0.1 – 2.5 µL, 0.5 – 10 µL, 2 – 20 µL (yellow), 10 – 100 µL, 20 – 200 µL, 100 – 1,000 µL	4924000940

Accessories

Description	Order no.
Reagent reservoir Tip-Tub, autoclavable reservoir for multi-channel pipetting, 1 set = 10 reservoirs and 10 lids	0030058607
Grease for pipettes, incl. lint-free applicators, to relubricate the piston or cylinder in pipette lower parts	0013022153
Protection filter set, 2.5 mL, for Eppendorf Research® plus, Reference® 2 and Xplorer® (plus), 10 filters with 1 filter sleeve, for 2.5 mL pipettes, color code: red	4920622009
Protection filter set, 5 mL, for Eppendorf Research® plus, Reference® 2 and Xplorer® (plus), 10 filters with 1 filter sleeve, for 5 mL pipettes, color code: violet	4920623005
Protection filter set, 10 mL, for Eppendorf Research® plus, Reference® 2 and Xplorer® (plus), 10 filters with 1 filter sleeve, for 10 mL pipettes, color code: turquoise	4920624001
Adjustment seal ADJ, red, for Eppendorf Reference® 2, incl. pin for removing the inserted seal, 1 set = 5 pieces	4920626004
Safety plug, red, for Eppendorf Reference® 2, incl. pin for removing the inserted safety plug, 1 set = 5 pieces	4920625008
Adjustment tool, for Eppendorf Research® plus and Reference® 2, to change factory or temporary adjustment	3120633006
Pipette wrench 2 mL – 10 mL, to open single-channel pipette lower parts from 2 mL - 10 mL	3120634002
Multi-channel tool, for cutting the O-rings on tip cones of multi-channel pipettes, for 5 – 100 µL or 15 – 300 µL pipettes	3122610003
Lower part made of PTFE (higher chemical resistance)	
for Eppendorf Reference® 2, single-channel, 100 – 1,000 µL, color code: blue, incl. dark grey ejector sleeve	4920627000
for Eppendorf Reference® 2, fixed, single-channel, 2 mL, color code: red, incl. dark grey ejector sleeve	4921610004
for Eppendorf Reference® 2, single-channel, 0.25 – 2.5 mL, color code: red, incl. dark grey ejector sleeve	4920629003
for Eppendorf Reference® 2, single-channel, 0.5 – 5 mL, color code: violet, incl. dark grey ejector sleeve	4920633000
for Eppendorf Reference® 2, single-channel, 1 – 10 mL, color code: turquoise, incl. dark grey ejector sleeve	4920636000
Locking ring for single-channel pipettes, to prevent spring action in single-channel pipettes, for pipettes from 2.5 µL – 1,000 µL	3120635009
O-ring, red, for multi-channel pipette lower parts, 5 – 100 µL, 15 – 300 µL (1 set = 24 pcs)	3122611000

Eppendorf Xplorer®/Eppendorf Xplorer® plus

Simple, fast and precise with untiring battery power – You deserve it!
People who give 100 % every day deserve the best tools and the best laboratory equipment. The Eppendorf Xplorer and Xplorer plus electronic pipettes are single-, 8-, 12-, 16- and 24-channel pipettes designed to aspirate and dispense liquid volumes from 0.5 µL to 10 mL, while eliminating many of the potential error risks associated with manual pipetting. With the Eppendorf Xplorer/Xplorer plus electronic pipette, your work achieves a new level of simplicity, precision and reproducibility. Also available as Move It® adjustable tip spacing multi-channel pipette (see page 32).



PhysioCare concept

ACT. The Environmental Impact Factor Label
*All single-channel variants.

Product features
> Electronic air-cushion pipette reaching new levels of simplicity, precision and reproducibility
> Intuitive handling via multi-function rocker with »up is up« (aspiration) and »down is down« (dispensing) logic and selection dial to access all pipetting modes
> Self-explanatory color display without cluttered submenus and with ergonomic viewing angle for optimal readability in every position

Applications
> Automated pipetting of liquids **(Pip)** for forward pipetting
> Manual pipetting **(Man)** for volume determination
> Pipetting and mixing **(P/M)** for automated mixing of samples
> Dispensing **(Dis)** for manual filling of plates, gels, and reaction vessels
> Automatic dispensing **(Ads)** for automated filling of plates, gels, and reaction vessels
> Multi aspiration **(Spc)**: Pooling supernatants from different vessels[1)]
> Sequential dispensing and pipetting **(Spc)** for user-defined volume steps[1)]
> Reverse pipetting **(Spc)** for non-aqueous solutions[1)]
> Diluting **(Spc)** for preparation of dilution series[1)]
> Fix volume **(Fix)**: Save up to 10 volumes for ease of operation[1)]

[1)] Xplorer plus only

Keep your Xplorer up to date with software updates

www.eppendorf.link/software-downloads

Learn more about the Xplorer:

www.eppendorf.link/xplorer

Eppendorf Xplorer®

Ordering information

Description	Order no.
Eppendorf Xplorer®, 1-channel	
0.5 – 10 µL, medium gray, ACT	4861000015
1 – 20 µL, light gray, ACT	4861000017
5 – 100 µL, yellow, ACT	4861000023
10 – 200 µL, yellow, ACT	4861000027
15 – 300 µL, orange, ACT	4861000031
50 – 1,000 µL, blue, ACT	4861000040
0.1 – 2.5 mL, red, ACT	4861000044
0.2 – 5 mL, violet, ACT	4861000058
0.5 – 10 mL, turquoise, ACT	4861000066

Ordering information

Description	Order no.
Eppendorf Xplorer®, 8-channel	
0.5 – 10 µL, medium gray	4861000104
5 – 100 µL, yellow	4861000120
15 – 300 µL, orange	4861000147
50 – 1,200 µL, green	4861000163

Ordering information

Description	Order no.
Eppendorf Xplorer®, 12-channel	
0.5 – 10 µL, medium gray	4861000112
5 – 100 µL, yellow	4861000139
15 – 300 µL, orange	4861000155
50 – 1,200 µL, green	4861000171

Eppendorf Xplorer® plus

Ordering information

Description	Order no.
Eppendorf Xplorer® plus, 1-channel	
0.5 – 10 µL, medium gray, ACT	4861000708
1 – 20 µL, light gray, ACT	4861000710
5 – 100 µL, yellow, ACT	4861000716
10 – 200 µL, yellow, ACT	4861000720
15 – 300 µL, orange, ACT	4861000724
50 – 1,000 µL, blue, ACT	4861000732
0.1 – 2.5 mL, red, ACT	4861000736
0.2 – 5 mL, violet, ACT	4861000740
0.5 – 10 mL, turquoise, ACT	4861000759

Ordering information

Description	Order no.
Eppendorf Xplorer® plus, 8-channel, variable	
0.5 – 10 µL, medium gray	4861000767
5 – 100 µL, yellow	4861000783
15 – 300 µL, orange	4861000805
50 – 1,200 µL, green	4861000821

Ordering information

Description	Order no.
Eppendorf Xplorer® plus, 12-channel, variable	
0.5 – 10 µL, medium gray	4861000775
5 – 100 µL, yellow	4861000791
15 – 300 µL, orange	4861000813
50 – 1,200 µL, green	4861000830

How to get started with Xplorer pipettes:

www.eppendorf.link/DiscoverXplorer

Eppendorf Xplorer® plus

Ordering information

Description	Order no.
Eppendorf Xplorer® plus, 16-channel, variable	
1 – 20 µL, light pink	4861000778
5 – 100 µL, light yellow	4861000792

Ordering information

Description	Order no.
Eppendorf Xplorer® plus, 24-channel, variable	
1 – 20 µL, light pink	4861000779
5 – 100 µL, light yellow	4861000793

Accessories

Description	Order no.
Reagent reservoir Tip-Tub, autoclavable reservoir for multi-channel pipetting, 1 set = 10 reservoirs and 10 lids	0030058607
Lithium polymer rechargeable battery, for Eppendorf Xplorer® pipette family	4861601000
Grease for pipettes, incl. lint-free applicators, to relubricate the piston or cylinder in pipette lower parts	0013022153
Power supply with plug adapters, for Eppendorf pipettes, multi-dispensers, pipette controllers and charging stand, 100 – 240 VAC / 5 VDC	4986603005
Pipette wrench 2 mL – 10 mL, to open single-channel pipette lower parts from 2 mL - 10 mL	3120634002
Multi-channel tool, for cutting the O-rings on tip cones of multi-channel pipettes, for 5 – 100 µL or 15 – 300 µL pipettes	3122610003
Multi-channel tool, for cutting the O-rings on tip cones of multi-channel pipettes, for 50 – 1,200 µL pipettes	4860736000
Unlocking tool, to open multi-channel lower parts of 1,200 µL pipettes	4861605006
Locking ring for single-channel pipettes, to prevent spring action in single-channel pipettes, for pipettes from 2.5 µL – 1,000 µL	3120635009
Locking clip for 8-channel pipettes, to prevent spring action in multi-channel pipettes, 2 pieces	3122612006
Locking clip for 12-channel pipettes, to prevent spring action in multi-channel pipettes, 3 pieces	3122613002
O-ring, red, for multi-channel pipette lower parts, 5 – 100 µL, 15 – 300 µL (1 set = 24 pcs)	3122611000
O-ring, red, for multi-channel pipette lower parts, 50 – 1,200 µL (1 set = 24 pcs)	4860716009

Eppendorf Pipette Holder System

Well within reach: the Eppendorf Pipette Holder System helps you to organize your lab
Save valuable bench space with the Eppendorf Pipette Holder System! With space for up to six single- or multi-channel pipettes, you can easily store all of your Eppendorf pipettes and multi-dispensers within easy reach. Our flexible carousels, stands and wall mount devices fit current Eppendorf manual liquid handling instruments as well as most of their predecessors.

New



> Pipette Carousel 2: Rotatable holder for six mechanical pipettes
> Charger Carousel 2: Carousel with intelligent charging electronics, capacity for up to six instruments (charges four instruments at a time and all six in turn) and magnetic power connector for fast and easy connection



> With Charger Stand 2, the Eppendorf Xplorer®/Xplorer plus or Multipette® E3/E3x is always fully charged and ready for use. Pipette Stand 2 carries one pipette or multi-dispenser
> Large rubber feet protect stands and carousels from liquids spilled on lab bench
> Charger Stand 2 with cord wrap functionality for more convenience

New



DESIGN AWARD*

reddot award 2018
winner

* Golden Pin Design Award Winner 2017

> Place your pipette and Multipette where you need them: Mounted to a wall, on the shelf above your bench or inside a biological safety cabinet
> Pictograms on the reversible holders allow for easy assignment of pipettes to their respective holder

Ordering information

Description	Order no.
New **Pipette Carousel 2, white**, with 6 holders for Eppendorf Research® 3 pipettes, additional pipette holders, compatible with other Eppendorf pipettes and dispensers, are sold separately	3116000236
Pipette Carousel 2, with 6 holders for Eppendorf Research®, Research plus, Reference, Reference 2, Biomaster® pipettes or epMotion® Tip Tools, additional pipette holders, compatible with other Eppendorf pipettes and dispensers, are sold separately	3116000015
Charger Carousel 2, with 6 charger shells for Eppendorf Xplorer®, Xplorer plus or Xplorer plus Move It® electronic pipettes and mains/power adapter, additional charger shells and holders, compatible with other Eppendorf pipettes and dispensers, are sold separately	3116000023
Charger Stand 2, with charger shell for one Eppendorf Xplorer®, Xplorer plus or Xplorer plus Move It® electronic pipette, operated with mains/power adapter supplied with Eppendorf electronic pipettes and dispensers	3116000031
Charger Stand 2, with charger shell for one Multipette® E3/E3x or Multipette® stream/Xstream electronic multi-dispenser, operated with mains/power adapter supplied with Eppendorf electronic pipettes and dispensers	3116000040
Pipette Stand 2, with pipette holder for one Multipette® M4 multi-dispenser, without charging function, additional pipette holders, compatible with other Eppendorf pipettes and dispensers, are sold separately	3116000058
New **Pipette Holder 2, white**, for one Eppendorf Research® 3 pipette, for Pipette Carousel 2, Charger Carousel 2, Pipette Stand 2 or wall mounting, sticky tape included	3116000295
Pipette Holder 2, for one Multipette® E3/E3x or Multipette® stream/Xstream electronic multi-dispenser, for Pipette Carousel 2, Charger Carousel 2, Pipette Stand 2 or wall mounting, sticky tape included, without charging function	3116000139
Pipette Holder 2, for one Eppendorf Research®, Research plus, Eppendorf Reference®, Reference 2, Biomaster® pipette or epMotion® Tip Tool, for Pipette Carousel 2, Charger Carousel 2, Pipette Stand 2 or wall mounting, sticky tape included, without charging function	3116000112
Pipette Holder 2, for one Eppendorf Xplorer®, Xplorer plus or Xplorer plus Move It® electronic pipette, for Pipette Carousel 2, Charger Carousel 2, Pipette Stand 2 or wall mounting, sticky tape included, without charging function	3116000120
Pipette Holder 2, for one Multipette® M4 multi-dispenser, for Pipette Carousel 2, Charger Carousel 2, Pipette Stand 2 or wall mounting, sticky tape included, without charging function	3116000147
Charger Shell 2, for one Eppendorf Xplorer®, Xplorer plus or Xplorer plus Move It® electronic pipette, for Charger Carousel 2 or Charger Stand 2, with charging function	3116602007
Charger Shell 2, for one Multipette® E3/E3x or Multipette® stream/Xstream electronic multi-dispenser, for Charger Carousel 2 or Charger Stand 2, with charging function	3116603003

The Perfect Fit – Eppendorf Pipette Tips

With respect to material, fit, design and operating forces, our pipette tips set standards. The close environment of each sample should be adapted to its specific quality and purity needs. This can involve a specific purity level or the absence of certain substances, but also stability, reliability of quality standard or geometry. Our epT.I.P.S. – Eppendorf Totally Integrated Pipetting System – have been developed to work in perfect combination with our pipettes. This results in reduced tip attachment and ejection forces while maintaining a complete seal between tip and pipette.

In the Eppendorf owned production facilities in the north of Germany, we can maintain the high standards in the selection and processing of plastic materials. Optimized wetting properties, high transparency, and special certified purity levels are the visible expression of this production philosophy.

Sustainability is playing an increasingly important role also in the laboratory. This is why Eppendorf searched for more sustainable manufacturing materials in order to conserve resources and offers now also pipette tips made of biobased polypropylene providing the same premium quality and purity our customers need for their experiments. For those parts, which do not come into direct contact with the sample, disposable Racks, we have begun to manufacture the undersides from "Post Consumer Recyclate" of industrial origin, obtained exclusively from leftover materials arising during the contact lens manufacturing process. This pure PP recyclate has identical properties in terms of stability and safety as the previously used virgin PP: Purity and sterility of pipette tips are not compromised in any way.

How to reduce laboratory waste volume by choosing the right packaging format. Depending on their purity grade, epT.I.P.S. pipette tips and ep Dualfilter T.I.P.S. filter pipette tips are available in a number of different packaging formats.

It is precisely the different forms of packaging that generate large proportions of laboratory waste. This can be remedied by optimizing the packaging with regard to the type of use, but also by reducing the amount of manufacturing material required.

Our challenge in developing the new epT.I.P.S. packaging design
For special applications that require a high degree of integrity and purity, there is no alternative to the disposable packaging form. But our disposable racks also had potential for plastic savings. We were able to save up to 30 % polypropylene (PP) in the production of the epT.I.P.S. and ep Dualfilter T.I.P.S. Racks for pre-sterilized pipette tips. Additionally we designed a new reload variant for pre-sterilized pipette tips like epT.I.P.S. BioBased Biopur and ep Dualfilter T.I.P.S. BioBased to be used with our well-known epT.I.P.S. Boxes 2.0. Where possible this new form of packaging is the more sustainable and plastic-saving alternative to disposable racks while maintaining sterility and purity. Up to 54 % polypropylene (PP) is saved and at the same time the waste volume generated in the laboratory is reduced by about 30%.

Depending on their purity grade, epT.I.P.S. pipette tips from Eppendorf are available in a number of different packaging formats:



ACT. The Environmental Impact Factor Label



ACT. The Environmental Impact Factor Label

epT.I.P.S.® Reloads
> Reduced waste as compared with disposable racks
> The refill trays can be autoclaved up to 121 °C, in packaging and without foil, for subsequent use
> The refill system, depending on tip size, is packaged as either dual-sided or in stack form

epT.I.P.S.® BioBased* Sterile Reloads
> available for epT.I.P.S.® BioBased Biopur®, ep Dualfilter T.I.P.S.® BioBased PCR clean/Sterile, ep Dualfilter T.I.P.S.® SealMax® Biopur®
> Less waste – reduce your waste volume up to 30 % compared to disposable racks
> Less raw material – reduced CO_2 – up to 54 % less raw material compared to disposable racks

*for more information see Page 8,9 in Sustainability chapter and 37 Manual Liquid Handling chapter

Get all the details of our pipette tips portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/tips



epT.I.P.S.® Box 2.0/epT.I.P.S.® Set
> Contamination-free transfer of Reloads to stable working box
> System optimized for use with multi-channel pipettes
> Color-coded trays for simple identification of tips and pipette



epT.I.P.S.® Racks
> Eppendorf Biopur® pipette tips in disposable Racks, the Rack body of which is made from "single-source" intra-type collection PP recyclate, have our highest degree of biological purity.
> Ensured PCR clean, sterile, pyrogen-, ATP- and DNA-free
> All pre-sterilized epT.I.P.S. and ep Dualfilter T.I.P.S. variants are available in Racks whose body is made of 100% recyclate



epT.I.P.S.® Singles
> Eppendorf Biopur pipette tip, individually wrapped
> Ensured PCR clean, sterile, pyrogen-, ATP- and DNA-free
> For use in pharmaceutical and food industry research, molecular biology and cell technology



epT.I.P.S.® Standard
> Original, high-quality Eppendorf pipette tips in resealable bags, also available as epT.I.P.S. Standard BioBased
> Available in sizes from 10 µL to 10 mL in Eppendorf Quality purity grade
> epT.I.P.S. Standard 200 µL, 300 µL and 1,000 µL tips are also available color-coded yellow and blue

Learn more about Eppendorf pipette tip quality
www.eppendorf.link/tip-quality

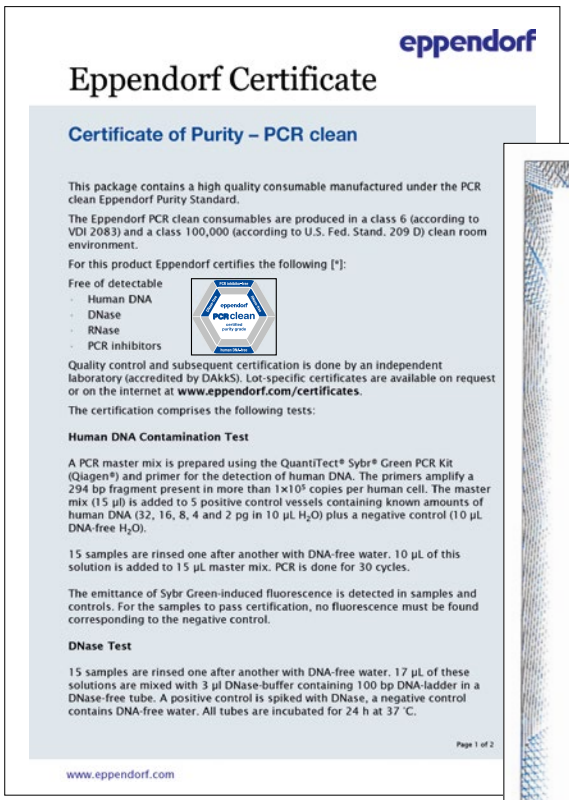
Which epT.I.P.S.® pipette tips fit to my Eppendorf pipette?
www.eppendorf.link/tip-combination

Eppendorf Purity Grades for Tips

epT.I.P.S.®, ep Dualfilter T.I.P.S.® and ep Dualfilter T.I.P.S.® SealMax® stand for our highest quality and purity
The high precision and accuracy of pipette tips and filter pipette tips is ensured by precise molding. Each lot of our pipette tips is subject to gravimetric measurement during final testing. Low wetting ensures reliable volume readings and minimal adhesion. Pipette tips made of PP (polypropylene). A relatively inert plastic characterized by low wettability as well as high dimensional and mechanical stability across a wide temperature range.
Our tips are available in a variety of purity grades
(See purity grades table on page 49).

Pure Quality at Eppendorf

www.eppendorf.link/purity


eppendorf

Eppendorf Certificate

Certificate of Purity – PCR clean

This package contains a high quality consumable manufactured under the PCR clean Eppendorf Purity Standard.

The Eppendorf PCR clean consumables are produced in a class 6 (according to VDI 2083) and a class 100,000 (according to U.S. Fed. Stand. 209 D) clean room environment.

For this product Eppendorf certifies the following [*]:

Free of detectable
- Human DNA
- DNase
- RNase
- PCR inhibitors

Quality control and subsequent certification is done by an independent laboratory (accredited by DAkkS). Lot-specific certificates are available on request or on the internet at **www.eppendorf.com/certificates**.

The certification comprises the following tests:

Human DNA Contamination Test

A PCR master mix is prepared using the QuantiTect® Sybr® Green PCR Kit (Qiagen®) and primer for the detection of human DNA. The primers amplify a 294 bp fragment present in more than 1×10⁵ copies per human cell. The master mix (15 µl) is added to 5 positive control vessels containing known amounts of human DNA (32, 16, 8, 4 and 2 pg in 10 µL H_2O) plus a negative control (10 µL DNA-free H_2O).

15 samples are rinsed one after another with DNA-free water. 10 µL of this solution is added to 15 µL master mix. PCR is done for 30 cycles.

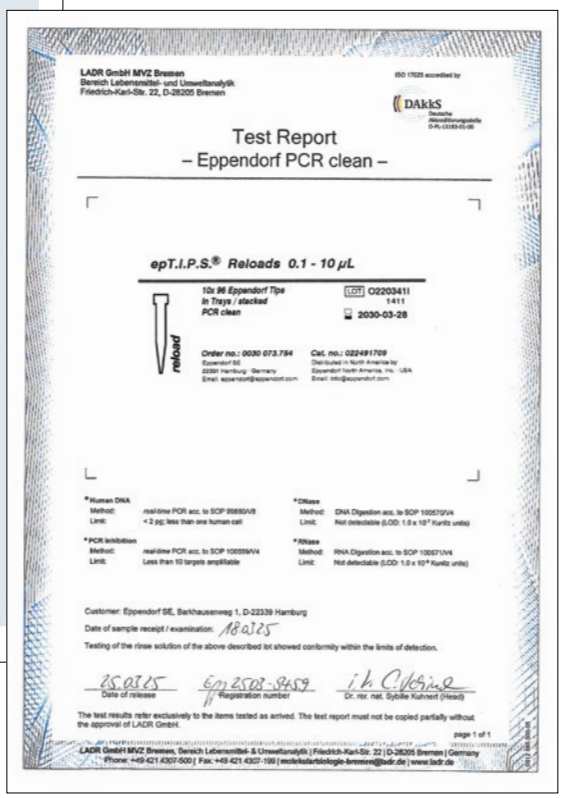
The emittance of Sybr Green-induced fluorescence is detected in samples and controls. For the samples to pass certification, no fluorescence must be found corresponding to the negative control.

DNase Test

15 samples are rinsed one after another with DNA-free water. 17 µL of these solutions are mixed with 3 µl DNase-buffer containing 100 bp DNA-ladder in a DNase-free tube. A positive control is spiked with DNase, a negative control contains DNA-free water. All tubes are incubated for 24 h at 37 °C.

Page 1 of 2

www.eppendorf.com


LADR GmbH MVZ Bremen
Bereich Lebensmittel- und Umweltanalytik
Friedrich-Karl-Str. 22, D-28205 Bremen

DAkkS

Test Report
– Eppendorf PCR clean –

epT.I.P.S.® Reloads 0.1 - 10 µL

10x 96 Eppendorf Tips
in Trays / stacked
PCR clean

LOT 02203411
1411
2030-03-28

reload

Order no.: 0030 073.754
Cat. no.: 022491709

*Human DNA
Method: real-time PCR acc. to SOP 95880V8
Limit: < 2 pg; less than one human cell

*DNase
Method: DNA Digestion acc. to SOP 100570V4
Limit: Not detectable (LOD: 1.0 x 10⁻³ Kuntz units)

*PCR inhibition
Method: real-time PCR acc. to SOP 100559V4
Limit: Less than 10 targets amplifiable

*RNase
Method: RNA Digestion acc. to SOP 100571V4
Limit: Not detectable (LOD: 1.0 x 10⁻³ Kuntz units)

Customer: Eppendorf SE, Barkhausenweg 1, D-22339 Hamburg

Date of sample receipt / examination: 18.03.25

Testing of the rinse solution of the above described lot showed conformity within the limits of detection.

18.03.25
Date of release

Ep 2503-8459
Registration number

i.h. C. Kühnert
Dr. rer. nat. Sybille Kuhnert (Head)


The test results refer exclusively to the items tested as arrived. The test report must not be copied partially without the approval of LADR GmbH.


page 1 of 1


LADR GmbH MVZ Bremen, Bereich Lebensmittel- & Umweltanalytik | Friedrich-Karl-Str. 22 | D-28205 Bremen | Germany
Phone: +49-421-4307-500 | Fax: +49-421-4307-199 | molekularbiologie-bremen@ladr.de | www.ladr.de











Pure quality

With the strictest control criteria, internally and externally monitored, we ensure the consistent high quality of our products – from lot to lot. Our consumables are available in a variety of purity qualities. Eppendorf Quality as well as more advanced purity grades:
"Sterile, Protein-free, PCR clean, Eppendorf Forensic DNA Grade, and Biopur®". In addition to our internal process controls and general quality certificates, lot-specific certificates are provided by an external accredited laboratory for the Sterile, Protein-free, PCR clean, Eppendorf Forensic DNA Grade, and Biopur purity grades. This allows us to consistently meet our customer's high demands when it comes to purity (www.eppendorf.link/purity). As a special service, we make the inspection certificate for each delivered lot available online (www.eppendorf.link/certificates).

www.eppendorf.link/PG_Guide

Purity grades **Eppendorf purity grades for tips**	**Eppendorf Quality**	**Eppendorf Sterile**	**Eppendorf PCR clean**	**Eppendorf PCR clean/Sterile**	**Eppendorf Forensic DNA Grade**[3]	**Biopur®**
Continuous quality control for the following relevant criteria:						
Function, tightness, precision	■	■	■	■	■	■
Low wetting	■	■	■	■	■	■
High chemical resistance	■	■	■	■	■	■
High thermal resistance	■	■	■	■	■	■
High transparency	■	■	■	■	■	■
Precisely shaped	■	■	■	■	■	■
Lot-specific certified1[1] for the following purity criteria:						
Pyrogen-free[4] (endotoxin-free)		■		■		■
Sterile (Ph.Eur./USP)		■		■		■
DNA-free[4] (Human DNA)			■	■	■	■
DNA-free[4] (Bacteria DNA)						■
DNase-free[4]			■	■	■	■
RNase-free[4]			■	■	■	■
PCR-inhibitor-free[4]			■	■	■	■
ATP-free[4]						■
Eppendorf tips						
epT.I.P.S.® Standard, Box and Set	■					
epT.I.P.S.® Reloads	■		■			
epT.I.P.S.® BioBased Reloads						■
epT.I.P.S.® Racks		■[2]				■
epT.I.P.S.® Singles						■
epT.I.P.S.® 384 Reload and Set	■		■			
ep Dualfilter T.I.P.S.®				■	■	
ep Dualfilter T.I.P.S.® BioBased				■		
ep Dualfilter T.I.P.S.® 384 Rack				■		
ep Dualfilter T.I.P.S.® SealMax®				■		
ep Dualfilter T.I.P.S.® SealMax® BioBased						■
Combitips advanced®	■	■[2]	■		■	■
ViscoTip®	■					
epT.I.P.S.® Motion	■	■				
epT.I.P.S.® Motion filtertips			■	■		

[1] Lot-specific certificate can be downloaded from www.eppendorf.com/certificates. [2] Only available in North America. [3] According to ISO 18385. [4] Testing showed conformity within the detection limits

epT.I.P.S.®

Description
epT.I.P.S. pipette tips – Eppendorf Totally Integrated Pipetting System – the perfect combination with Eppendorf pipettes, resulting in reduced-force tip attachment and ejection with complete sealing.



Product features
> New: epT.I.P.S.® BioBased Biopur® - made of 100 % bio-based PP according to mass-balance approach (check out www.eppendorf.link/BioBased for more information) - available in the new Reload Variant for pre-sterilized pipette tips and as epT.I.P.S. Standard BioBased Eppendorf Quality in resealable bags - help to reduce the usage of fossil oil-sourced manufacturing material, reduce the CO_2 footprint of your lab
> New Reload variant for pre-sterilized pipette tips reduces the use of plastic up to 54 % and the plastic waste up to 30 % compared to our disposable Racks
> Disposable Racks with body made from single-source intra-type collection PP recyclate, reclosable, optimized for safe stacking, in sterile packaging in accordance with DIN EN ISO 11607-1 and 2 and DIN EN 868-2 to 10

Applications
> Pipetting liquids
> Dispensing liquids
> Mixing liquids
> Filling plates and reaction vessels
> Filling gels for electrophoresis
> Phase extraction and removal of supernatants
> For applications in 384-microplate format we recommend using 16- or 24-channel pipettes together with epT.I.P.S. 384

epT.I.P.S.® Box 2.0 for epT.I.P.S.® Reloads




Product features
> epT.I.P.S.® Box 2.0 – empty reusable boxes for tip volumes of 10 µL - 5 mL
> epT.I.P.S.® Box 2.0 – all three sizes are availabe in Eppendorf Quality
> Autoclavable at 121 °C (20 min.) for subsequent use

Ordering information

Description	Order no.
epT.I.P.S.® Box 2.0 for epT.I.P.S.® Reloads, empty box, does not include tips	
Eppendorf Quality, 10 – 300 µL	0030076249
Eppendorf Quality, 1,000 – 1,250 µL	0030076257
Eppendorf Quality, 1,250 µL L – 5 mL	0030076265

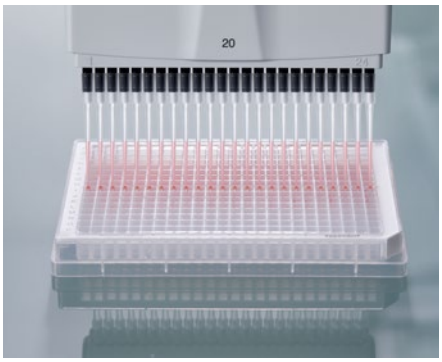epT.I.P.S.® 384



epT.I.P.S. 384 pipette tips with innovative SoftAttach® technology for 16- and 24-channel as well as adjustable tip spacing pipettes

epT.I.P.S. 384 micropipette tips with the innovative SoftAttach technology are optimized for use with Eppendorf Research® plus and Xplorer® plus 16- and 24-channel pipettes, as well as 20 µL and 100 µL Move It® adjustable tip spacing pipettes. Process 384-well plates manually with our highest level of tip tightness and alignment but extremely low operating forces.

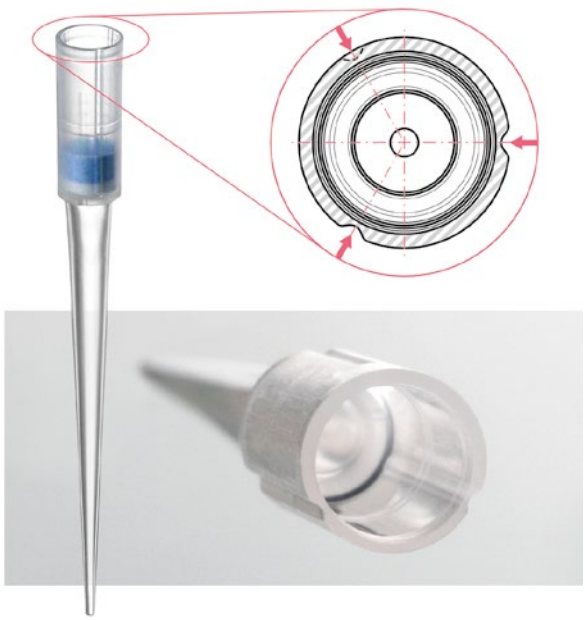
Product features

> epT.I.P.S. 384 pipette tips build a system together with the Research plus and Xplorer plus 16- and 24-channel pipettes as well as 20 µL and 100 µL Move It adjustable tip spacing pipettes for utmost safety and reliability
> Designed for a cone distance of 4.5 mm
> Innovative SoftAttach technology allows for reliable tip fit and tightness

The elastic forming grooves

As soon as the tips are attached, they adapt perfectly to the shape of the tip cone. This SoftAttach technology allows the user to achieve perfect tip tightness and safety with our system.

ep Dualfilter T.I.P.S.® 384



Description

ep Dualfilter T.I.P.S. 384 with the innovative SOFTattach technology are optimally coordinated to the Eppendorf 16- and 24-channel pipettes Research plus and Xplorer plus, as well as 20 µL and 100 µL Move It adjustable tip spacing pipettes. Process 384-well plates manually with highest level of filter pipette tip tightness and coaxiality but extraordinary low operating forces.

Product features

> ep Dualfilter T.I.P.S. 384 pipette tips build a system together with the Research plus and Xplorer plus 16- and 24-channel pipettes as well as 20 µL and 100 µL Move It adjustable tip spacing pipettes for utmost safety and reliability
> Innovative SOFTattach technology allows for reliable tip fit and tightness while operating forces are reduced to a minimum
> Fill a whole 384-well plate without loosening pipette tips

An extraordinary tip alignment

All tips are perfectly aligned, making it easy and safe to transfer up to 24 samples simultaneously to the 384-well plate.

ep Dualfilter T.I.P.S.®



Description
ep Dualfilter T.I.P.S. Filter Tips - The ultimate protection of pipette and sample against unintentional and unnoticed contamination by aerosols, drops and splashes.

Product features
> Dual protection against aerosols[1)] and biomolecules, such as mycoplasm, bacteria, viruses and DNA[2)]
> Dual protection for pipette and sample
> Free of PCR inhibitor additives

The unmistakable blue and white filter layers are made of flexible, hydrophobic material to fit perfectly in the tip cone and retain practically 100 % of all aerosols[1)] and biomolecules. This unique filtering effect is achieved using various well-defined pore sizes in the two filter layers.

[1)] An aerosol is a colloid of fine solid particles or liquid droplets, in air or another gas.

[2)] See Application Note 490 "No Trespassing for Bio-Aerosols! Approved Protection of Pipettes with ep Dualfilter T.I.P.S.® Filter Pipette Tips"

ep Dualfilter T.I.P.S.® SealMax®



Description
ep Dualfilter T.I.P.S. SealMax Self-Sealing Filter Tips - The combination of the well known unique two-phase filter protection of sample and pipette with an innovative liquid and moisture barrier.

Product features
> Reliable protection from liquids, aerosols[1)] and biomolecules, such as mycoplasm, bacteria, viruses and DNA[2)]
> Certificate of filter efficiency of class ISO 25 E in accordance with DIN EN ISO 29463-5 available here
> No PCR inhibiting additives

[1)] An aerosol is a colloid of fine solid particles or liquid droplets, in air or another gas.

[2)] See Application Note 490 "No Trespassing for Bio-Aerosols! Approved Protection of Pipettes with ep Dualfilter T.I.P.S.® Filter Pipette Tips"

Learn more about aerosol contamination

www.eppendorf.link/appnote490

epT.I.P.S.® Long



Description
epT.I.P.S. PipetteTips – Eppendorf Totally Integrated Pipetting System - the perfect combination with Eppendorf pipettes, resulting in reduced-force tip attachment and ejection with complete sealing.

Product features
> Slim design of the extra long epT.I.P.S. and ep Dualfilter T.I.P.S. pipette tips
> Always obtain high-quality results when pipetting from and into Eppendorf Tubes® 5.0 mL, conical tubes, cell culture flasks, deep wells and other deep vessels
> The risk of touching the walls of deep vessels is minimized and risk of cross-contamination is minimized

epT.I.P.S.® BioBased, ep Dualfilter T.I.P.S.® BioBased and ep Dualfilter T.I.P.S.® BioBased SealMax®



Description
Sustainability is playing an increasingly important role in the perception and purchasing decision of customers looking for laboratory consumables. The epT.I.P.S.® BioBased pipette tips, ep Dualfilter T.I.P.S.® BioBased and ep Dualfilter T.I.P.S.® SealMax® BioBased filter pipette tips in volumes up to 1,250 µL significantly reduce the product-related carbon footprint. The tips are made from 100 % renewable feedstock*, calculated according to mass-balance approach.** The tips are available as bulk and Reloads packaging (volume dependent).

* Filters are currently made from fossil-sourced material and will be changed to biobased material as soon as possible.

** Find more information at www.eppendorf.link/BioBased

Product features
> Produced according to ISCC plus standards and ACT label certified
> Same precision and accuracy as you are used to from Eppendorf pipette tips
> Filter tips offer dual protection against aersosols, such as mycoplasma, bacteria, viruses and DNA [2)]

[2)] See Application Note 490 "No Trespassing for Bio-Aerosols! Approved Protection of Pipettes with ep Dualfilter T.I.P.S.® Filter Pipette Tips"

Calculate your carbon savings

www.eppendorf.link/carbon-emission-saving-calculator

Manual Liquid Handling

Guide

Volume range/epT.I.P.S.®	Standard/Bulk	Reloads	Reloads	Box
dark gray	1,000 tips (2 bags × 500 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)	1 reusable box × 96 tips
0.1 – 10 µL, 34 mm	0030000811	0030073371	0030073754	0030076125
	0030080033 BioBased			
medium gray	1,000 tips (2 bags × 500 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)	1 reusable box × 96 tips
0.1 – 20 µL, 40 mm	0030000838	0030073398	0030073770	0030076133
	0030080041 BioBased			
light gray	1,000 tips (2 bags × 500 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)	1 reusable box × 96 tips
0.5 – 20 µL L, 46 mm	0030000854	0030073410	0030073797	0030076141
	0030080050 BioBased			
yellow	1,000 tips (2 bags × 500 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)	1 reusable box × 96 tips
2 – 200 µL, 53 mm	0030000889	0030073436	0030073819	0030076150
	0030080068 BioBased			
	0030000870 yellow tips			
orange	1,000 tips (2 bags × 500 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)	1 reusable box × 96 tips
20 – 300 µL, 55 mm	0030000900	0030073452	0030073835	0030076168
	0030080076 BioBased			
	0030000897 yellow tips			
blue	1,000 tips (2 bags × 500 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)	1 reusable box × 96 tips
50 – 1,000 µL, 71 mm	0030000927	0030073479	0030073851	0030076176
	0030080084 BioBased			
	0030000919 blue tips			
green	1,000 tips (2 bags × 500 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)	1 reusable box × 96 tips
50 – 1,250 µL, 76 mm	0030000935	0030073495	0030073878	0030076184
	0030080092 BioBased			
				

Guide

Set	Singles	Racks	Reloads
480 tips (5 trays × 96 tips), 1 reusable box 0030076290			
480 tips (5 trays × 96 tips), 1 reusable box 0030076303	100 tips, individually packed 0030010027	480 tips (5 racks × 96 tips) 0030075226	480 tips (5 trays × 96 tips) 0030075420 BioBased
480 tips (5 trays × 96 tips), 1 reusable box 0030076311			
480 tips (5 trays × 96 tips), 1 reusable box 0030076320	100 tips, individually packed 0030010043	480 tips (5 racks × 96 tips) 0030075234	480 tips (5 trays × 96 tips) 0030075439 BioBased
480 tips (5 trays × 96 tips), 1 reusable box 0030076338		480 tips (5 racks × 96 tips) 0030075242	480 tips (5 trays × 96 tips) 0030075447 BioBased
480 tips (5 trays × 96 tips), 1 reusable box 0030076346	100 tips, individually packed 0030010060	480 tips (5 racks × 96 tips) 0030075250	480 tips (5 trays × 96 tips) 0030075455 BioBased
480 tips (5 trays × 96 tips), 1 reusable box 0030076354		480 tips (5 racks × 96 tips) 0030075269	480 tips (5 trays × 96 tips) 0030075463 BioBased


Manual Liquid Handling

Guide

Volume range/epT.I.P.S.®	Standard/Bulk	Reloads	Reloads
dark green	1,000 tips (4 bags × 250 tips)	960 tips (10 trays × 96 tips)	960 tips (10 trays × 96 tips)
50 – 1,250 µL L, 103 mm	0030000730	0030073630	0030073649
	0030080106 BioBased		



red	500 tips (5 bags × 100 tips)	480 tips (10 trays × 48 tips)	480 tips (10 trays × 48 tips)
0.1 – 2.5 mL, 115 mm	0030000951	0030073517	0030073894
	0030080114 BioBased		



violet	500 tips (5 bags × 100 tips)		
0.1 – 5 mL, 120 mm	0030000978		
	0030080122 BioBased		



violet	300 tips (3 bags × 100 tips)		
0.2 – 5 mL L, 175 mm	0030000650		
	0030080130 BioBased		



turquoise	200 tips (2 bags × 100 tips)		
0.5 – 10 mL, 165 mm	0030000765		



turquoise	200 tips (2 bags × 100 tips)		
0.5 – 10 mL L, 243 mm	0030000781		




(Image reduzed size)

Guide

Box	Set	Racks	Reloads
1 reusable box × 96 tips 0030076192		480 tips (5 racks × 96 tips) 0030075277 Biopur®	480 tips (5 trays × 96 tips) 0030075471 BioBased
1 reusable box × 48 tips 0030076206	240 tips (5 trays × 48 tips), 1 reusable box 0030076362	240 tips (5 racks × 48 tips) 0030075285 Biopur®	
1 reusable box × 24 tips 0030076214		120 tips (5 racks × 24 tips) 0030075293 Biopur® 0030071638 Eppendorf Quality 0030071662 PCR clean	
		120 tips (5 racks × 24 tips) 0030075307 Biopur® 0030071646 Eppendorf Quality	
		120 tips (5 racks × 24 tips) 0030075315 Biopur® 0030071654 Eppendorf Quality	

Manual Liquid Handling

Guide

Volume range/ ep Dualfilter T.I.P.S.®/ ep Dualfilter T.I.P.S.® SealMax®	Racks			Reloads	
dark gray	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
0.1 – 10 µL S, 34 mm	0030078500	0030078691 SealMax		0030081021 BioBased	
					
medium gray	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
0.1 – 10 µL M, 40 mm	0030078519		0030078810	0030081030 BioBased	
					
light gray	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
0.5 – 20 µL L, 46 mm	0030078527	0030078705 SealMax		0030081048 BioBased	0030081234 SealMax BioBased
					
yellow	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
2 – 20 µL, 53 mm	0030078535		0030078829	0030081056 BioBased	
					
yellow	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
2 – 100 µL, 53 mm	0030078543	0030078713 SealMax		0030081064 BioBased	0030081242 SealMax BioBased
					
yellow	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
2 – 200 µL, 55 mm	0030078551	0030078721 SealMax	0030078837	0030081072 BioBased	0030081250 SealMax BioBased
					
orange	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
20 – 300 µL, 55 mm	0030078560	0030078730 SealMax		0030081080 BioBased	0030081269 SealMax BioBased
					
blue	960 tips (10 racks × 96 tips)			960 tips (10 trays × 96 tips)	
50 – 1,000 µL, 76 mm	0030078578	0030078748 SealMax	0030078845	0030081099 BioBased	0030081277 SealMax BioBased
					
dark green	480 tips (5 racks × 96 tips)			960 tips (10 trays × 96 tips)	
50 – 1,250 µL L, 103 mm	0030078594			0030081102 BioBased	
					

Volume range/ ep Dualfilter T.I.P.S.®	Racks
red	240 tips (5 racks × 48 tips)
0.1 – 2.5 mL, 115 mm	0030078586



violet	120 tips (5 racks × 24 tips)
0.1 – 5 mL, 120 mm	0030078616



violet	120 tips (5 racks × 24 tips)
0.2 – 5 mL L, 175 mm	0030078624



turquoise	100 tips, individually packed
0.5 – 10 mL L, 243 mm	0030077598



(Image reduced size)

Tips for 384-Well Pipetting Solutions

Volume range/epT.I.P.S.® 384	Reloads	Reloads	Set
light pink			
0.1 – 20 µL, 42 mm	3,840 tips (10 trays × 384 tips) 0030076001	3,840 tips (10 trays × 384 tips) 0030076044	1,920 tips (5 trays × 384 tips), 1 reusable box 0030076273
light yellow			
5 – 100 µL, 53 mm 	3,840 tips (10 trays × 384 tips) 0030076010	3,840 tips (10 trays × 384 tips) 0030076052	1,920 tips (5 trays × 384 tips), 1 reusable box 0030076281

Combination of Pipette Tips and Pipettes

New

Eppendorf Research® 3 neo	0.1 – 10 µL, dark gray	0.1 – 10 µL M, medium gray	0.1 – 20 µL, medium gray	0.5 – 20 µL L, light gray	2 – 20 µL, yellow	2 – 100 µL, yellow	2 – 200 µL, yellow
epT.I.P.S.® BioBased	■		■	■			■
epT.I.P.S.® Standard	■		■	■			■
epT.I.P.S.® BioBased Reloads			■		■	■	■
ep Dualfilter T.I.P.S.®	■	■		■	■	■	■
ep Dualfilter T.I.P.S.® BioBased Reloads		■		■	■	■	■
ep Dualfilter T.I.P.S.® SealMax®	■			■		■	■
ep Dualfilter T.I.P.S.® SealMax® BioBased Reloads				■		■	■
Fixed volume, 1-channel pipettes							
0.1 – 2.5 µL	■	●	●				
0.5 – 10 µL	●	■	■	●			
1 – 20 µL	◆	◆	●	■			
1 – 20 µL					■	■	■
5 – 100 µL					◆	■	■
10 – 200 µL					◆	◆	■
15 – 300 µL					◆	◆	◆
50 – 1,000 µL							
0.1 – 2 mL							
0.25 – 5 mL							
0.5 – 10 mL							

■ Test tip (other tips may require adjustment) ● Full volume range ◆ Limited volume range

Volume range/ep Dualfilter T.I.P.S.® 384	Racks
light pink	
0.1 – 20 µL, 42 mm 	3,840 tips (10 racks × 384 tips) 0030078853
light yellow	
5 – 100 µL, 53 mm 	3,840 tips (10 racks × 384 tips) 0030078861

20 – 300 µL, orange	50 – 1,000 µL, blue	50 – 1,250 µL, green	50 – 1,250 µL L, dark green	0.1 – 2.5 mL, red	0.1 – 5 mL, violet	0.2 – 5 mL L, violet	0.5 – 10 mL, turquoise	0.5 – 10 mL L, turquoise
■	■	■	■	■	■	■		
■	■	■	■	■	■	■	■	■
■	■	■	■					
■	■		■	■	■	■		■
■	■		■					
■	■							
■	■							
●								
●								
●								
■								
	■	●	●					
				■				
					■	●		
							■	●

Eppendorf Research® plus/ Eppendorf Research® plus Move It®	0.1 – 10 µL, dark gray	0.1 – 10 µL M, medium gray	0.1 – 20 µL, medium gray	0.5 – 20 µL L, light gray	0.1 – 20 µL, light pink	2 – 20 µL, yellow	2 – 100 µL, yellow	5 – 100 µL, light yellow	2 – 200 µL, yellow
epT.I.P.S.® BioBased	■		■	■					■
epT.I.P.S.® Standard	■		■	■	■			■	■
epT.I.P.S.® BioBased Reloads			■			■	■		■
ep Dualfilter T.I.P.S.®	■	■		■	■	■	■	■	■
ep Dualfilter T.I.P.S.® BioBased Reloads	■	■		■		■	■		■
ep Dualfilter T.I.P.S.® SealMax®	■			■			■		■
ep Dualfilter T.I.P.S.® SealMax® BioBased Reloads				■			■		■
Fixed volume, 1-channel pipettes									
10 µL	●	■	■	●					
20 µL			●	■					
10 µL						■	■		■
20 µL						■	■		■
25 µL/50 µL/100 µL							■		■
200 µL									■
200 µL/250 µL/500 µL/1,000 µL									
Variable volume, 1-, 8- and 12-channel pipettes									
0.1 – 2.5 µL	■	●	●						
0.5 – 10 µL	●	■	■	●					
2 – 20 µL	◆	◆	●	■					
2 – 20 µL						■	■		■
10 – 100 µL						◆	■		■
20 – 200 µL						◆	◆		■
30 – 300 µL						◆	◆		◆
100 – 1,000 µL									
120 – 1,200 µL									
0.25 – 2.5 mL									
0.5 – 5 mL									
1 – 10 mL									
Variable volume, 16- and 24-channel pipettes									
1 – 20 µL					■				
5 – 100 µL								■	
Move It®, variable volume, 4-, 6-, 8- and 12-channel pipettes									
1 – 20 µL					■				
5 – 100 µL								■	
30 – 300 µL						◆	◆		◆
120 – 1,200 µL									

■ Test tip (other tips may require adjustment) ● Full volume range ◆ Limited volume range

20 – 300 µL, orange	50 – 1,000 µL, blue	50 – 1,250 µL, green	50 – 1,250 µL L, dark green	0.1 – 2.5 mL, red	0.1 – 5 mL, violet	0.2 – 5 mL L, violet	0.5 – 10 mL, turquoise	0.5 – 10 mL L, turquoise
■	■	■	■	■	■	■		
■	■	■	■	■	■	■	■	■
■	■	■	■					
■	■		■	■	■	■		■
■	■		■					
■	■							
■	■							
●								
●								
●								
●								
	■	●	●					
●								
●								
●								
■								
	■	●	●					
		●	■					
				■				
					■	●		
							■	●
■								
		●	■					

Eppendorf Reference® 2	0.1 – 10 µL, dark gray	0.1 – 10 µL M, medium gray	0.1 – 20 µL, medium gray	0.5 – 20 µL L, light gray	2 – 20 µL, yellow	2 – 100 µL, yellow	2 – 200 µL, yellow	20 – 300 µL, orange
epT.I.P.S.® BioBased	■		■	■			■	■
epT.I.P.S.® Standard	■		■	■			■	■
epT.I.P.S.® BioBased Reloads			■		■	■	■	■
ep Dualfilter T.I.P.S.®	■	■		■	■	■	■	■
ep Dualfilter T.I.P.S.® BioBased Reloads		■		■		■	■	■
ep Dualfilter T.I.P.S.® SealMax®	■			■		■	■	■
ep Dualfilter T.I.P.S.® SealMax® BioBased Reloads				■		■	■	■
Fixed volume, 1-channel pipettes								
1 µL/2 µL	■	●	●					
5 µL/10 µL	●	■	■	●				
20 µL			●	■				
10 µL					■	■	■	●
20 µL					■	■	■	●
25 µL/50 µL/100 µL						■	■	●
200 µL							■	●
200 µL/250 µL/500 µL/1,000 µL								
2 mL/2.5 mL								
Variable volume, 1-, 8- and 12-channel pipettes								
0.1 – 2.5 µL	■	●	●					
0.5 – 10 µL	●	■	■	●				
2 – 20 µL	◆	◆	●	■				
2 – 20 µL					◆	◆	■	●
10 – 100 µL					◆	■	■	●
20 – 200 µL					■	■	■	●
30 – 300 µL					◆	◆	◆	■
100 – 1,000 µL								
0.25 – 2.5 mL								
0.5 – 5 mL								
1 – 10 mL								

■ Test tip (other tips may require adjustment) ● Full volume range ◆ Limited volume range

50 – 1,000 µL, blue	50 – 1,250 µL, green	50 – 1,250 µL L, dark green	0.1 – 2.5 mL, red	0.1 – 5 mL, violet	0.2 – 5 mL L, violet	0.5 – 10 mL, turquoise	0.5 – 10 mL L, turquoise
■	■	■	■	■	■		
■	■	■	■	■	■	■	■
■	■	■					
■		■	■	■	■		
■		■					
■							
■							
■	●	●					
			■				
■	●	●					
			■				
				■	●		
						■	●

Eppendorf Xplorer®/ Eppendorf Xplorer® plus/ Eppendorf Xplorer® plus Move It®	0.1 – 10 µL, dark gray	0.1 – 10 µL M, medium gray	0.1 – 20 µL, medium gray	0.5 – 20 µL L, light gray	0.1 – 20 µL, light pink	2 – 20 µL, yellow	2 – 100 µL, yellow	5 – 100 µL, light yellow	2 – 200 µL, yellow
epT.I.P.S.® BioBased	■		■	■					■
epT.I.P.S.® Standard	■		■	■	■			■	■
epT.I.P.S.® BioBased Reloads			■			■	■		■
ep Dualfilter T.I.P.S.®	■	■		■	■	■	■	■	■
ep Dualfilter T.I.P.S.® BioBased Reloads		■		■		■	■		■
ep Dualfilter T.I.P.S.® SealMax®	■			■			■		■
ep Dualfilter T.I.P.S.® SealMax® BioBased Reloads				■			■		■
Variable volume, 1-, 8- and 12-channel pipettes									
0.5 – 10 µL	●	■	■	●					
1 – 20 µL	◆	◆	●	■					
5 – 100 µL						◆	■		■
10 – 200 µL						◆	◆		■
15 – 300 µL						◆	◆		◆
50 – 1,000 µL									
50 – 1,200 µL									
0.1 – 2.5 mL									
0.2 – 5 mL									
0.5 – 10 mL									
Variable volume, 16- and 24-channel pipettes									
1 – 20 µL					■				
5 – 100 µL								■	
Move It®, variable volume, 4-, 6-, 8- and 12-channel pipettes									
1 – 20 µL					■				
5 – 100 µL								■	
15 – 300 µL						◆	◆		◆
50 – 1,200 µL									

■ Test tip (other tips may require adjustment) ● Full volume range ◆ Limited volume range

20 – 300 µL, orange	50 – 1,000 µL, blue	50 – 1,250 µL, green	50 – 1,250 µL L, dark green	0.1 – 2.5 mL, red	0.1 – 5 mL, violet	0.2 – 5 mL L, violet	0.5 – 10 mL, turquoise	0.5 – 10 mL L, turquoise
■	■	■	■	■	■	■		
■	■	■	■	■	■	■	■	■
■	■	■	■					
■	■		■	■	■	■		■
■	■		■					
■	■							
■	■							
■	■							
●								
●								
■								
	■	●	●					
	◆	■	●					
				■				
					■	●		
							■	●
■								
		■	●					

Multipette® M4



Aspirate liquid once and dispense up to 100 times without tip refill
Say goodbye to tedious, time-consuming serial pipetting! The Multipette M4 pipette from Eppendorf is our ideal solution for repetitive dispensing tasks in long series, eliminating the need for repeated liquid aspiration. In combination with Combitips® advanced dispenser tips, even viscous or volatile liquids that are difficult to pipette are no problem for the Multipette. With hermetically sealed tips, the system also offers a high level of safety for handling of infectious, toxic or radioactive liquids.

Product features
> Mechanical positive displacement multi-dispenser: fill the tip once and dispense up to 100 times without a refill
> Automatic Combitips® advanced dispenser tip recognition eliminates time-consuming volume calculations
> Easy-to-read display guarantees stress-free and intuitive operation with a digital display of the dispensing volume

Applications
> Repetitive dispensing of volumes in long series such as tube or plate filling, aliquoting reagents and kit usage
> Safe dispensing of toxic, radioactive and other hazardous liquids
> Precise and accurate dispensing of viscous solutions (e.g. glycerol) or liquids with high vapor pressure (e.g. ethanol)

ACT. The Environmental Impact Factor Label

PhysioCare concept

Video: Air cushion & positive displacement systems

www.eppendorf.link/pipetting-systems

Combitips® advanced/ Multipette® M4 technical data

www.eppendorf.link/MultipetteM4-data

Ordering information

Description	Order no.
Multipette® M4, 1-channel, incl. 1x Combitips® advanced 2.5 mL (green) tip and Pipette Holder 2, 1 µL – 10 mL, ACT	4982000012
Multipette® M4 Starter Kit, 1-channel, incl. Combitips® advanced Box 2.0, Combitips® advanced assortment pack (1 tip of each size) and Pipette Holder 2, 1 µL – 10 mL	4982000314
Pipette Holder 2, for one Multipette® M4 multi-dispenser, for Pipette Carousel 2, Charger Carousel 2, Pipette Stand 2 or wall mounting, sticky tape included, without charging function	3116000147
Battery CR2032, for Multipette® M4, 1 piece	4980215003

Multipette® E3/Multipette® E3x



Precise, safe, versatile and a dream to use over a long pipetting day!
These electronic dispensers combine easy handling during dispensing with a broad range of features! The Multipette E3x dispenser offers additional high-end applications, such as titration and aspirating of supernatants or sequential dilutions. In combination with the Combitips® advanced pipette tips, it is an essential lab tool for broad variety of liquid handling applications of liquid handling.

Product features
> Electronic positive displacement dispenser with several functions e.g. for dilution series, titration, automatic dispensing into microplates and vessel series
> Automatic Combitips® advanced pipette tip recognition: Eliminates time-consuming volume calculations, avoiding incorrect dispensing volumes
> Positive displacement principle: Precise, accurate and contamination-free dispensing of viscous solutions (e.g. glycerol), liquids with high vapor pressure (e.g. ethanol) or toxic, radioactive and other hazardous samples

Applications
> Dispensing **(Dis)** or Automatic dispensing **(Ads)** for repetitive (automated) dispensing of set volumes in long series such as tube or plate filling, aliquoting reagents and kit usage
> Pipetting **(Pip)** for refilling of liquids
> Sequential dispensing **(Seq)** to create dilution series[1)]
> Aspiration **(Asp)** for pooling of supernatants from different vessels[1)]
> Aspirate and dispensing **(A/D)** for pooling and volume determination with subsequent dispensing[1)]
> Titration **(Ttr)** for controlled dropwise dispensing and concentration determination[1)]

[1)] Multipette® E3x only

ACT. The Environmental Impact Factor Label

PhysioCare concept

Keep your E3/E3x up to date with the Pipette Software Update Tool

www.eppendorf.link/software-downloads

Combitips® advanced/ Multipette® E3 technical data

www.eppendorf.link/MultipetteE3-data

Ordering information

Description	Order no.
Multipette® E3, 1-channel, incl. charging cable and Combitips® advanced assortment pack (1 tip of each size), 1 µL – 50 mL, ACT	4987000010
Multipette® E3 bundle with charger stand, 1-channel, incl. charging cable, Charger Stand 2 and Combitips® advanced assortment pack (1 tip of each size), 1 µL – 50 mL, ACT	4987000371
Multipette® E3x, 1-channel, incl. charging cable and Combitips® advanced assortment pack (1 tip of each size), 1 µL – 50 mL, ACT	4987000029
Multipette® E3x bundle with charger stand, 1-channel, incl. charging cable, Charger Stand 2 and Combitips® advanced assortment pack (1 tip of each size), 1 µL – 50 mL, ACT	4987000380
Pipette Holder 2, for one Multipette® E3/E3x or Multipette® stream/Xstream electronic multi-dispenser, for Pipette Carousel 2, Charger Carousel 2, Pipette Stand 2 or wall mounting, sticky tape included, without charging function	3116000139
Lithium ion rechargeable battery, for Multipette® E3/E3x and Multipette (X)stream	4986602009
Power supply with plug adapters, for Eppendorf pipettes, multi-dispensers, pipette controllers and charging stand, 100 – 240 VAC / 5 VDC	4986603005

Combitips® advanced



Description
Optimize your workflows involving plates or large series of other vessels with Combitips advanced dispenser tips and accurately and precisely pipette both viscous and volatile liquids. These positive displacement pipette tips are your consumable of choice for all Multipette® multi-dispenser pipettes from Eppendorf and offer a variety of advantages in comparison to their predecessor Combitips plus. Available in nine volume sizes (0.1 mL – 50 mL), Combitips advanced have a maximum range of dispensing volumes with increments as low as 100 nanoliters depending on the Multipette model used.

Product features
> Combitips® advanced tips are the dedicated consumable for all Multipette® multi-dispenser pipettes from Eppendorf
> The 9 volume sizes (0.1 mL – 50 mL) offer a maximum range of dispensing volumes with increments as low as 100 nanoliters depending on the Combitips® advanced used
> Combitips® advanced are offered in four different purity grades to support a range of applications

Applications
> Positive displacement dispenser tips (syringe tips) for use with Multipette® hand dispensers
> High-precision dispensing regardless of the physical properties of the liquid (like e.g. viscosity, volatility, density or temperature)
> Prevents aerosol contamination with hermetically sealed piston for secure dispensing
> Provides protection from radioactive and toxic substances
> Quick dispensing of long series with precise, repeated dispensing of identical volumes (with Multipette® hand dispensers)

ViscoTip®



Easily master the highest viscosity liquids with your Multipette® from Eppendorf!
The latest member of the Combitips® advanced dispenser tip family, ViscoTip positive displacement tips, are specifically designed and optimized for handling high viscosity liquids up to 14,000 mPa*s such as glycerol 99.5 %, Tween®, oils, creams, shampoos, nail polish - even honey. So, if you need to dispense high viscosity liquids and you want to do it with ease, turn to ViscoTip.

Product features
> Specialized for liquids with a dynamic viscosity from 200 mPa*s to 14,000 mPa*s
> For dispensing volumes from 100 µL to 10 mL in increments of 10 µL
> Make life easier for your instrument: The new design of the tip means significantly lower operation forces are used, thus it speeds up work and reduces energy consumption

Applications
> Positive displacement dispenser tips (syringe tips) for use with with Multipette® hand dispensers
> For highly viscous liquids such as glycerol 99.5 %, Tween®, oils, creams, shampoos or honey
> Quick dispensing of long series with precise, repeated dispensing of identical volumes



Ordering information

Combitips® advanced	Color code	Eppendorf Quality 100 pcs. (4 bags × 25 pcs.)	PCR clean 100 pcs. (4 reclosable bags × 25 pcs.)	Biopur® 100 pcs., individually blister-wrapped	Forensic DNA Grade 100 pcs., individually blister-wrapped
0.1 mL	white	0030089405	0030089766	0030089618	
0.2 mL	light blue	0030089413	0030089774	0030089626	
0.5 mL	violet	0030089421	0030089782	0030089634	
1.0 mL	yellow	0030089430	0030089790	0030089642	0030089855
2.5 mL	green	0030089448	0030089804	0030089650	0030089863
5.0 mL	blue	0030089456	0030089812	0030089669	0030089871
10 mL	orange	0030089464	0030089820	0030089677	
25 mL [1]	red	0030089472	0030089839	0030089685	
50 mL [1]	light gray	0030089480	0030089847	0030089693	
ViscoTip®					
10 mL	orange	0030089502			
Accessories					
Adapter advanced					
25 mL, autoclavable, 1 piece	red	0030089715			
25 mL, autoclavable, 7 pcs., individually blister-wrapped	red			0030089731	
50 mL, autoclavable, 1 piece	light gray	0030089723			
50 mL, autoclavable, 7 pcs., individually blister-wrapped	light gray			0030089740	
Combitips® advanced Box 2.0, empty box for 8 Combitips® advanced (0.1 – 10 mL), Eppendorf Quality, 1 piece		0030089952			
Combitips® advanced Assortment Pack, contains one Combitips® advanced sample of each size and Adapter advanced 25 and 50 mL, Eppendorf Quality		0030089936			

[1] 4 boxes of 25 pcs. each. Each box containing one adapter.

Easypet® 3



Experience total control with the Easypet 3
Looking to simplify your manual liquid handling tasks in cell culture and other applications? The Easypet 3 electronic pipette controller from Eppendorf gives you precision and complete speed control, making it ideal for serial dispensing and resuspending bacterial or cell pellets. Easypet 3 can be used with all types of serological and volumetric pipettes from volumes of 0.1 – 100 mL.

Product features
> Electronic pipette controller designed for use with serological and volumetric pipettes
> Intuitive and convenient speed adjustment simply done with the tips of your fingers
> Lightweight, well-balanced and ergonomic design that allows for fatigue-free pipetting

Applications
> Liquid handling with serological and volumetric pipettes from 0.1 – 100 mL
> Serial dispensing of aliquots of different volumes
> Resuspension of bacteria or cell pellets
> Aspiration of cell layer from e.g. Ficoll® gradient

Technical specifications

Model	**Easypet® 3**
Pipetting type	Air-cushion system
Channel type	1-channel
Battery type	Rechargeable lithium polymer
Weight	160 g
Rechargeable battery	
Capacity	1,100 mAh/3.7 V
Charging time	~3 h
Number of dispensings	~2,000 (with a 25 mL pipette)
Operating mode	Electronic
Mains/power supply	
Input	100 V – 240 V AC ± 10 %, 50 Hz – 60 Hz, 0.5 A
Output	5 V DC, 1.0 A

Ordering information

Description	Order no.
Easypet® 3, 1-channel, incl. mains/power supply device, wall mounting device, shelf stand, 2 membrane filters 0.45 µm, 0.1 – 100 mL	4430000018
Membrane filter, for Easypet® 3, 0.2 µm, sterile, 5 pcs.	4430606005
Membrane filter, for Easypet® 3, 0.45 µm, sterile, 5 pcs.	4421601009
Lithium polymer rechargeable battery, for Easypet® 3	4430605009

Eppendorf Serological Pipets



Designed to work in perfect harmony with your Easypet® 3 or Pipet Helper®

Eppendorf Serological Pipets are single-use serological pipettes made of ultraclear plastic. They are designed to aspirate and dispense liquids using mechanical or electronic pipette controllers such as the Pipet Helper or Easypet 3.

Product features

> Clear and precise graduations for easy volume determination
> Color-coding for easy identification of pipet sizes
> Ultra-pure virgin polystyrene meeting the requirement of USP VI

Ordering information

Description	Color code	Volume	Order no.
Eppendorf Serological Pipets			
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic, 800 pcs. (4 × 200 pcs.), individually blister-wrapped	yellow	1 mL	0030127692
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic, 600 pcs. (4 × 150 pcs.), individually blister-wrapped	green	2 mL	0030127706
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic, 400 pcs. (4 × 100 pcs.), individually blister-wrapped	blue	5 mL	0030127714
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic, 400 pcs. (4 × 100 pcs.), individually blister-wrapped	orange	10 mL	0030127722
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic, 200 pcs. (4 × 50 pcs.), individually blister-wrapped	red	25 mL	0030127730
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free. Non-cytotoxic, 160 pcs. (4 × 40 pcs.), individually blister-wrapped	violet	50 mL	0030127749

Pipet Helper®



The mechanical pipette aid that allows inexperienced users to work like experts!
Make liquid handling tasks easier than ever with the Pipet Helper mechanical pipette aid from Eppendorf. Streamline lab applications such as assay preparation, petrochemical sample transfer, and preparing buffers for chromatography and fluids for fermentation. Ensuring high-precision manual aspiration and dispensing of liquids, the Pipet Helper is perfect also for less experienced users.

Product features
> Lightweight mechanical pipette controller with reduced operating force
> Easy maintenance and cleaning due to easy disassembly, few parts and fully autoclavable
> Comfortable working because of the good balance and pleasing material

Ordering information

Description	Order no.
Pipet Helper®, 1-channel, 0.1 – 100 mL	4423000010
Membrane filter, for Pipet Helper®, 3 µm, non-sterile, 10 pieces	4423601014

Eppendorf Top Buret



Continuous and pulse-free manual titration
The innovative Eppendorf Top Buret sets new standards in manual liquid titration. Its pulse-free dispensing technique means that exact volumes can be dispensed continuously, making titration simple, safe and precise. And with a user-friendly display and simple control features, this extremely sturdy digital bottle-top burette is really easy to use.

Product features
> Bottle-top burette with continuous, pulse-free dispensing technology for manual titration
> Digital display ranging from 0.01 mL to 999.9 mL, dosing rates: Model M: 2.5 mL per turn, Model H: 5 mL per turn
> Recirculation valve with valve lever

Ordering information

Description	Order no.
Eppendorf Top Buret M, manual bottle-top buret with discharge valve, telescopic aspiration tube and variable discharge tube, 2.5 mL per turn, digital display ranging from 0.01 – 999.9 mL, for 45 mm bottle thread, incl. 3 PP adapters for 40/38/32 mm threads, 2 micro batteries 1.5 V, certificate of conformity	4965000017
Eppendorf Top Buret H, manual bottle-top buret with discharge valve, telescopic aspiration tube and variable discharge tube, 5 mL per turn, digital display ranging from 0.01 – 999.9 mL, for 45 mm bottle thread, incl. 3 PP adapters for 40/38/32 mm threads, 2 micro batteries 1.5 V, certificate of conformity	4965000025

Accessories

Description	Order no.
Drying tube, for Eppendorf Top Buret, without drying agent	4960851000
Telescopic aspirating tube, for Eppendorf Top Buret, for 2.5 mL, 5 mL, 10 mL, 25 mL, 50 mL, 100 mL	4960805009
Batteries (2 pcs.), for Eppendorf Top Buret, LR03/AAA, 1.5 V	4965625009
Bottle thread adapter, PP, from GL 32 to GL 25	4960800040
Bottle thread adapter, PP, from GL 32 to GL 27	4960800139
Bottle thread adapter, PP, from GL 32 to GL/S 28	4960800058
Bottle thread adapter, PP, from GL 45 to GL 32	4960800120
Bottle thread adapter, PP, from GL 45 to GL 38	4960800155
Bottle thread adapter, PP, from GL 45 to S 40	4960800147
Bottle thread adapter, PP, from GL 32 to NS 19/26	4960800082
Bottle thread adapter, PP, from GL 32 to NS 24/29	4960800090
Bottle thread adapter, PP, from GL 32 to NS 29/32	4960800104

Learn more in our White Paper

www.eppendorf.link/WP-Buret

Watch how to properly use the Top Buret

www.eppendorf.link/buret

Varispenser® 2/Varispenser® 2x



Safe and easy dispensing of liquids from bottles without compromise

Need a bottle-top dispenser for aggressive solutions such as acids, solutions or bases? The Eppendorf bottle-top dispensers Varispenser 2 and Varispenser 2x allow you to safely dispense liquids from a wide range of bottles without reagent waste and are ideal for conveniently dispensing aliquots from large supply bottles. Chemically resistant and autoclavable, their tight seal provides protection against caustic media.

Product features

> Bottle-top dispenser with standard GL 45 thread for most common bottle threads in all sizes
> Safety valve balls in discharge valve prevent leakage when discharge tube is not mounted
> Air vent cap can be unscrewed for easy assembly of drying tube

Applications

> Single-stroke liquid dispensing directly from supply bottles or other big laboratory vessels
> Recommended for a large variety of aqueous liquids, lyes, acids, bases or solvents (check Operating Manual for list)
> Suitable for liquids up to 2.2 g/cm³ (density), 500 mbar (vapor pressure), 500 mm²/ s (kinematic viscosity)

Learn more in our White Paper

www.eppendorf.link/WP-Varispenser

Varispenser® 2/ Varispenser® 2x technical data

www.eppendorf.link/ Varispenser-data

Ordering information

Description	Order no.
Varispenser® 2, 1-channel, bottle-top dispenser with telescopic intake tube (length 125 – 240 mm)	
0.2 – 2 mL, incl. adapters GL 25, GL 28/S 28, GL 32, GL 38, S 40	4966000010
0.5 – 5 mL, incl. adapters GL 25, GL 28/S 28, GL 32, GL 38, S 40	4966000029
1 – 10 mL, incl. adapters GL 25, GL 28/S 28, GL 32, GL 38, S 40	4966000037
Varispenser® 2, 1-channel, bottle-top dispenser with telescopic intake tube (length 170 – 330 mm)	
2.5 – 25 mL, incl. adapters GL 32, GL 38, S 40	4966000045
5 – 50 mL, incl. adapters GL 32, GL 38, S 40	4966000053
10 – 100 mL, incl. adapters GL 32, GL 38, S 40	4966000061
Varispenser® 2x, 1-channel, bottle top dispenser with recirculation valve and telescopic intake tube (length 125 – 240 mm)	
0.2 – 2 mL, incl. adapters GL 25, GL 28/S 28, GL 32, GL 38, S 40	4967000014
0.5 – 5 mL, incl. adapters GL 25, GL 28/S 28, GL 32, GL 38, S 40	4967000022
1 – 10 mL, incl. adapters GL 25, GL 28/S 28, GL 32, GL 38, S 40	4967000030
Varispenser® 2x, 1-channel, bottle top dispenser with recirculation valve and telescopic intake tube (length 170 – 330 mm)	
2.5 – 25 mL, incl. adapters GL 32, GL 38, S 40	4967000049
5 – 50 mL, incl. adapters GL 32, GL 38, S 40	4967000057
10 – 100 mL, incl. adapters GL 32, GL 38, S 40	4967000065

Accessories

Description	Order no.
Drying tube, for Varispenser® 2/2x, without filling, including sealing washer (PTFE)	4966509002
Ventilation screw, for microfilters with Luer connector, PP, with PTFE sealing washer	4966511007
Ventilation screw, for Varispenser® 2/2x, PP	4966601006
Discharge tube, for Varispenser® 2/2x, spiraled, for 2 mL, 5 mL, 10 mL	4966501001
Discharge tube, for Varispenser® 2/2x, spiraled, for 25 mL, 50 mL, 100 mL	4966502008
Telescopic aspirating tube, FEP; for Varispenser® 2/2x, 70 mm – 140 mm, for 2 mL, 5 mL, 10 mL	4966503004
Telescopic aspirating tube, FEP; for Varispenser® 2/2x, 125 mm – 240 mm, for 2 mL, 5 mL, 10 mL	4966504000
Telescopic aspirating tube, FEP; for Varispenser® 2/2x, 195 mm – 350 mm, for 2 mL, 5 mL, 10 mL	4966505007
Telescopic aspirating tube, FEP; for Varispenser® 2/2x, 250 mm – 480 mm, for 2 mL, 5 mL, 10 mL	4966506003
Telescopic aspirating tube, FEP; for Varispenser® 2/2x, 250 mm – 480 mm, for 25 mL, 50 mL, 100 mL	4966508006
Telescopic aspirating tube, FEP; for Varispenser® 2/2x, 170 mm – 330 mm, for 25 mL, 50 mL, 100 mL	4966507000
Bottle thread adapter, PP, from GL 32 to GL 25	4960800040
Bottle thread adapter, PP, from GL 32 to GL 27	4960800139
Bottle thread adapter, PP, from GL 32 to GL/S 28	4960800058
Bottle thread adapter, PP, from GL 45 to GL 32	4960800120
Bottle thread adapter, PP, from GL 45 to GL 38	4960800155
Bottle thread adapter, PP, from GL 45 to S 40	4960800147
Bottle thread adapter, ETFE, from GL 32 to GL 25	4966614000
Bottle thread adapter, ETFE, from GL 32 to GL/S 28	4960835005
Bottle thread adapter, ETFE, from GL 45 to GL 32	4966615007
Bottle thread adapter, ETFE, from GL 45 to GL 38	4960839000
Bottle thread adapter, PTFE, from GL 45 to S 40	4960834009
Thread adapter, for jerrycan 5 L, ETFE, from 45 mm to 17/8'' thread	4960832006

Automated Pipetting



We do not want you to work like a robot, so simply let our epMotion devices do the work for you. Automation liberates you by allowing you to concentrate on tasks that require not only your hands but first and foremost your brain.

The epMotion® line of automated liquid handling systems from Eppendorf offer pipetting solutions for low, medium, and high-throughput workflows that can dramatically increase the consistency of your liquid handling tasks.

At Eppendorf, we also provide a wide range of consumables and accessories to extend the versatility and scalability of our epMotion workstations, ensuring that our automated liquid handling systems meet the specific needs of your laboratory.

Why lab automation?

www.eppendorf.link/choose-a-robot

Automated pipetting workstations

The epMotion family of liquid handling workstations allows you to easily automate reagent kits and standardized protocols which can be tedious, time-consuming, or error-prone when performed manually. In addition, automating your workflow can minimize the exposure to potentially infectious/hazardous agents, free up time for other tasks, increase your reproducibility, standardize your processes and increase your throughput.

Molecular biology methods and genomic workflows are our application focus. We offer easy-to-use, but powerful automated solutions for PCR and qPCR, nucleic acid purification, and Next Generation Sequencing (NGS) library preparation.

Automate your workflow!

www.eppendorf.link/epmotionmethods/

Get all information about the Eppendorf automation portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/automation-portfolio

Automated pipetting consumables & accessories

Ensure your workflow is as efficient as possible with our epT.I.P.S.® Motion range of pipetting supplies, designed for use with epMotion workstations. All our liquid handling consumables are available in a range of purity grades and are manufactured under strict compliance with ISO regulations.

Optimize your liquid handling workflow with accessories designed for use with epMotion workstations. These accessories extend the functions of our liquid handling robots and enable you to automate more of your protocol for consistent sample processing.





Download the automation brochure here
www.eppendorf.link/epmotionbrochure

Our Portfolio – Your Choice

New





Model	epMotion® 96 Flex	epMotion® 5070
Page(s)	**8**	**9**
Dimensions (W × D × H)	34.5 × 41.5 × 62 cm / 13.6 × 16.2 × 24.4 in	65 × 48 × 63 cm / 26 × 19 × 25 in
Weight w/o accessories	19.0 kg / 42.0 lb	45 kg / 99.2 lb
Max. power consumption	175 W	200 W
Power supply	100 – 240 V, 50 – 60 Hz	100 – 240 V, 50 – 60 Hz
Optical confocal infrared detector		Contact-free recognition of fill level, inserted tools, labware, tip types and quantities
SLAS/ANSI positions	2	4
Volume range	0.5 µL – 1 mL	0.2 µL – 1 mL
Gripper option	no	no
Thermal module		
Thermal module available?	no	no
Cooling rate	–	–
Heating rate	–	–
ThermoMixer upgrade option	–	no
Eppendorf ThermoMixer®		
Speed	–	–
Temperature range	–	–
Vacuum separation option	–	no
Automatic tool exchange	–	2 tools
UV/clean air option	–	no

Get all information about the Eppendorf automation portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/automation-portfolio





epMotion® 5073l / epMotion® 5073t	epMotion® 5075l / epMotion® 5075t / epMotion® 5075v / epMotion® 5075vt
10	**11**
68 × 62 × 81 cm / 27 × 25 × 32 in	108 × 62 × 81 cm / 43 × 25 × 32 in /
86 kg / 190 lb/ 93 kg / 205 lb	122 kg / 269 lb/1 24 kg / 273 lb / 123 kg / 271 lb/ 128 kg / 282 lb
400 W	700 W
100 – 240 V, 50 – 60 Hz	100 – 240 V, 50 – 60 Hz /
Contact-free recognition of fill level, inserted tools, labware, tip types and quantities	Contact-free recognition of fill level, inserted tools, labware, tip types and quantities
6	15 / 14.5 / 12 / 12
0.2 µL – 1 mL	0.2 µL – 1 mL
yes	yes/yes / included/included
max. 1/no	max. 3/max. 2 / max. 3/max. 2
4 °C/min/–	4 °C/min
9 °C/min/–	9 °C/min
no/included	yes/included / yes/included
–/ 300 – 2,000 rpm	–/ 300 – 2,000 rpm / –/ 300 – 2,000 rpm
–/ 15 °C below RT to 95 °C	–/ 15 °C below RT to 95 °C / –/ 15 °C below RT to 95 °C
no	yes/yes / included/included
3 tools and gripper	4 tools and gripper
yes	yes

epServices
for premium performance

You will find detailed information on services for these products in the “Service Products” chapter.

epMotion 5075t NGS Solution

The epMotion 5075t NGS Solution includes all dispensing tools, accessories, and consumables needed for NGS library preparation of up to 96 samples. It automates the process, providing reproducible and precise results while increasing lab productivity. With a wide range of kit flexibility, it's ideal for medium- to high-throughput and complex NGS workflows, eliminating the need for labor-intensive manual handling.

Easily operate liquid handling tasks via the MultiCon Desktop PC. The intuitive software interface allows for fast and flexible method implementation and an integrated Eppendorf ThermoMixer® allows for upstream nucleic acid purification. Save valuable time for other laboratory tasks and data analysis.



Product features

> Includes integrated Eppendorf ThermoMixer®, thermal module and all the tools, accessories and consumables needed for NGS library preparation
> 14.5 SLAS/ANSI deck positions and automatic tool exchange for 4 tools and gripper
> Volume range from 0.2 to 1,000 µL (depending on dispensing tools used)

Applications

> DNA and RNA purification
> NGS library preparation (medium to high sample numbers)
> Solid phase extraction
> PCR/qPCR set-up
> Tube to plate transfer
> Plate reformatting
> Serial dilutions
> Cherry picking and normalization
> Sample and reagent transfers
> Sample mixing and tempering



Unleash Your Potential!

www.eppendorf.link/unleash-your-potential

Handling beads in NGS.

www.eppendorf.link/stay-informed-beads

The ordering information for this product can be found on the page 11

epMotion® 96 Flex



Meet your lab's new team member – the epMotion® 96 Flex, a smart 96-channel liquid handling device that redefines efficiency and precision in pipetting. Designed with intelligent features, this system streamlines your workflow, adapts to varying needs, and ensures user-friendly interactions.

Product features

> Designed for simultaneous 96-channel pipetting for convenient processing of both 96-well and 384-well plates.
> Exchangeable dispensing head design covers a wide range of volumes and can accommodate less than 96 tips for maximized flexibility.
> Innovative user interface at the base of the device allows ergonomic use of the epMotion® 96 Flex in biosafety cabinets.

Applications

> Filling, replicating and reformatting of 96- and 384-well plates
> Reagent and compound addition
> (q)PCR setup in plate format
> DNA/RNA extraction
> Clean-up steps (e.g. for NGS)
> Cell-based assays
> Homogenous cell seeding (e.g. for cell-based assays)
> Plate coating and washing (e.g. for ELISA)



Flex Up Your Team!

www.eppendorf.link/flex-up-your-team

Ordering information

Description	Order no.
epMotion® 96 Flex base device, 96-channel, semi-automated electronic pipette, needs dispensing head for operation, 100 – 240 V/50 – 60 Hz, 0.5 – 1,000 µL	5069000519
Dispensing head 96-channel 0.5 – 300 µL, 96-channel, for epMotion® 96 Flex in hard shell case, needs base device for operation, 0.5 – 300 µL	5069000527
Dispensing head 96-channel 5 – 1,000 µL, 96-channel, for epMotion® 96 Flex in hard shell case, needs base device for operation, 5 – 1,000 µL	5069000535
TipHolder for epMotion® 96 Flex, Additional TipHolder to be used with epMotion® 96 Flex	5069075004
O-ring black, for epMotion® 96 and 96xl, package contains 100 pcs of O-rings	5069867504

Technical specifications subject to change.

epMotion® 5070



epMotion 5070 family overview:

epMotion® 5070
The epMotion 5070 is our most compact solution for accurate and reproducible automated pipetting. With four worktable positions and a small footprint the epMotion 5070 is a perfect match for routine application such as serial dilutions, reagent distribution, sample transfer from tubes to plates, and sample normalization.

epMotion® 5070 PCR Solution
The epMotion 5070 PCR Solution is a complete automation solution for your PCR and qPCR setup, designed to fit into minimal space. It features automated liquid handling and software with advanced features, as well as all the necessary accessories to streamline your PCR workflows.

Product features
> 4-position worktable
> Volume range from 0.2 to 1,000 µL (depending on dispensing tools used)
> Automatic tool exchange for 2 tools

epMotion 5070 for PCR

www.eppendorf.link/increase-flexibility

Applications
> PCR/qPCR set-up
> Tube to plate transfer
> Plate reformatting
> Serial dilutions
> Cherry picking and normalization
> Sample and reagent transfers

Ordering information

Description	Order no.
epMotion® 5070 MultiCon, completely contained housing, system incl. MultiCon, epBlue software, keyboard, mouse, waste box, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5070000282
epMotion® 5070 MultiCon PCR Solution, includes MultiCon PC, dispensing tool (TS 50), PCR specific accessories, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5070000948

epMotion® 5073



epMotion 5073 family overview:

epMotion® 5073l
Why spend valuable time on challenging liquid handling procedures when you can achieve fast, accurate and reproducible results with the epMotion 5073l automated liquid handler? Perfect for medium-throughput setup for PCR and qPCR, DNA/RNA normalization, cherry picking, dilution series and reformatting, the epMotion 5073l helps you perform pipetting tasks with ease and greater efficiency.

epMotion® 5073t
The epMotion 5073t automated liquid handling system allows you to perform fast and efficient NGS library preparation of 1 to 24 samples. It is also suitable for automating more complex, time-consuming liquid handling tasks such as DNA/RNA extraction. Save time and improve the reproducibility of your results with the epMotion 5073t! Also available as **epMotion® 5073t NGS Solution** including all the accessories and high-quality consumables needed for reliable low-to-medium-throughput NGS library preparation.

Product features
> 6-position worktable
> Volume range from 0.2 to 1,000 µL (depending on dispensing tools used)
> Automatic tool exchange for 3 tools

Applications
> DNA and RNA purification
> NGS library preparation (small sample numbers)
> PCR/qPCR setup
> Tube to plate transfer
> Plate reformatting
> Serial dilutions
> Cherry picking and normalization
> Sample and reagent transfers
> Sample mixing and tempering

Ordering information

Description	Order no.
epMotion® 5073l, MultiCon PC, completely contained housing, epBlue software, keyboard, mouse, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5073000110
epMotion® 5073t, MultiCon PC, completely contained housing, ThermoMixer, epBlue software, keyboard, mouse, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5073000111
epMotion® 5073t NGS Solution, MultiCon PC, completely contained housing, ThermoMixer, 3 dispensing tools, gripper, NGS specific accessories and consumables, epBlue software with Enhanced Feature Set 1, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5073000112

epMotion® 5075



Product features
> Up to 15 worktable positions
> Volume range from 0.2 to 1,000 µL (depending on dispensing tools used)
> Automatic tool exchange for 4 tools

Applications
> DNA and RNA purification
> NGS library preparation (medium to high sample numbers)
> Solid phase extraction
> PCR/qPCR set-up
> Tube to plate transfer
> Plate reformatting
> Serial dilutions
> Cherry picking and normalization
> Sample and reagent transfers
> Sample mixing and tempering

epMotion 5075 family overview:

epMotion® 5075l
Don't stress yourself by doing complex pipetting tasks when you can perform fast, accurate and reproducible PCR plate setup with the epMotion 5075l automated liquid handler. The epMotion 5075l offers 15 worktable positions and is well suited for high-throughput preparation of plates, PCR or qPCR setup, DNA/RNA normalization, cherry picking, dilution series, reformatting, and immunoassays. Say goodbye to tedious pipetting steps!

epMotion® 5075t
The epMotion 5075t automated liquid handling system allows you to perform high-throughput NGS library preparation with magnetic beads with speed and efficiency. It is also ideal for automating more complex, time-consuming liquid handling tasks such as DNA/RNA extraction and ELISA. Save time and improve the reproducibility of your results with the epMotion 5075t!
Also available as **epMotion® 5075t NGS Solution** including all the accessories and high-quality consumables needed for reliable medium-to-high-throughput NGS library preparation.

epMotion® 5075v
With integrated vacuum filtration, the epMotion 5075v allows true walk-away automation of filter-based purification or extraction protocols. Increase your lab productivity and free up time for other tasks!

epMotion® 5075vt
With integrated vacuum filtration and a combined mixing and temperature control module in one system, the epMotion 5075vt allows true walk-away automation of both filter- and bead-based, purification or extraction protocols. Do not let complex purifications and extractions tie you to your workbench!

Ordering information

Description	Order no.
epMotion® 5075l, MultiCon PC, completely contained housing, epBlue software, keyboard, mouse, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5075000041
epMotion® 5075t, MultiCon PC, completely contained housing, ThermoMixer, epBlue software, keyboard, mouse, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5075000042
epMotion® 5075t NGS Solution, MultiCon PC, completely contained housing, ThermoMixer, thermal module, 4 dispensing tools, gripper, NGS specific accessories and consumables, epBlue software with Enhanced Feature Set 1, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5075000045
epMotion® 5075v, MultiCon PC, completely contained housing, vacuum system with accessories, gripper, epBlue software, keyboard, mouse, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5075000043
epMotion® 5075vt, MultiCon PC, completely contained housing, vacuum system with accessories, gripper, ThermoMixer, epBlue software, keyboard, mouse, system for solid and liquid waste, 100 – 240 V/50 – 60 Hz, 0.2 µL – 1 mL, (depending on dispensing tools)	5075000044

epT.I.P.S.® Motion as Reload System



Description
Eppendorf Totally Integrated Pipetting System for Automation
The epT.I.P.S. Motion have been developed to work in perfect combination with our epMotion platform. In combination with a TipHolder accessory the Reload trays offer a more environmentally friendly option.

Ordering information

Description	Order no.
epT.I.P.S.® Motion as Reload System, without filter	
Eppendorf Quality, 10 µL, 2,304 tips (24 trays × 96 tips)	0030014545
Eppendorf Quality, 50 µL, 2,304 tips (24 trays × 96 tips)	0030014421
Eppendorf Quality, 300 µL, 2,304 tips (24 trays × 96 tips)	0030014464
Eppendorf Quality, 1,000 µL, 2,304 tips (24 trays × 96 tips)	0030014502
epT.I.P.S.® Motion as Reload System, with filter	
PCR clean, 10 µL, 2,304 tips (24 trays × 96 tips)	0030014553
PCR clean, 50 µL, 2,304 tips (24 trays × 96 tips)	0030014430
PCR clean, 300 µL, 2,304 tips (24 trays × 96 tips)	0030014472
PCR clean, 1,000 µL, 2,304 tips (24 trays × 96 tips)	0030014510
PCR clean and sterile, 10 µL, 2,304 tips (24 trays × 96 tips)	0030014561
PCR clean and sterile, 50 µL, 2,304 tips (24 trays × 96 tips)	0030014529
PCR clean and sterile, 300 µL, 2,304 tips (24 trays × 96 tips)	0030014537
PCR clean and sterile, 1,000 µL, 2,304 tips (24 trays × 96 tips)	0030014570
TipHolder, for epT.I.P.S.® Motion Reloads	5075751399
Clip for epT.I.P.S.® Motion Reloads	5075751070
Box for epT.I.P.S.® Motion 1,000 µL Reload	0030014677
Box for epT.I.P.S.® Motion 10/50/300 µL Reload	0030014669

epT.I.P.S.® Motion Pipette Tips



Description
Eppendorf Totally Integrated Pipetting System for Automation
For routine pipetting with excellent precision it is important to have a perfect system of tips and automate. The epT.I.P.S. Motion have been developed to work in perfect combination with our epMotion platform.

Ordering information

Description	Order no.
epT.I.P.S.® Motion Pipette Tips, without filter	
sterile, 10 µL, 960 tips (10 racks × 96 tips)	0030015185
sterile, 50 µL, 960 tips (10 racks × 96 tips)	0030015207
sterile, 300 µL, 960 tips (10 racks × 96 tips)	0030015223
sterile, 1,000 µL, 960 tips (10 racks × 96 tips)	0030015240
Eppendorf Quality, 10 µL, 960 tips (10 racks × 96 tips)	0030014383
Eppendorf Quality, 50 µL, 960 tips (10 racks × 96 tips)	0030014405
Eppendorf Quality, 300 µL, 960 tips (10 racks × 96 tips)	0030014448
Eppendorf Quality, 1,000 µL, 960 tips (10 racks × 96 tips)	0030014480
epT.I.P.S.® Motion Pipette Tips, with filter	
PCR clean and sterile, 10 µL, 960 tips (10 racks × 96 tips)	0030015193
PCR clean and sterile, 50 µL, 960 tips (10 racks × 96 tips)	0030015215
PCR clean and sterile, 300 µL, 960 tips (10 racks × 96 tips)	0030015231
PCR clean and sterile, 1,000 µL, 960 tips (10 racks × 96 tips)	0030015258
PCR clean, 10 µL, 960 tips (10 racks × 96 tips)	0030014391
PCR clean, 50 µL, 960 tips (10 racks × 96 tips)	0030014413
PCR clean, 300 µL, 960 tips (10 racks × 96 tips)	0030014456
PCR clean, 1,000 µL, 960 tips (10 racks × 96 tips)	0030014499
epT.I.P.S.® Motion as SafeRack tips, without filter	
Eppendorf Quality, 50 µL, 960 tips (10 racks × 96 tips)	0030014600
Eppendorf Quality, 300 µL, 960 tips (10 racks × 96 tips)	0030014626
Eppendorf Quality, 1,000 µL, 960 tips (10 racks × 96 tips)	0030014642
epT.I.P.S.® Motion as SafeRack tips, with filter	
PCR clean, 50 µL, 960 tips (10 racks × 96 tips)	0030014618
PCR clean, 300 µL, 960 tips (10 racks × 96 tips)	0030014634
PCR clean, 1,000 µL, 960 tips (10 racks × 96 tips)	0030014650

Dispensing Tools



Description
The dispensing tools for the epMotion liquid handling workstations are precision instruments for pipetting and dispensing of a variety of different liquids. They are available as single channel as well as multichannel tools, and they cover the volume range between 0.2 and 1,000 µL.

Product features
> High accuracy from 200 nL to 1,000 µL
> For various types of liquids
> 1- and 8-channel dispensing tools

Ordering information

Description	Order no.
Holder for 6 dispensing tools	5075774003
Gripper, incl. holder, for transporting plates on the worktable and automatic operation of the vacuum manifold, additionally order Gripper Tower 5075751895 for 5073 with SN > 6000	5282000018
TS 10 single channel dispensing tool, 1-channel, 0.2 – 10 µL	5280000100
TS 50 single-channel dispensing tool, 1-channel, 1.0 – 50 µL	5280000010
TS 300 single-channel dispensing tool, 1-channel, 20 – 300 µL	5280000037
TS 1000 single-channel dispensing tool, 1-channel, 40 – 1,000 µL	5280000053
TM 10-8 eight-channel dispensing tool, 8-channel, 0.2 – 10 µL	5280000304
TM 50-8 eight-channel dispensing tool, 8-channel, 1.0 – 50 µL	5280000215
TM 300-8 eight-channel dispensing tool, 8-channel, 20 – 300 µL	5280000231
TM 1000-8 eight-channel dispensing tool, 8-channel, 40 – 1,000 µL	5280000258
Holder for gripper	5075759004

Pipetting performance specifications measured based on ISO 8655-6

Single-channel tool	Volume range	Volume	Rel. systematic error	Rel. random error
TS 10	0.2 – 10 µL	0.2 µL	±25 %	±19.8 %
		1 µL	±5 %	±3 %
		5 µL	±2.4 %	±0.5 %
		10 µL	±1.2 %	±0.25 %
TS 50	1.0 – 50 µL	1 µL	±15 %	±5.0 %
		5 µL	±5.0 %	±3.0 %
		25 µL	±1.5 %	±0.6 %
		50 µL	±1.0 %	±0.4 %
TS 300	20 – 300 µL	20 µL	±4.0 %	±2.5 %
		30 µL	±3.0 %	±1.5 %
		150 µL	±1.0 %	±0.4 %
		300 µL	±0.6 %	±0.3 %
TS 1000	40 – 1,000 µL	40 µL	±5.0 %	±1.5 %
		100 µL	±2.0 %	±1.0 %
		500 µL	±1.0 %	±0.2 %
		1,000 µL	±0.7 %	±0.15 %

For more information on pipetting performance, please read the application notes

For the 50, 300 and 1000 µL tools

www.eppendorf.link/epMotion-Artel

For the 10 µL tools

www.eppendorf.link/epMotion-Artel-10ul

Device Hardware Upgrades

Ordering information


Description	Order no.
Thermal Module Upgrade Set , retrofitting of one thermal module for heating and cooling (0 – 110 °C) of thermoadapters, thermoblocks and thermoracks	5075757508
CleanCap Upgrade Set for epMotion® 5075, includes UV lamp and air filter system for decontamination and pipetting under clean air conditions, for upgrading epMotion 5075 with SN>10,000 and epBlue version >50.0	5075001888
Device Hardware Upgrades and Software, Upgrade set to MultiCon, changes existing epMotion EasyCon to PC controller. Includes PC, keyboard, mouse, epBlue SW, PCR & Prep assistant, cables	5075000725
CleanCap Upgrade Set for epMotion® 5073, includes UV lamp and air filter system for decontamination and pipetting under clean air conditions, for upgrading epMotion 5073 with SN>7000 and epBlue version >40.7	5073001333

These products require a service visit for installation

Power Supply Cables

Ordering information

Description	Order no.
Mains/power cord	
230 V/50 Hz (EU)	0013563934
230 V/50 Hz (GB/Hong-Kong)	0013594490
230 V/50 Hz (AR)	0013613973
230 V/50 Hz (CN)	0013613952
230 V/50 Hz (AU)	0013592454
120 V/50 Hz (US)	0013563942

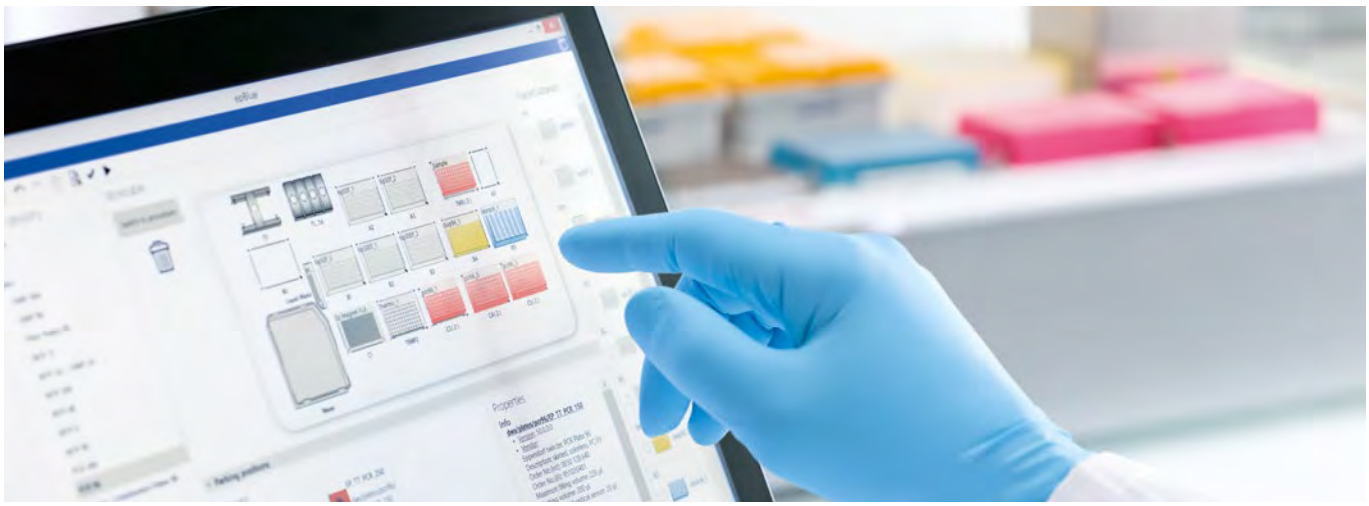

Software

epBlue control

epBlue epMotion® PC software
> Graphical user interface
> Main menu with direct access to the most important functions
> 3D view of workstation and run simulation

epBlue tracking

epBlue ID software
> Visual tracking of the scan procedure
> Automatic checking of the worktable
> Scanning of individual reaction vessels and microplates

New

epBlue LogFile Certificate Signature Revision Audit compliance

epBlue GxP software
> Complete electronic documentation
> Access control and user level management
> Audit trail and log file

www.eppendorf.link/epBlue

Ordering information

Description	Order no.
epBlue ID barcode and tracking software incl. manual barcode scanner, modular expansion of epBlue for barcode support. Incl. manual barcode reader with stand. Compatible with epBlue version 40.1 and higher	5075002701
New **Enhanced Feature Set GxP**, licence for epBlue feature: GxP, for support of regulated environments (e.g. according to GLP, GMP, 21 CFR Part 11), requires service visit and epBlue 40.9 or higher	5075002744
Enhanced Feature Set 1, license for epBlue additional features: Calculated no. of samples; Automatic tool selection; Start at command; Email notification, requires service visit and epBlue >40.6	5075000964
Enhanced Feature Set 2, license for epBlue feature: Normalization, requires Service visit and epBlue 40.8 or higher	5075000981

epMotion® ReservoirRacks and Modules



Description


The Eppendorf Reservoirs are the perfect vessels for a 10 to 400 mL liquid range, and permit the use of single channel and multichannel dispensing tools. The tapered shape of the reservoirs allows utilization of the entire liquid volume with minimal residue. Moreover, the reservoirs may be temperature-controlled inside the racks to allow cooling or warming of liquids.

Our Reservoir Racks hold reaction vessels of different sizes, and allow tempering in order to protect valuable samples or carry out reactions directly inside the Reservoir Rack.

Ordering information

Description	Order no.
ReservoirRack, for presenting 10 mL, 30 mL and 100 mL reagent reservoirs. Up to 7 reservoirs or Reservoir Rack modules can be presented.	5075754002
Adapter sleeves, to retrofit the 1.5/2.0 mL thermoracks for use with 0.5 mL vessels, 25 pcs.	5075772000
Gripper Tower, enables positioning epT.I.P.S.® Motion Reload trays in the parking position of the gripper and holds the gripper when it is not in use; only for use with epMotion® 5073 as of serial number 6000	5075751895
Tip Tool, tool for exclusively transferring epT.I.P.S.® Motion from racks and trays to the ReservoirRack modules for tips, incl. wall mount for safe storage of the tool	5285000000
Reservoir Rack Module NGS, for use with epMotion® ReservoirRacks, for distributing samples and reagents for NGS-specific applications, space for 20 x ILMN tubes, 4 x Eppendorf Tubes® 5.0 mL, 4 x Eppendorf Tubes 1.5 mL	5075751917
Reservoir Rack Module PCR, for use with epMotion® ReservoirRacks, for distributing samples and reagents for PCR, space for 48 x PCR tubes 0.2 mL incl. 2 x strip adapters 0.2 mL, (alternatively, space sufficient for 16 index tubes and up to 32 x PCR tubes 0.2 mL), 12 x Eppendorf Tubes 1.5/2.0 mL, 1 x tube 5.0 mL	5075751933
Reservoir Rack Module Tips, for use with epMotion® ReservoirRacks, for providing up to 16 epT.I.P.S.® Motion per module and up to 7 modules per ReservoirRack (112 tips in total), set consisting of 7 modules	5075751950
TipHolder, for epT.I.P.S.® Motion Reloads	5075751399
TipHolder 73, enables positioning epT.I.P.S.® Motion Reload trays above a rack of epT.I.P.S.® Motion and thus doubles the tip capacity in an ANSI/SLAS position, reusable and autoclavable, epBlue 40.7 or higher required	5075751879
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 8 × PCR tubes 0.2 mL	5075799049
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 4 × Safe-Lock tubes 0.5/1.5/2.0 mL	5075799081
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 4 × Eppendorf Tubes® 5.0 mL	5075799340
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 4 × reaction vessels Ø 12 mm	5075799103
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 4 × reaction vessels Ø 16 mm	5075799120
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 4 × reaction vessels Ø 17 mm	5075799162
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 2 × reaction vessels Ø 29 mm	5075799189
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 1 × reservoir 10 mL	5075799421
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 1 × reservoir 30 mL	5075799146
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 1 × reservoir 100 mL	5075799260
epMotion® reservoir 10 mL, small-volume container for reagent presentation on the epMotion®, can only be inserted with the Reservoir Rack; production batch testing, certified, 10 mL, PCR clean, 10 × 5 reservoirs in the bag, polypropylene (PP)	0030126521
epMotion® reservoir 30 mL, large-volume container for reagent presentation on the epMotion®, can only be inserted with the Reservoir Rack; production batch testing, certified, 30 mL, PCR clean, 10 × 5 reservoirs in the bag, polypropylene (PP)	0030126505
epMotion® reservoir 100 mL, large-volume container for reagent presentation on the epMotion®, can only be inserted with the Reservoir Rack; production batch testing, certified, 100 mL, PCR clean, 10 × 5 reservoirs in the bag, polypropylene (PP)	0030126513
epMotion® reservoir 400 mL, large-volume container for reagent presentation on the epMotion®, 10 reservoirs, 400 mL each, autoclavable, polypropylene (PP)	5075751364
epMotion® reservoir 195 mL, low dead volume reservoir, single well with 96 cavities, PCR clean, 4 × 5 reservoirs, 195 mL, polypropylene (PP)	0030126556

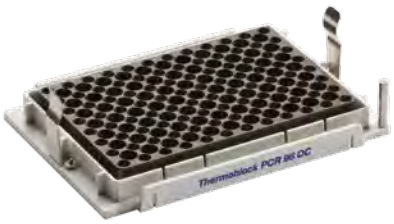epMotion® Thermoracks and Plate Accessories



Description

The Thermoracks, Thermoblocks and Thermoadapters comprise versatile options for the cooling or warming of reaction vessels and plates of different formats. The gripper for plates and racks allows automated transport and stacking on the deck. A 96 well magnet adapter for applications using magnetic beads is also available, and it enables fully automated extraction and purification protocols and/or NGS library preparation using a diverse range of kits.

Ordering information

Description	Order no.
Thermorack CB, for holding up to 384 x 0.1 mL strip tubes in the Corbett Research Rotor-Gene 3000	5075767031
Eppendorf Magnum FLX® Magnet Adapter, universal ring magnet plate for rapid magnetic bead separation. Supports most 96-well plates (standard, PCR, deepwell)	5075751836
Thermorack Rotor/Tubes, for temperature controlled pipetting of Qiagen® Rotor-Disc® 72/100 and 20 tubes 1.5/2.0 mL	5075751526
Thermoblock PCR 96 OC, for temperature control and safe piercing of sealed, semi-skirted PCR plates with orientation control	5075751666
Thermoadapter for PCR, for temperature control of PCR plates, 96 wells, skirted	5075787008
Thermoadapter for PCR, for temperature control of PCR plates, 384 wells, skirted	5075788004
Thermoadapter Frosty, combination of height adapter and PCR-Cooler, for cooling skirted PCR plates	5075789000
Thermoblock DWP 2000, for 2 mL Eppendorf Deepwell Plates 96/2000	5075751330
Thermoadapter DWP 96, for Deepwell Plates 96/1000	5075751054
Thermoadapter LC Sample, for MagNA Pure LC sample cartridge	5075751305
Thermorack, for 24 Safe-Lock tubes, temperable, 0.5/1.5/2.0 mL	5075769000
Thermorack, for 24 Safe-Lock tubes, temperable, 1.5/2.0 mL	5075771004
Thermorack TMX, for 24 Safe-Lock micro test tubes, 0.5 mL/1.5 mL/2.0 mL	5075751160
Thermorack TMX, for 24 Safe-Lock tubes, temperable, 1.5/2.0 mL	5075751186
Thermorack, for 24 Cryo tubes	5075777055
Thermoblock for PCR, for temperature control of 96 vessels 0.2 mL or one PCR plate 96 wells	5075766000
Thermoblock for PCR, for temperature control of PCR plate 384 wells	5075767007
Thermoadapter for Microplate 96/V/U, for holding and temperature control of Eppendorf Microplates with V or U bottom	5075751577

epMotion® Tube Racks, Adapters and Vacuum Modules



Description
Tube racks are specially designed for the respective dimensions of the reaction vessels, and they thus provide optimal support for plastic as well as glass vessels.

Ordering information

Description	Order no.
PrepRack for 24 Eppendorf Safe-Lock Tubes 2 mL, for nucleic acid preparation	5073751006
Rack for single test tubes, for presenting Eppendorf reaction vessels, glass or plastic tubes, not temperable	
Ø 17 mm × 100 mm max. length	5075761009
Ø 17 mm × 60 mm max. length	5075775000
Ø 16 mm × 100 mm max. length	5075760002
Ø 16 mm × 60 mm max. length	5075776006
Ø 15 mm × 100 mm max. length	5075792028
Ø 15 mm × 60 mm max. length	5075792044
Ø 14 mm × 100 mm max. length	5075792001
Ø 14 mm × 60 mm max. length	5075792060
Ø 13 mm × 100 mm max. length	5075762005
Ø 13 mm × 60 mm max. length	5075792087
Ø 12 mm × 100 mm max. length	5075763001
Ø 12 mm × 60 mm max. length	5075792109
Rack, for 24 HPLC tubes, Ø 12 mm × 40 mm max. length	5075792125
Rack, for 96 screw cap tubes, 1.5/2.0 mL	5075791005
Rack for 24 tubes, for 24 Safe-Lock tubes, no tempering	
0.5/1.5/2.0 mL	5075751453
1.5/2.0 mL	5075751275
Vac holder, adapter for Vac Frame	5075778009
Vacuum lid, lid for vacuum unit	5075779005
Silicone mat for Vac Lid	5075793008
Vac Frame 1, 16 mm height, recommended for filter plates from 5Prime, Invitek	5075784009
Vac Frame 2, 26 mm height, recommended for filter plates from MACHEREY NAGEL®, Promega® or Qiagen®	5075785005
Anticontamination plate adapter, for vacuum processes with foaming solutions in multiwell plates, set of 10	5075794004
Vac Thermo lid	5075796007
Collection plate adapter MN, type for VAC station	5075785064
Elution plate adapter, for processing micro tubes in racks	5075785030
Rack Smart, for holding one tube rack of SmartCycler® reaction tubes	5075790009
Rack LC 20 µL/100 µL, for up to 96 × 20 µL or 100 µL LightCycler capillaries for use with Centrifuge 5804/5804 R or 5810/5810 R and other devices, set of 2	5075795000
Adapter for Covaris Rack 12 x 8 Strips, for E-series rack 12 place 8 microTUBEStrip V2 from Covaris PN 500444	5075751801
Rack ILMN tubes, Rack for single tubes, 40 × ø 8.4 mm and 12 × ø 11.2 mm, transportable, autoclavable	5075751747

epMotion® Waste Disposal Accessories



Description
During the pipetting of liquids, waste, both liquid and solid, is generated. Solid waste mainly consists of pipette tips and reaction vessels. In order to dispose both types of waste correctly, we offer variable options.

Ordering information

Description	Order no.
Liquid Waste System, consisting of splash protection, waste funnel, waste tub, tub lid. For use on epMotion® 5075 and epMotion® 5073 with serial no. > 10,000	5075799448
Waste bags bio-hazardous waste, for epMotion 5075 with serial no. > 10,000. Up to 10 L volume, ideal for disposing biologically hazardous waste, autoclavable, PP material, thickness 50 µm, transparent, 50 bags	5075752034
Waste bags, for epMotion 5075 with serial no. > 10,000. Up to 10 L volume, ideal for disposing non-biologically hazardous waste, autoclavable, PP material, thickness 50 µm, transparent, 50 bags	5075752050
Waste bags biohazard, for waste bag holder of epMotion® 5070/5073/5075 with SN < 10000 and epMotion® 5073 with SN > 10000. Up to 7 L capacity, ideal for disposing biohazardous waste, autoclavable, PP material, thickness 50 µm, transparent, 50 bags.	5075751763
Waste bags, for waste bag holder of epMotion® 5070/5073/5075 with SN < 10000 and epMotion® 5073 with SN > 10000. Up to 7 L capacity, ideal for disposing non-hazardous waste, autoclavable, PP material, thickness 50 µm, transparent, 50 bags.	5075751780

epMotion® Height Adapters



Description
Adjusting the height of vessels is necessary when optimizing protocols and workflows. Our various height adapters enable users to level lab ware on the worktable for faster sample processing.

Ordering information

Description	Order no.
epMotion® height adapter, for leveling labware, enables faster plate processing	
85 mm	5075751003
55 mm	5075752000
40 mm, for pipette tips	5075755009

Temperature Control and Mixing



Every lab needs to heat, cool, and mix samples. Nucleic acid or protein purification and analysis, cell and tissue research or expression profiling – all of these applications require a thermal mixer.

An accurate temperature might be the first thing that comes to your mind when thinking about a thermal mixer. For us, temperature accuracy is a must, and we test each SmartBlock separately after production to certify its performance.

The mixing performance is guaranteed by our proven 2D Mix-Control, ensuring even small volumes are mixed efficiently. If you are only looking for efficient mixing without temperature control, the MixMate® is your 3-in-1 choice – a Vortex, plate, and tube mixer all in one package.

Additionally, your thermal mixer must be reliable, robust, easy-to-handle, and versatile. We enhance your vessel flexibility with 15 different Eppendorf SmartBlock thermoblocks – from 0.1 mL tubes or plates up to 50 mL Eppendorf Conical Tubes. Each SmartBlock can be easily attached with only one hand to the Eppendorf ThermoMixer® C, or Eppendorf ThermoStat C, and is individually certified for temperature accuracy. If you need enhanced capacity and a second incubation temperature for 1.5 mL tubes, we offer the SmartExtender – perform your heat-shock transformation in one device.



Get all information about the Eppendorf mixer portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/mixer-portfolio

When working with cell lines, our Eppendorf SmartBlock cryo thaw offers a special program for smooth thawing of cell culture vials, and reagents: convenient, capable of handling multiple vials at once, reduced contamination, and reproducible.

Your samples can be protected from evaporation and condensation at the tube lid when using the ThermoTop®, which heats the sample from above. Your reaction happens where you want it – down in the tube.

Easy programming is a necessity. To increase your efficiency, each device has preprogrammed keys with the ideal parameters for efficient mixing of vessels, like a PCR plate, as well as preprogrammed temperature keys, like 37 °C or 95 °C.

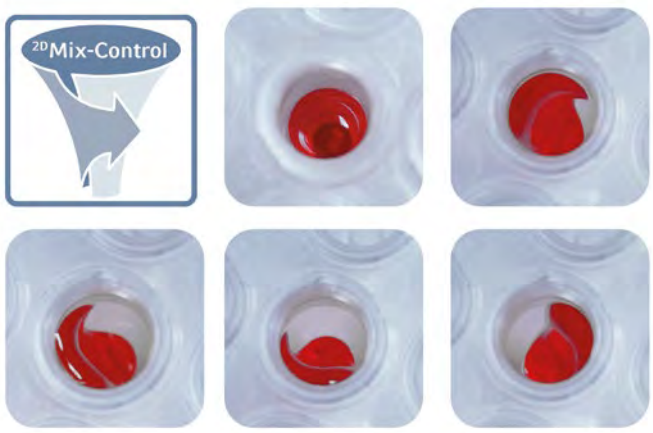
We care about you and your safety, so we designed all of our devices with an isolating layer on the block that protects you from burning your fingers. All surfaces are smooth without edges and easy to clean and disinfect.



Use the Eppendorf ThermoMixer® C for heating, cooling and mixing of your samples. Multiple Eppendorf SmartBlocks enlarge your vessel flexibility from 384-well plates to 50 mL tubes.

Versatility of ThermoMixer

www.eppendorf.link/mixer-versatility



The 2D Mix-Control ensures efficient mixing of even small volumes by a broad orbital movement.

Download the mixer brochure for detailed information
www.eppendorf.link/mixer-brochure

Our Portfolio – Your Choice







Model	Eppendorf ThermoMixer® C	Eppendorf ThermoStat C	Eppendorf ThermoMixer® F0.5
Page(s)	**6**	**7**	**8**
Timer	5 sec to 99:30 h, continuous	5 s to 99:30 h, continuous	–
Mixing and vortexing radius	1.5 mm	–	1.5 mm
Mixing orbit	3 mm	–	3 mm
Mixing frequency	300 – 3,000 rpm[1)]	–	300 – 2,000 rpm
Max. speed	3,000 rpm[1)]	–	2,000 rpm
Temperature settings	1 °C / 100 °C	-10 °C/110 °C (110 °C when using the SmartBlocks 12 mm or cryo)	1 °C / 100 °C
Temperature range	Min: 15 °C[1)] below RT, max: 100 °C	Min: 30 °C[1)] below RT, max: 110 °C (110 °C when using the 12 mm and cryo SmartBlocks)	Min: 4 °C above RT, max: 100 °C
Temperature accuracy	Max. ±0.5 °C at 20 – 45 °C	Max. ±0.5 °C at 20 – 45 °C[1)]	Max. ±0.5 °C at 20 – 45 °C
Interfaces	USB interface	USB interface	USB interface
Dimensions (W × D × H)	20.6 × 30.4 × 13.6 cm / 8.1 × 12.0 × 5.4 in	20.6 × 30.4 × 13.6 cm / 8.1 × 11.9 × 5.3 in	20.6 × 30.4 × 16.3 cm / 8.1 × 1.9 × 6.4 in
Weight w/o accessories	6.3 kg / 13.9 lb	4.3 kg / 9.7 lb	6.2 kg / 13.6 lb
Power supply	100 – 130 V/220 – 240 V, 50 – 60 Hz	100 – 130 V/220 – 240 V, 50 – 60 Hz	100 – 130 V/220 – 240 V, 50 – 60 Hz
Max. power consumption	200 W	200 W	200 W
Application	> Heating > Cooling > Mixing > all SmartBlocks can be adapted	> Heating > Cooling > all SmartBlocks can be adapted	> Heating > Mixing > only suitable for 0.5 mL tubes

[1)] depending on SmartBlock used

Get all information about the Eppendorf mixer portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/mixer-portfolio









Eppendorf ThermoMixer® F1.5	Eppendorf ThermoMixer® F2.0	Eppendorf ThermoMixer® FP	MixMate®
8	**8**	**8**	**9**
–	–	–	15 s – 99.3 h, continuous
1.5 mm	1.5 mm	1.5 mm	1.5 mm
3 mm	3 mm	3 mm	3 mm
300 – 1,500 rpm	300 – 1,500 rpm	300 – 2,000 rpm	300 – 3,000 rpm
1,500 rpm	1,500 rpm	2,000 rpm	3,000 rpm
1 °C / 100 °C	1 °C / 100 °C	1 °C / 100 °C	–
Min: 4 °C above RT, max: 100 °C	Min: 4 °C above RT, max: 100 °C	Min: 4 °C above RT, max: 100 °C	–
Max. ±0.5 °C at 20 – 45 °C	Max. ±0.5 °C at 20 – 45 °C	Max. ±0.5 °C at 20 – 45 °C	–
USB interface	USB interface	USB interface	–
20.6 × 30.4 × 17.0 cm / 8.1 × 11.9 × 6.7 in	20.6 × 30.4 × 17.0 cm / 8.1 × 11.9 × 6.7 in	20.6 × 30.4 × 16.4 cm / 8.1 × 11.9 × 6.4 in	17.0 × 23.0 × 13.0 cm / 6.7 × 9.1 × 5.1 in
6.3 kg / 13.9 lb	6.3 kg / 13.9 lb	6.1 kg / 13.4 lb	4.2 kg / 9.2 lb
100 – 130 V/220 – 240 V, 50 – 60 Hz	100 – 130 V/220 – 240 V, 50 – 60 Hz	100 – 130 V/220 – 240 V, 50 – 60 Hz	110 – 120 V/220 – 240 V, 50 – 60 Hz
200 W	200 W	200 W	40 W
> Heating > Mixing > only suitable for 1.5 mL tubes	> Heating > Mixing > only suitable for 2 mL tubes	> Heating > Mixing > only suitable for plates	> Mixing > Vortexing

epServices
for premium performance

You will find detailed information on services for these products in the “Service Products” chapter.

Eppendorf ThermoMixer® C



More about ThermoMixer C

www.eppendorf.link/ThermomixerC

Description

Eppendorf ThermoMixer C is for heating, cooling, and mixing almost any of your lab vessels. Efficient mixing of your samples is executed by [2D]Mix technology.

Product features

> Mixing, heating, and cooling in one instrument for high flexibility
> All common vessels and plate formats from 5 µL to 50 mL by different Eppendorf SmartBlocks for standard applications
> Ideal for cell thawing when using Eppendorf SmartBlock cryo thaw

	Plate type	96-well plates	384-well plates
Mixing of different buffers			
Buffer with detergent	PCR	30 s 1,800 rpm	30 s 2,800 rpm
Buffer without detergent	PCR	1 min 2,000 rpm	30 s 3,000 rpm
Buffer with high salt concentration	DWP	5 s 1,400 rpm	30 s 2,000 rpm
Buffer with DMSO	MTP	5 s 1,100 rpm	5 s 2,000 rpm
Mixing of viscous solutions			
Genomic-DNA	PCR	30 s 2,000 rpm	1 min 3,000 rpm
Resuspension of pellets			
Bacteria cell pellets	DWP	30 s 2,000 rpm	2 min 2,000 rpm

Eppendorf ThermoMixer C provides enough mixing power to handle challenging mixing tasks. Most samples are efficiently mixed within less than a minute independent of vessel geometry or sample properties. For more informations see AppNote 130.

Ordering information

Description	Order no.
Eppendorf ThermoMixer® C, basic device without thermoblock, 220 – 240 V/50 – 60 Hz (EU)	5382000015

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

50 µL sample mixing with 1,800 rpm

Competitor 1 min



Suboptimal sample mixing

Eppendorf [2D]Mix-Control 1 min (MixMate®)



Reliable sample mixing

Eppendorf [2D]Mix-Control 1 min (Eppendorf ThermoMixer®)



Reliable sample mixing

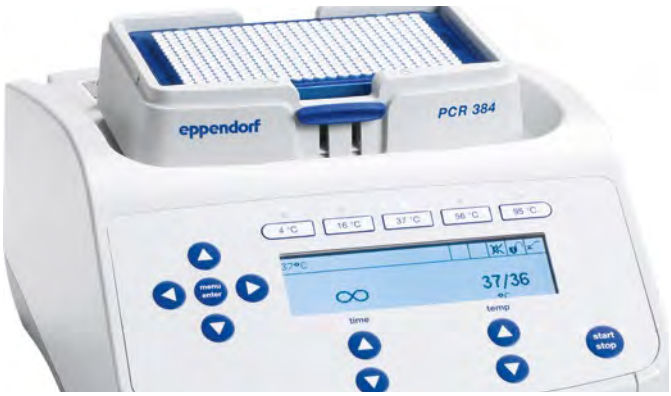
Eppendorf ThermoStat C



Get more information

www.eppendorf.link/ThermostatC





The ideal device to accurately set and maintain temperatures:
The Eppendorf ThermoStat C is for heating and cooling almost any of your lab vessels. For additional condensation prevention of small volumes we recommend the Eppendorf ThermoTop (optional), a heated lid with condens.protect technology.

Product features
> Heating and active cooling in all common vessel and plate formats from 5 µL to 50 mL for high flexibility
> Broad range of Eppendorf SmartBlocks enables high vessel flexibility
> Excellent temperature accuracy for safe sample handling

Ordering information

Description	Order no.
Eppendorf ThermoStat C, basic device without thermoblock, 220 – 240 V/50 – 60 Hz (EU)	5383000019
ThermoTop®, with **condens.***protect* technology	5308000003
SmartExtender, 1.5 mL	5322000008

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Eppendorf ThermoMixer® F



Product features

> Heating and mixing in 0.5/1.5/2.0 mL reaction vessels (F0.5/F1.5/F2.0) or plates (FP)
> Up to 1,500 rpm (F1.5/F2.0) or 2,000 rpm (F0.5/FP) for efficient sample mixing
> Outstanding ^{2D}Mix-Control technology results in excellent mixing performance

Check out more

www.eppendorf.link/ThermomixerF

Doing a lot of routine mixing and heating?

These products are the perfect choice for mixing and heating established routine applications. The Eppendorf ThermoMixer F0.5/F1.5/F2.0 and FP have a fixed block for 0.5/1.5/2.0 mL tubes and plates, respectively. Reliable prevention of condensate formation in small vessels can be achieved with the heated lid Eppendorf ThermoTop (optional).

Ordering information

Description	Order no.
Eppendorf ThermoMixer® FP, with thermoblock for Microplates and Deepwell Plates, including lid, 220 – 240 V/50 – 60 Hz (EU)	5385000016
Eppendorf ThermoMixer® F0.5, with thermoblock for 24 reaction vessels 0.5 mL, 200 – 240 V/50 – 60 Hz (EU)	5386000010
Eppendorf ThermoMixer® F1.5, with thermoblock for 24 reaction vessels 1.5 mL, 220 – 240 V/50 – 60 Hz (EU)	5384000012
Eppendorf ThermoMixer® F2.0, with thermoblock for 24 reaction vessels 2.0 mL, 220 – 240 V/50 – 60 Hz (EU)	5387000013

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

MixMate®



Straight mixing required? The 3-in-1 mixer for plates, tubes, and vortex mixing. This high speed instrument provides complete mixing of your samples in seconds. Remarkable [2D]Mix-Control enables optimized mixing with anti-spill technology.

Get more information

www.eppendorf.link/Mixmate

	Plate type	96-well plates	384-well plates
Mixing of different buffers			
Buffer with detergent	PCR	15 s 1,800 rpm	45 s 2,800 rpm
Buffer without detergent	PCR	30 s 2,100 rpm	30 s 3,000 rpm
Buffer with high salt concentration	DWP	5 s 1,400 rpm	1 min 2,000 rpm
Buffer with DMSO	MTP	5 s 1,100 rpm	5 s 2,200 rpm
Mixing of viscous solutions			
Genomic-DNA	PCR	30 s 2,000 rpm	45 s 3,000 rpm
Resuspension of pellets			
Bacteria cell pellets	DWP	30 s 2,000 rpm	3 min 2,000 rpm

MixMate provides enough mixing power to handle the most challenging mixing tasks. Most samples are efficiently mixed within less than a minute independent of vessel geometry or sample properties. For more information see AppNote 130.

Product features

> High-speed mixer (up to 3,000 rpm) for fast and efficient mixing of small volumes in all common vessel formats up to 50 mL
> [2D]Mix-Control technology (planar mixing orbit without vertical movement) for controlled mixing and reproducible results in seconds
> Anti-spill technology for controlled mixing movements without lid wetting and cross-contamination

Ordering information

Description	Order no.
MixMate®, basic device without tube holders, 230 V/50 – 60 Hz (EU)	5353000510
Tube Holder 0.5 mL, for 24 × 0.5 mL reaction vessels	5353040121
Tube Holder 1.5/2.0 mL, for 24 × 1.5 mL or 2.0 mL reaction vessels	5353040130
Tube Holder 5/15 mL, for 8 x 5/15 mL conical tubes	5353040148
Tube Holder 25/50 mL, for 4 x 25/50 mL conical tubes	5353040156
Tube Holder PCR 96, for 96 × 0.2 mL PCR tubes, PCR strips or 1 × 96-well PCR plate, semi-skirted or unskirted	5353040113

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

ThermoTop®

Having non-regular enzymatic results after temperature incubation?

The ThermoTop with condens.protect technology heated lid avoids condensation on tube lid and tube wall. It is compatible with Eppendorf ThermoMixer C/ Eppendorf ThermoStat C with SmartBlock plates and lab vessels up to 2 mL and Eppendorf ThermoMixer F 0.5/F1.5/F2.0/FP.



Product features

> Efficient and reliable of condensation prevention for safe sample heating
> Get stable reaction conditions for optimal enzymatic performance within your samples
> Wireless connection with automatic recognition and operation for user-friendly handling

Ordering information

Description	Order no.
ThermoTop®, with **condens**.*protect* technology	5308000003

SmartExtender

Do you need a second temperature or more space for incubation steps?

The Eppendorf SmartExtender offers a comfortable incubation tool which can easily be used as an add-on to your existing SmartBlocks and the Eppendorf ThermoMixer® C/F as well as Eppendorf ThermoStat C.



Product features

> Independent temperature set-up for parallel application
> Up to 12 × 1.5 mL vessels
> Temperature range from 3 °C above room temperature to 110 °C

Ordering information

Description	Order no.
SmartExtender, 1.5 mL	5322000008

IsoTherm-System®

The IsoTherm-System is the ideal system for safely cooling your samples in 1.5 mL/2.0 mL tube formats at -21°C or 0°C throughout your entire lab workflow.



Ordering information

Description	Order no.
IsoTherm-System® starter set, includes IsoSafe, IsoRack, 0 °C IsoPack and -21 °C IsoPack, for 1.5/2.0 mL tubes	3880001018
IsoPack and IsoRack set, includes one IsoPack and one IsoRack	
for 1.5/2.0 mL vessels, 0 °C	3880001166
for 1.5/2.0 mL vessels, -21 °C	3880001174

Eppendorf SmartBlock

Interchangeable in just seconds.
These individually sensor-controlled SmartBlocks are your solution for maintaining accurate, uniform temperatures. The flexible thermoblocks are compatible with common lab vessels to support a broad range of applications - for use with Eppendorf ThermoMixer® C (heating/ cooling and mixing) and Eppendorf ThermoStat C (heating/ cooling).



Product features
> Optimized block design supports optimal temperature transfer to your sample to achieve excellent results
> Eppendorf SmartBlock-specific calibration by integrated sensor technology maximizes temperature accuracy and homogeneity
> Every Eppendorf SmartBlock is individually inspected in production for temperature accuracy and includes a serial-number specific certificate for documentation purpose

SmartBlocks can only be used with ThermoMixer C and ThermoStat C

Eppendorf SmartBlocks for the following reaction vessels:
A. 24 lab vessels up to 12 mm in diameter
B. 8 × 15 mL conical tubes
C. 4 × 50 mL conical tubes
D. Eppendorf Deepwell Plates 96/500 µL
E. Eppendorf Deepwell Plates 96/1000 µL
F. 24 × cryo tubes
G. 8 × Eppendorf Tubes® 5.0 mL
H. Lid for Eppendorf SmartBlock plates, PCR 96, PCR 384, DWP, 0.5 mL, 1.5 mL and 2.0 mL
I. 384-well PCR plates
J. 96-well PCR plates
K. 24 × 0.5 mL vessels
L. 24 × 1.5 mL vessels
M. 24 × 2.0 mL vessels
N. MTPs and Deepwell Plates
O. 4 × 25 mL adapter for SmartBlock 50 mL

Get more details


www.eppendorf.link/Smartblock

Ordering information

Description	Order no.
Eppendorf SmartBlock cryo thaw, thermoblock for 24 cryo tubes, 1.5 mL – 2 mL, max. external diameter 12.7 mm, flat base. Replaces order no. 5367000025.	5318000001
Eppendorf SmartBlock 0.5 mL, thermoblock for 24 reaction vessels 0.5 mL, incl. Transfer Rack 0.5 mL	5361000031
Eppendorf SmartBlock 1.5 mL, thermoblock for 24 reaction vessels 1.5 mL, incl. Transfer Rack 1.5/2.0 mL	5360000038
Eppendorf SmartBlock 2.0 mL, thermoblock for 24 reaction vessels 2.0 mL, incl. Transfer Rack 1.5/2.0 mL	5362000035
Eppendorf SmartBlock 5 mL, thermoblock for 8 Eppendorf Tubes® 5.0 mL, 8 × 5.0 mL reaction vessels	5309000007
Eppendorf SmartBlock 15 mL, thermoblock for 8 conical tubes 15 mL	5366000021
Adapter 25 mL for Eppendorf SmartBlock 50 mL, Set consisting of 4 adapters and removal tool	5365000109
Eppendorf SmartBlock 50 mL, thermoblock for 4 conical tubes 50 mL	5365000028
Eppendorf SmartBlock 12 mm, thermoblock for 24 reaction vessels, diameter up to 12 mm, height 35 mm – 76 mm	5364000024
Eppendorf SmartBlock PCR 96, thermoblock for PCR plates 96, incl. lid	5306000006
Eppendorf SmartBlock PCR 384, thermoblock for PCR plates 384, incl. lid	5307000000
Eppendorf SmartBlock DWP 500, thermoblock for Eppendorf Deepwell Plates 96/500 µL, incl. lid	5316000004
Eppendorf SmartBlock DWP 1000, thermoblock for Eppendorf Deepwell Plate 96/1,000 µL, incl. lid	5310000002
Eppendorf SmartBlock plates, thermoblock for microplates and Deepwell Plates, incl. lid	5363000039
Lid, for Eppendorf ThermoMixer® F0.5/F1.5/F2.0 and FP, for Eppendorf SmartBlock 0.5 – 2.0 mL, plates, PCR 96, PCR 384, and DWP	5363000233
Transfer Rack 0.5 mL, for Eppendorf SmartBlock 0.5 mL	3880000305
Transfer Rack 1.5/2.0 mL, for Eppendorf SmartBlock 1.5 mL and Eppendorf SmartBlock 2.0 mL	3880000151

Tubes and Plates

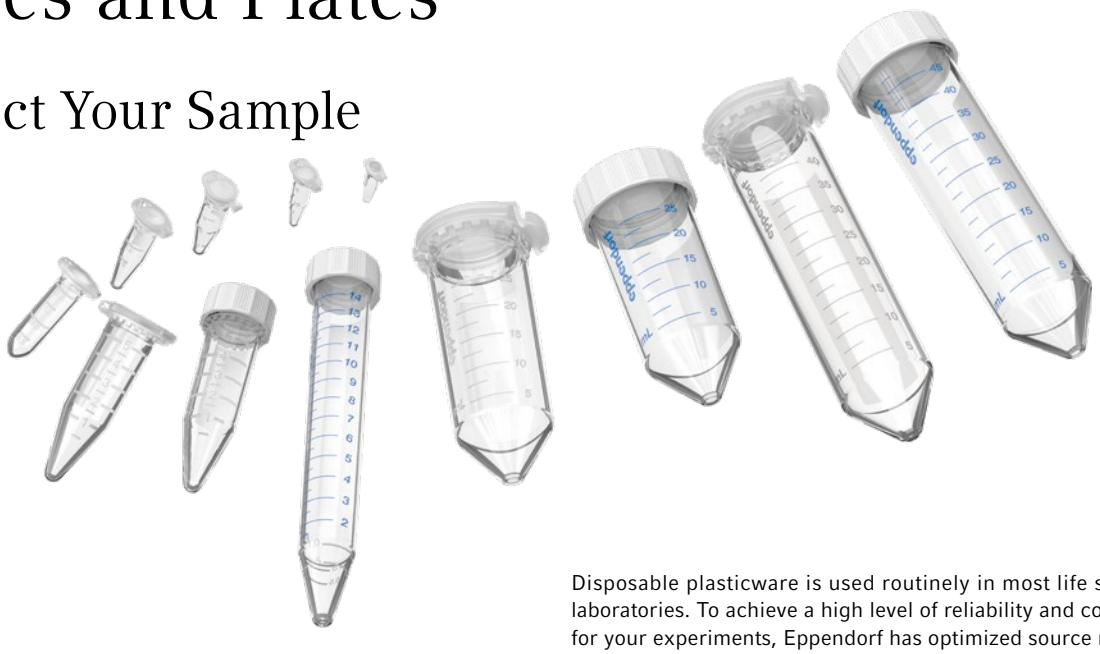Protect Your Sample



Eppendorf Tubes®

> Made of high quality, virgin polypropylene (PP), free of biocides, plasticizers and latex
> Produced with optimized, highly polished molds without the use of slip agents like oleamide, erucamide, stearamide
> Produced with dyes free of organic additives and heavy metals (applies for screw caps and Amber variants)
> Designed and manufactured under ISO 13485 and ISO 9001 certified Quality Management System
> Full traceability is provided for each product back to material lot
> Some tube variants are already available as BioBased; they are made from up to 100 % renewable ressources according to the mass-balance approach that calculates the amount of biobased starting material for polymer production, are ACT labeled and ISCC plus certified (more information at www.eppendorf.link/biobased).

Disposable plasticware is used routinely in most life science laboratories. To achieve a high level of reliability and consistency for your experiments, Eppendorf has optimized source materials and processes for the production of Eppendorf Tubes® to minimize the risk of interference. The effects from chemical substances such as slip agents, plasticizers or biocides leaching out of plastic consumables are still frequently underestimated in the majority of life science applications.

However, increasing scientific evidence shows that this heterogeneous group of chemicals may significantly affect experiments and pose a likely source of error in various assay systems. They slow down evaporation, skew absorbance readings and lead to erroneous DNA quantification. Some of these slip agents have also been shown to negatively affect the outcome of biological tests like enzyme activity or receptor-binding assays.



Effective light protection in amber tubes

Numerous types of light-sensitive reagents and samples are often used in the laboratory routine. Once exposed to light, their quality, longevity or activity may rapidly decrease and therefore adversely affect subsequent assays and experiments. To avoid these issues, light-sensitive reagents and samples must be handled and stored in a manner that protects them from direct light exposure. Amber-colored laboratory plastic tubes reduce light transmission, and thus allow safe storage and handling of light-sensitive samples.

Light protection meets transparency

While providing good sample protection against high-energy light in the short wavelength UV/VIS spectrum, amber tubes often come with a major drawback: They are opaque and therefore do not allow for a clear view of the sample. Designed specifically for eppendorf conical tubes from 5 mL to 50 mL, our amber material has an optimized degree of transparency to allow for full visibility of the sample, offering full control over pipette tip insertion depth and providing a clear advantage in sample handling and contamination prevention.

Get all information about the Eppendorf tubes portfolio!
Download the brochure!
www.eppendorf.link/tubes-brochure

Quality Starts Here



High Quality for your Application Needs
Eppendorf Plates® are produced, handled, stored, and delivered according to our premium quality and purity standard. Our plates are manufactured from carefully selected and purest raw materials that comply with international criteria for high purity.


Reach your sustainability goals more easily by using Deepwell Plates BioBased made from min. 95 % renewable resources, according to mass-balance approach (for more information visit www.eppendorf.link/BioBased). Traceable with laser-engraved lot number and expiry date on every plate for sample security.



www.eppendorf.link/appnote382

DNA LoBind® – Recover your nucleic acids
When dealing with low concentrations of nucleic acids, any sample loss could make downstream steps difficult. For example, in workflows including preparation and setup of PCR applications, loss of DNA on vessel surfaces can affect the performance of individual processing steps and can lead to misinterpretation of results. DNA LoBind Tubes and Plates maximize sample recovery of nucleic acids by significantly reducing sample-to-surface binding. They represent the recommended solution for preparing and storing samples containing low amounts of DNA. To minimize the risk of sample loss, the DNA LoBind properties are achieved without surface coating.

Applications
> Preparation or storage of DNA and RNA samples
> Forensic trace analysis
> Preparing dilution series in quantitative qPCR
> Sample preparation in next-generation sequencing
> Creation of genomic or oligonucleotide libraries



www.eppendorf.link/appnote404

Protein LoBind® – Get the most out of your applications
Protein preparation and storage represent critical steps in a wide range of laboratory applications. Unspecific adsorption of up to 90% of protein molecules or peptides to the polymer surface of the inner walls of tubes can significantly contribute to sample loss within 24 hours and artificially affect experimental results. Eppendorf Protein LoBind Tubes and Plates are specifically designed for use in applications where protein concentrations tend to be small and sample recovery is vital for assay results. A special, two-component polymer mix creates a hydrophilic surface that ensures optimized recovery rates of valuable samples.

Applications
> Preparation or storage of protein, peptide or antibody samples
> Storage of virus stock solutions
> Sample preparation in toxicology
> Storage of cell suspensions
> Enzymatic assays

Get all information about the Eppendorf plates portfolio!
Download the brochure!
www.eppendorf.link/plates-brochure

Our Portfolio – Your Choice






Model	Tube 3810X	Safe-Lock Tube 0.5 mL	Safe-Lock Tube 1.5 mL	Safe-Lock Tube 2.0 mL
Page(s)	**9**	**10**	**10**	**10**
Volume	1.5 mL	0.5 mL	1.5 mL	2.0 mL
Bottom shape	conical	conical	conical	round
Max. RCF Eppendorf Quality	30,000 × g	30,000 × g	30,000 × g	25,000 × g
Max. RCF PCR clean	30,000 × g	30,000 × g	30,000 × g	25,000 × g
Max. RCF Biopur®	–	22,000 × g	22,000 × g	22,000 × g
Max. RCF sterile	–	–	–	–
Max. RCF Forensic DNA Grade	–	22,000 × g	22,000 × g	22,000 × g
Light protection	no	yes	yes	yes
BioBased material amount[1)]	no	100 %	100 %	100 %

[1)] According to mass-balance approach (visit www.eppendorf.com/BioBased for more information) [2)] Test conditions: Rotor FA-45-6-30 in Eppendorf Centrifuge 5810 R (using a suitable centrifuge adapter for 15 mL tube), sample: saline solution (density: 1.0 g/mL), controlled centrifugation temp.: 25 °C, centrifugation time: 90 min





Model	Protein LoBind® Tubes/ snap cap, DNA LoBind®, 0.5 mL	Protein LoBind® Tubes/ snap cap, DNA LoBind®, 1.5 mL	Protein LoBind® Tubes/ snap cap, DNA LoBind®, 2.0 mL
Page(s)	**16/17**	**18/19**	**18/19**
Bottom shape	conical	conical	conical
Max. RCF PCR clean	18,000 × g/ 30,000 × g	18,000 × g/ 30,000 × g	18,000 × g/ 25,000 × g

[1)] Test conditions: Rotor FA-45-6-30 in Eppendorf Centrifuge 5810 R (using a suitable centrifuge adapter for 15 mL tube), sample: saline solution (density: 1.0 g/mL), controlled centrifugation temp.: 25 °C, centrifugation time: 90 min

Get all information about the Eppendorf tubes portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/tubes



Eppendorf Tubes® 5.0 mL	Eppendorf Conical Tubes 15 mL	25 mL SnapTec® cap/25 mL screw cap	Eppendorf Conical Tubes 50 mL	Eppendorf Conical Tubes SnapTec® 50
12	**16**	**14**	**16**	**16**
5.0 mL	15 mL	25 mL	50 mL	45 mL
conical	conical	conical	conical	conical
25,000 × g	–	17,000 × g	–	17,000 × g
25,000 × g	–	17,000 × g	–	17,000 × g
25,000 × g	–	–	–	–
25,000 × g	19,500 × g[2)]	17,000 × g	19,500 × g[2)]	17,000 × g
25,000 × g	19,500 × g[2)]	–	19,500 × g[2)]	17,000 × g
yes	yes	yes	yes	no
90 %, screw caps made from fossil-sourced material	90 %, screw caps made from fossil-sourced material	90 %, screw caps made from fossil-sourced material	90 %, screw caps made from fossil-sourced material	no



Protein LoBind® Tubes/ snap cap, DNA LoBind®, 5.0 mL	Protein LoBind® Tubes/ screw cap, DNA LoBind®, 15 mL, conical tubes	Protein LoBind® Tubes/ SnapTec® cap, DNA LoBind®, 25 mL, conical tubes	Protein LoBind® Tubes/ screw cap, DNA LoBind®, 50 mL, conical tubes
18/19	**18/19**	**18/19**	**18/19**
conical	conical	conical	conical
25,000 × g/ 25,000 × g	19,500 × g	14000 × g[1)]/ 17,000 × g	19,500 × g

Our Portfolio – Your Choice





	Microplates		
Model	**MTP 96/F**	**MTP 96/U**	**MTP 96/V**
Page(s)	**20**	**20**	**20**
Number of wells	96 wells	96 wells	96 wells
Total volume per well	400 µL	360 µL	350 µL
Working volume	50 – 350 µL	20 – 320 µL	20 – 320 µL
Material	polypropylene (PP)	polypropylene (PP)	polypropylene (PP)
Bottom shape	F bottom	U bottom	V bottom
Dimensions (W × D × H)[1)2)3)]	127.8 × 85.5 × 14.4 mm	127.8 × 85.5 × 14.4 mm	127.8 × 85.5 × 14.4 mm
Max. RCF	6,000 × g	6,000 × g	6,000 × g
DNA LoBind® available	no	no	yes
Protein LoBind® available	no	no	no

[1)] Optional CO_2/LN_2 backup systems add 8.65 cm/3.5 in to height. [2)] To allow for handles and hinges, add 80 mm to width of upright freezers and 110 mm to the depth of chest freezers. [3)] Door open adds up to 15 cm.




	Deepwell Plates	
Model	**DWP 96/500**	**DWP 96/1000**
Page(s)	**22**	**22**
Number of wells	96 wells	96 wells
Total volume per well	700 µL	1,200 µL
Working volume	30 – 550 µL	30 – 1,000 µL
Material	polypropylene (PP)	polypropylene (PP)
Bottom shape	conical	conical
Dimensions (W × D × H)[1)2)3)]	127.8 × 85.5 × 27.1 mm	127.8 × 85.5 × 44.1 mm
Max. RCF	6,000 × g	6,000 × g
BioBased material amount[4)]	available 2026	available 2026
DNA LoBind® available	yes	yes
Protein LoBind® available	yes	yes

[1)] Optional CO_2/LN_2 backup systems add 8.65 cm/3.5 in to height. [2)] To allow for handles and hinges, add 80 mm to width of upright freezers and 110 mm to the depth of chest freezers. [3)] Door open adds up to 15 cm. [4)] According to mass-balance approach (visit www.eppendorf.com/BioBased for more information)

Get all information about the Eppendorf plates portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/plates







Microplates

MTP 384/F	MTP 384/V	Assay MTP 96/F
20	**20**	**20**
384 wells	384 wells	96 wells
150 µL	140 µL	400 µL
10 – 120 µL	10 – 120 µL	50 – 350 µL
polypropylene (PP)	polypropylene (PP)	polypropylene (PP)
F bottom	V bottom	flat
127.8 × 85.5 × 14.4 mm	127.8 × 85.5 × 14.4 mm	127.8 × 85.5 × 14.4 mm
6,000 × g	6,000 × g	6,000 × g
no	yes	no
no	yes	no





DWP 96/2000	DWP 384/200
22	**22**
96 wells	384 wells
2,400 µL	240 µL
50 – 2,000 µL	20 – 225 µL
polypropylene (PP)	polypropylene (PP)
conical	conical
127.8 × 85.5 × 60 mm	127.8 × 85.5 × 25.1 mm
6,000 × g	6,000 × g
min. 95 %	available 2026
yes	yes
yes	yes

Eppendorf Purity Grades for Tubes and Plates

Eppendorf sample handling consumables stand for highest quality and purity
Our tubes and plates are available in a variety of purity grades (see table below). All purity grades are certified by an ISO 17025 accredited external lab. As a special service, we make the lot-specific certificates available online (www.eppendorf.link/certificates) for all purity grades, but Eppendorf quality.

Purity grades Eppendorf purity grades for tubes and plates	Eppendorf Quality	Eppendorf sterile	Eppendorf PCR clean	Eppendorf Forensic DNA Grade[3) 5)]	Eppendorf Biopur®	sterile, pyrogen-, DNase-, RNase- and DNA-free	Eppendorf PCR clean and protein-free
Continuous quality control for the following relevant criteria:							
Function, tightness, precision	■	■	■	■	■		
Low wetting	■	■	■	■	■		
High chemical resistance	■	■	■	■	■		
High thermal resistance	■	■	■	■	■		
High resistance to centrifugation forces[1)]	■	■	■	■	■		
High transparency	■	■	■	■	■		
Precisely shaped	■	■	■	■	■		
Lot-specific certificates for the following purity criteria:							
Pyrogen-free[6)] (endotoxin-free)		■			■	■	
Sterile (Ph.Eur./USP)		■			■	■	
DNA-free[6)] (Human DNA)			■	■	■	■	■
DNA-free[6)] (Bacteria DNA)					■	■	
DNase-free[6)]			■	■	■	■	■
RNase-free[6)]			■	■	■	■	■
PCR-inhibitor-free[6)]			■	■	■		■
ATP-free[6)]					■		
Proteins[6)]							■
Eppendorf Tubes®							
Safe-Lock Tubes	■		■	■	■[3)]		
Safe-Lock Tubes BioBased[2)]	■		■				
Flex-Tubes®/ 3810X	■		■				
Eppendorf Tubes BioBased[2)] 5.0 mL, 15 mL , 25 mL and 50 mL						■	
Eppendorf Tubes® 5.0 mL	■	■	■	■	■[3)]	■	
Eppendorf Conical Tubes 25 mL	■		■			■	
Eppendorf Conical Tubes 15 mL and 50 mL				■		■	
Eppendorf Conical Tubes SnapTec® 50	■		■			■	
DNA and Protein LoBind® Tubes			■				
PCR Tubes (PCR and real-time PCR)			■	■			
Cap Strips (PCR and real-time PCR)			■				
Eppendorf Plates® and accessories							
Deepwell Plates and Microplates		■	■				
Protein LoBind® Deepwell Plates			■				
Deepwell Plates BioBased[2)]							■
DNA LoBind® Deepwell Plates			■				
Eppendorf twin.tec® PCR Plates			■	■			
Eppendorf twin.tec® Trace PCR plates BioBased[4)]			■				
Eppendorf twin.tec® Trace PCR plates			■				
Heat Sealing Film and Foil			■				
PCR Storage Films and Foils			■				
Plate Lid		■	■				

[1)] For accurate details regarding resistance to centrifugation, please refer to the respective product pages. [2)] BioBased Safe-Lock Tubes, Tubes and Deepwell Plates are made from min. 90 % renewable feedstock, according to mass-balance approach (visit eppendorf.link/BioBased for more information). Screw caps are currently made from fossil-sourced material and will be changed soon. [3)] Individually wrapped. [4)] BioBased twin.tec. Trace PCR Plates are made from at least 86 % renewable feedstock, according to mass-balance approach (visit eppendorf.link/BioBased for more information). [5)] According to ISO 18385. [6)] Testing showed conformity within the detection limits

Eppendorf Tubes® 3810X



The Original
The easy-open, easy-close design of the Eppendorf Tubes® 3810X provides convenient, ergonomic, and reliable one-handed operation. Whether sample preparation, centrifugation or storage – the Eppendorf Tubes® 3810X fit perfectly into your workflows!

Product features
> Tube lid is easy to open and close for ergonomic operation
> Polypropylene provides high resistance to chemicals, mechanical stress, and temperature extremes
> g-Safe®: Exceptional centrifugation stability up to 30,000 × g prevents sample loss due to tube breakage and provides extra safety when working with hazardous samples

Ordering information

Description	Order no.
Eppendorf Tubes® 3810X, 1.5 mL, g-safe® centrifugation stability	
Eppendorf Quality, colorless, 1,000 pcs.	0030125150
Eppendorf Quality, yellow, 1,000 pcs.	0030125207
Eppendorf Quality, red, 1,000 pcs.	0030125193
Eppendorf Quality, blue, 1,000 pcs.	0030125177
Eppendorf Quality, green, 1,000 pcs.	0030125185
PCR clean, colorless, 1,000 pcs.	0030125215
Storage Box 8 × 8, freezer box, for 64 tubes 1 – 2 mL, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140524
Eppendorf Tube Rack, 36 positions, for 1.5 mL and 2.0 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119819

Eppi® – Eppendorf Safe-Lock® Tubes



ACT. The Environmental Impact Factor Label

Unrivaled for Decades

Eppendorf Safe-Lock Tubes are the result of 60 years of continuous improvement and development. Now the "Eppi®" will help customers to make their laboratory work more sustainable with Eppendorf Safe-Lock Tubes BioBased without sacrificing the certified product quality and purity. Trust in the original Eppendorf Safe-Lock Tubes, because your samples deserve nothing but the best. Also available as bio-based variant, made from 100 % renewable ressources according to mass-balance approach that calculates the amount of biobased starting material for polymer production. (more informaton at eppendorf.link/biobased)

Product features

> Hinged Eppendorf Safe-Lock lid prevents unintentional lid opening during incubation and storage
> g-Safe®: Depending on Safe-Lock Tube variant (see manual) exceptional centrifugation stability up to 30,000 × g prevents sample loss due to tube breakage and provides extra safety when working with hazardous samples
> Manufactured without the use of slip agents, plasticizers, and biocides – substances that have been shown to leach from plastic consumables into the sample and negatively affect bio-assay results



Eppendorf Safe-Lock Tubes BioBased are made from 100 % renewable feedstock, according to mass-balance approach (for more information see page 8 & 9 Sustainability chapter or visit www.eppendorf.link/BioBased)

Ordering information

	Description	Order no.
	Eppendorf Safe-Lock® Tubes BioBased 0.5 mL	
New	snap cap, 0.5 mL, Eppendorf Quality, colorless, 1 bag × 500 tubes	0030123042
New	snap cap, 0.5 mL, PCR clean, colorless, 1 bag × 500 tubes	0030123069
	Eppendorf Safe-Lock® Tubes BioBased 1.5 mL	
New	snap cap, 1.5 mL, Eppendorf Quality, colorless, 1,000 tubes (2 bags × 500 tubes)	0030123085
New	snap cap, 1.5 mL, PCR clean, colorless, 1,000 tubes (2 bags × 500 tubes)	0030123140
	Eppendorf Safe-Lock® Tubes BioBased 2.0 mL	
New	snap cap, 2.0 mL, Eppendorf Quality, colorless, 1,000 tubes (2 bags × 500 tubes)	0030123166
New	snap cap, 2.0 mL, PCR clean, colorless, 1,000 tubes (2 bags × 500 tubes)	0030123182
	Eppendorf Safe-Lock® Tubes, 0.5 mL	
	Eppendorf Quality, colorless, 500 tubes	0030121023
	Eppendorf Quality, yellow, 500 tubes	0030121112
	Eppendorf Quality, red, 500 tubes	0030121120
	Eppendorf Quality, blue, 500 tubes	0030121139
	Eppendorf Quality, green, 500 tubes	0030121147
	Eppendorf Quality, assorted colors (per 100), 500 tubes	0030121708
	PCR clean, amber (light protection), 500 tubes	0030121155
	PCR clean, colorless, 500 tubes	0030123301
	Biopur®, colorless, 50 tubes, individually packed	0030121570
	Forensic DNA Grade, colorless, 500 tubes (10 bags × 50 tubes)	0030123603
	Eppendorf Safe-Lock® Tubes, 1.5 mL	
	Eppendorf Quality, colorless, 1,000 tubes (2 bags × 500 tubes)	0030120086
	Eppendorf Quality, yellow, 1,000 tubes (2 bags × 500 tubes)	0030120159
	Eppendorf Quality, red, 1,000 tubes (2 bags × 500 tubes)	0030120167
	Eppendorf Quality, blue, 1,000 tubes (2 bags × 500 tubes)	0030120175
	Eppendorf Quality, green, 1,000 tubes (2 bags × 500 tubes)	0030120183
	Eppendorf Quality, assorted colors (per 200), 1,000 tubes	0030121694
	PCR clean, amber (light protection), 1,000 tubes (2 bags × 500 tubes)	0030120191
	PCR clean, colorless, 1,000 tubes (2 bags × 500 tubes)	0030123328
	Biopur®, colorless, 100 tubes, individually packed	0030121589
	Forensic DNA Grade, colorless, 500 tubes (10 bags × 50 tubes)	0030123611
	Eppendorf Safe-Lock® Tubes, 2.0 mL	
	Eppendorf Quality, colorless, 1,000 tubes	0030120094
	Eppendorf Quality, yellow, 1,000 tubes	0030120205
	Eppendorf Quality, red, 1,000 tubes	0030120213
	Eppendorf Quality, blue, 1,000 tubes	0030120221
	Eppendorf Quality, green, 1,000 tubes	0030120230
	Eppendorf Quality, assorted colors (per 200), 1,000 tubes	0030121686
	PCR clean, amber (light protection), 1,000 tubes	0030120248
	PCR clean, colorless, 1,000 tubes	0030123344
	Biopur®, colorless, 100 tubes, individually packed	0030121597
	Forensic DNA Grade, colorless, 500 tubes (10 bags × 50 tubes)	0030123620
	Storage Box 8 × 8, freezer box, for 64 tubes 1 – 2 mL, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140524
	Eppendorf Tube Rack, 36 positions, for 1.5 mL and 2.0 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119819

Eppendorf Tubes® 5.0 mL



ACT. The Environmental Impact Factor Label

The Missing Link!
Eppendorf Tubes® 5.0 mL. This product represents the perfect option for working with medium–sized sample volumes. It fills the gap between existing tube formats and enables the simple and safe processing of sample volumes up to 5.0 mL.

Product features
> Ergonomic operation: Snap cap - simple, practical and ergonomic singlehand operation. Screw cap - flattened and grooved sides provide optimal grip and user-friendly handling
> Broad operating temperature range: Screw cap tubes: -86 °C – 100 °C. Snap cap tubes: -86 °C – 80 °C (when using the clip ≤ 100 °C)
> Material: High-quality, transparent polypropylene, free of plasticizers, biocides or mold release agents, for reliable test results





Light Protection as well as Transparency
The amber colored Eppendorf Tubes® 5.0 mL with screw cap combine effective protection of your sensitive samples from energy-rich light in the lower wavelength range with a high degree of transparency. You get full control on the insertion depths of pipette tips - often a source of contamination when handling solutions in intransparent tube formats.

www.eppendorf.link/5mL

Ordering information

Description	Order no.
Eppendorf Tubes® BioBased 5.0 mL	
screw cap, 5.0 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, ACT, 200 tubes (2 bags × 100 tubes)	0030122518
Eppendorf Tubes® 5.0 mL, snap cap, 5.0 mL	
Eppendorf Quality, colorless, 200 tubes (2 bags × 100 tubes), ACT	0030119401
PCR clean, colorless, 200 tubes (2 bags × 100 tubes), ACT	0030119460
Biopur®, colorless, 50 tubes, individually wrapped, ACT	0030119479
Forensic DNA Grade, colorless, 200 tubes (4 bags × 50 tubes), ACT	0030119606
sterile, colorless, 200 tubes (10 bags × 20 tubes), ACT	0030119487
PCR clean, amber (light protection), 200 tubes (2 bags × 100 tubes), ACT	0030119452
Eppendorf Tubes® 5.0 mL, screw cap, 5.0 mL	
Eppendorf Quality, colorless, 200 tubes (2 bags × 100 tubes), ACT	0030122305
PCR clean, colorless, 200 tubes (2 bags × 100 tubes), ACT	0030122313
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 200 tubes (2 bags × 100 tubes), ACT	0030122321
Forensic DNA Grade, colorless, 200 tubes (2 bags × 100 tubes), ACT	0030122402
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, amber (light protection), 200 tubes (2 bags × 100 tubes), ACT	0030122330
Eppendorf Tubes® 5.0 mL starter pack, snap cap, 5.0 mL, 400 tubes (2 packages with 2 bags of 100 each), 2 racks (with 12 locations each), white, 8 universal adapters for rotors with bore holes for 15 mL conical tubes, PCR clean, colorless, ACT	0030119380
Eppendorf Tubes® 5.0 mL, starter pack, screw cap, 5.0 mL, 400 tubes (2 packages with 2 bags of 100 each), 2 racks (with 12 locations each), white, 8 universal adapters for rotors with bore holes for 15 mL conical tubes, PCR clean, colorless, ACT	0030122364

Ordering information for DNA and Protein LoBind Tubes can be found at page 18

Ordering information

Eppendorf Tubes® 5.0 mL – System Accessories, 5.0 mL	Order no.
Tube Clip for Eppendorf Tubes® 5.0 mL, 5.0 mL, Eppendorf Quality, 10 pcs.	0030119509
Eppendorf Tube Rack, 12 positions, for 5.0 mL and 15 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119827
Storage Box 5 × 5, freezer box, for 25 tubes 5 mL, 4 pcs., height 64 mm, 2.5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140532
Storage Box 5 × 5, freezer box, for 25 tubes 5 mL screw cap, 2 pcs., height 76 mm, 3 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140613
Rotor FA-45-12-17, aerosol-tight, incl. rotor lid, aluminum, For Centrifuge 5427 R	5409700006
Rotor FA-45-16-17, aerosol-tight, incl. rotor lid, for 16 × Eppendorf Tubes® 5.0 mL, For Centrifuge 5430/5430 R	5427750002
Rotor FA-45-20-17, incl. rotor lid, for 20 Eppendorf Tubes® 5.0 mL, For Centrifuge 5804/5804 R/5810/5810 R	5820765003
Adapter, for 14 Eppendorf Tubes® 5.0 mL, for Rotor S-4-104, Rotor S-4x1000 round buckets and Rotor S-4x750, 2 pcs.	5825739000
Adapter, for 1 Eppendorf Tubes® 5.0 mL, 17 mm × 60 mm, for 100 mL round bucket in Rotor A-4-38, 2 pcs.	5702733008
Adapter, for 1 Eppendorf Tubes® 5.0 mL, for Rotor F-35-6-30, large rotor bore, 2 pcs.	5427747001
Adapter, for 1 Eppendorf Tubes® 5.0 mL, for Rotor F-34-6-38, 2 pcs.	5804777000
Adapter, for 1 Eppendorf Tubes® 5.0 mL, for Rotor F-35-6-30, small rotor bore, 2 pcs.	5427746005
Adapter, for 1 Eppendorf Tubes® 5.0 mL with snap cap, for Rotor FA-45-6-30 and FA-6x50, 2 pcs.	5820730005
Universal adapter, for 1 Eppendorf Tubes® 5.0 mL, for rotors for conical 15 mL tubes, 8 pcs.	5820732008
Adapter, for 8 Eppendorf Tubes® 5.0 mL, for Rotor S-4-72, 2 pcs.	5804793005
Exchangeable thermoblocks, for 8 × Eppendorf Tubes® 5.0 mL	5309000333
Eppendorf SmartBlock 5 mL, Thermoblock for 8 x 5.0 mL vessels, Recommended option: SmartExtender	5309000007
ReservoirRack Module TC, for use in epMotion® ReservoirRacks, temperable, 4 × Eppendorf Tubes® 5.0 mL	5075799340

Eppendorf Conical Tubes 25 mL



The Next Level – Eppendorf Conical Tubes 25 mL!
This member of the big Eppendorf Tube Family fills the gap between the volumes of traditional conical tubes of 15 mL and 50 mL. Optimized height and outstanding quality make these conical tubes great suited for cell biology tasks such as for pooling media from T75 flasks, bacteria culture in midi prep size or overlapping applications like buffer preparation, storage and transport.

Also available in Amber for UV-light sensitive samples and in DNA LoBind and Protein LoBind.

Product features

> Reduced height gives easy sample access even with low-volume pipettes and tips – reduces risk of cross-contamination between pipette and tube
> Single-handed opening and closing through SnapTec® cap version for fast liquid extraction and addition
> Centrifugation stability up to 17,000 x g[1)] for both tube variants - SnapTec® cap and screw cap

[1)] Please note the Instructions For Use for details (www.eppendorf.com/manuals): "Eppendorf Conical Tubes 25 mL, snap cap" and "Eppendorf Conical Tubes 15, 25 and 50 mL"

Applications


> Cell culture applications, optimal for pooling, e.g. pooling media from 3 x T75 flasks (25 mL)
> Sample preparation in microbiology and molecular biology labs, e.g. bacteria culture in midi prep size, cloning, DNA extraction when working with a relatively high amount of biological starting material (in botany)
> Storage and transport of samples and solutions up to 25 mL
> Preparation of master mixes and buffers











Get more Information on LoBind and Amber Tubes

www.eppendorf.link/conicals





Improved sample processing
Greater diameter and lower height than 15 mL conical tubes enable better sample access and faster resuspension of pellets after centrifugation.

Single-handed operation
Supports optimized and faster handling of sample solutions, especially in multi-step protocols.

A Full System of Components



Centrifugation

Centrifuges with rotors for 50 mL conical tubes, e.g. 59xx series and 58xx series: Two adapter variants for snap cap (order no.: 5820 733 004) and screw cap (order no.: 5820 734 000) 25 mL tubes enable usage in 50 mL rotors and buckets.



Heating and Mixing

Eppendorf ThermoMixer® C and Eppendorf ThermoStat C:
Adapter for 25 mL tubes ensures compatibility with Eppendorf SmartBlock 50 mL. (order no.: 5365 000 109)



MixMate®:
Tube Holder 25/50 mL, for 4 × 25/50 mL conical tubes. (order no.: 5353 040 156)



Sample Storage

Single Tube Stand:
Well suited for weighing samples on the balance and for handling individual samples. The viewing slit enables observation of the filling level at any time. (order no.: 0030 119 860)



Tube Rack 25 mL:
Eppendorf Racks for 50 mL conical tubes can be used with the new 25 mL tubes. (order no.: 0030 119 835)



Storage box made of polypropylene:
Lower height allows space-saving storage for up to 9 × 25 mL tubes in 3.5 inches Eppendorf Storage Boxes. (order no.: 0030 140 729)

Ordering information


Description	Order no.
Eppendorf Tubes® BioBased 25 mL	
screw cap, 25 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, ACT, 200 tubes (8 bags × 25 tubes)	0030122534
Eppendorf Conical Tubes 25 mL, SnapTec® cap, 25 mL	
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, amber (light protection), ACT, 150 tubes (6 bags × 25 tubes)	0030118430
Eppendorf Quality, colorless, ACT, 200 tubes (5 bags × 40 tubes)	0030118405
PCR clean, colorless, ACT, 200 tubes (5 bags × 40 tubes)	0030118413
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, ACT, 150 tubes (6 bags × 25 tubes)	0030118421
Eppendorf Conical Tubes 25 mL, SnapTec® cap, 25 mL, Starter Pack, 4 Single Tube Stands, 6 adapters for rotors with bore for 50 mL conical tubes	
PCR clean, colorless, ACT, 200 tubes (5 bags × 40 tubes)	0030118502
Eppendorf Conical Tubes 25 mL, screw cap, 25 mL	
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, amber (light protection), ACT, 200 tubes (8 bags × 25 tubes)	0030122445
Eppendorf Quality, colorless, ACT, 200 tubes (4 bags × 50 tubes)	0030122410
PCR clean, colorless, ACT, 200 tubes (4 bags × 50 tubes)	0030122429
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, ACT, 200 tubes (8 bags × 25 tubes)	0030122437
Eppendorf Conical Tubes 25 mL, screw cap, 25 mL, Starter Pack, 4 Single Tube Stands, 6 adapters for rotors with bore for 50 mL conical tubes	
PCR clean, colorless, ACT, 200 tubes (4 bags × 50 tubes)	0030122500


Ordering information for DNA and Protein LoBind Tubes can be found at page 19

Eppendorf Conical Tubes 15 mL and 50 mL

Conical Competence

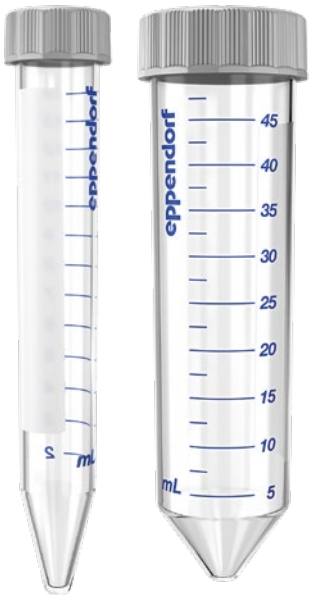The Eppendorf Conical Tubes 15 and 50 mL meet the high demands of diverse laboratory applications. The outstanding quality and specifications make them ideally suited for cell biology applications as well as for sample preparation protocols in microbiology and molecular biology laboratories. Also available as biobased and amber variant.





Product features

> Premium raw material and no use of slip agents, plasticizers, and biocides during manufacturing ensure high sample integrity, high g-Safe® centrifugation stability, and good sample and pellet visibility.
> Cap with flattened and grooved sides supports a user-friendly ergonomic handling, enables a stable upright positioning, and minimizes contamination risk.
> Reliable and safe labelling due to a large writing area on the tube and due to a flat and light-colored cap.

Applications

> Convenient and safe cell culture applications
> Sample preparation in microbiology and molecular biology labs
> Storage of samples and solutions with larger volumes
> Preparation of mastermixes and buffers



Whether centrifugation, mixing, or other applications, the Eppendorf Conical Tubes 15 and 50 mL suit your needs.



Light protection as well as transparency - two benefits in one tube.

Ordering information

	Description	Order no.
New	**Eppendorf Tubes® BioBased 15 mL**, screw cap, 15 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, ACT, 400 tubes (8 bags × 50 tubes). Replaces order no. 0030122526.	0030122631
New	**Eppendorf Tubes® BioBased 50 mL**, screw cap, 50 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, ACT, 480 tubes (24 bags × 20 tubes). Replaces order no. 0030122542.	0030122640
	Eppendorf Conical Tubes, 15 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 400 tubes (8 bags × 50 tubes). Replaces order no. 0030122151.	0030122550
	Eppendorf Conical Tubes, 15 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, amber (light protection), 200 tubes (4 bags × 50 tubes). Replaces order no. 0030122194.	0030122577
	Eppendorf Conical Tubes, 15 mL, Forensic DNA Grade, colorless, 100 tubes, individually wrapped	0030122259
	Eppendorf Conical Tubes, 15 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 500 tubes (20 racks × 25 tubes)	0030122160
	Eppendorf Conical Tubes, 50 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 480 tubes (24 bags × 20 tubes). Replaces order no. 0030122178.	0030122569
	Eppendorf Conical Tubes, 50 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, amber (light protection), 240 tubes (12 bags × 20 tubes). Replaces order no. 0030122224.	0030122607
	Eppendorf Conical Tubes, 50 mL, Forensic DNA Grade, colorless, 48 tubes, individually wrapped	0030122267
	Eppendorf Conical Tubes, 50 mL, sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 300 tubes (12 racks × 25 tubes)	0030122186

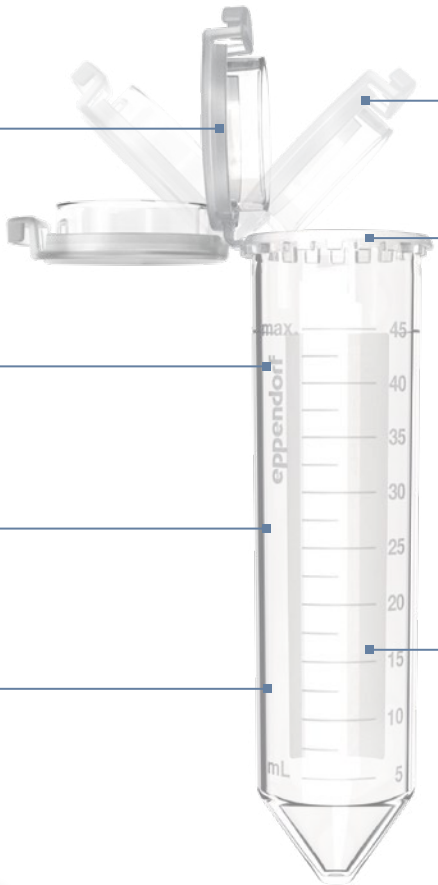
Eppendorf Conical Tubes SnapTec® 50

Innovative SnapTec® cap protected by two technical patents (see also Eppendorf Conical Tube 25 mL with SnapTec® cap)

The SnapTec® 50 tube is autoclavable (121 °C, 20 min.)

High centrifugation stability up to 17,000 x g

Nominal volume 45 mL



Single-handed operation of SnapTec® cap supports optimized and quicker handling of sample solutions, e.g. in multistep protocols

SnapTec® cap avoids risk of mixing lids when working in multistep protocols

Same diameter as Eppendorf Conical Tube 50 mL with screw cap = direct integration into existing lab equipment

Find detailed information on SnapTec® patented lid technology

www.eppendorf.link/SnapTec50




Ordering information

Description	Order no.
Eppendorf Conical Tubes SnapTec® 50, 45 mL	
Eppendorf Quality, colorless, 240 tubes (8 bags × 30 tubes)	0030118650
PCR clean, colorless, 240 tubes (8 bags × 30 tubes)	0030118669
sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 200 tubes (10 bags × 20 tubes)	0030118677
Eppendorf Tube Rack, 12 positions, for 5.0 mL and 15 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119827
Eppendorf Tube Rack, 12 positions, 6 for 5.0 mL and 15 mL tubes and 6 for 25 mL and 50 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119835
Storage Box 5 × 5, freezer box, for 25 tubes 15 mL, 2 pcs., height 127 mm, 5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140583
Storage Box 3 × 3, freezer box, for 9 tubes 50 mL and 4 tubes 15 mL, 2 pcs., height 127 mm, 5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140591

Ordering information for DNA and Protein LoBind Tubes can be found at page 18

Protein LoBind® Tubes

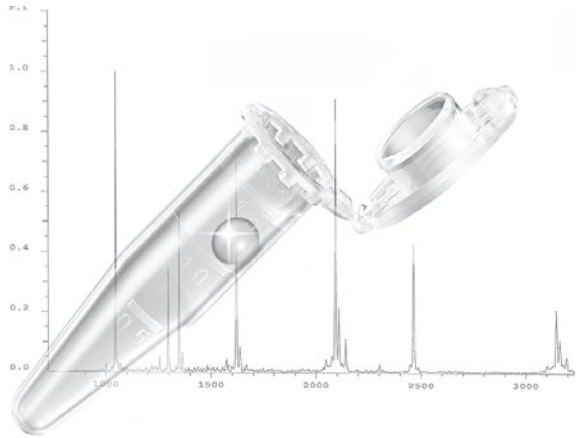Increased Sample Recovery!
Eppendorf Protein LoBind Tubes are specifically designed for use in proteomics or other fields of protein research, where protein concentration tends to be very small and sample recovery is vital for assay results. Significantly more protein can be recovered for downstream analyses, and enzymes remain active.



Product features
> Eppendorf LoBind material ensures optimized sample recovery for improved assay results
> Free of surface coating (e.g., silicone) to minimize the risk of sample interference
> Lot-certified PCR clean purity grade: free of human DNA, DNase, RNase and PCR inhibitors

Ordering information

Description	Order no.
Protein LoBind® Tubes, screw cap, Protein LoBind®, 25 mL, PCR clean, colorless, ACT, 200 tubes (4 bags × 50 tubes)	0030122283
Protein LoBind® Tubes, SnapTec® cap, Protein LoBind®, 25 mL, PCR clean, colorless, 200 tubes (5 bags × 40 tubes)	0030108531
Protein LoBind® Tubes, snap cap, Protein LoBind®, 0.5 mL, PCR clean, colorless, 100 tubes (2 bags × 50 tubes)	0030108094
Protein LoBind® Tubes, snap cap, Protein LoBind®, 1.5 mL, PCR clean, colorless, 100 tubes (2 bags × 50 tubes)	0030108116
Protein LoBind® Tubes, snap cap, Protein LoBind®, 2.0 mL, PCR clean, colorless, 100 tubes (2 bags × 50 tubes)	0030108132
Protein LoBind® Tubes, snap cap, Protein LoBind®, 5.0 mL, PCR clean, colorless, ACT, 100 tubes (2 bags × 50 tubes)	0030108302
Protein LoBind® Tubes, screw cap, Protein LoBind®, 5.0 mL, PCR clean, colorless, ACT, 200 tubes (2 bags × 100 tubes)	0030122356
Protein LoBind® Tubes, screw cap, Protein LoBind®, 15 mL, conical tube, PCR clean, colorless, 200 tubes (4 bags (case size) × 50 tubes). Replaces order no. 0030122216.	0030122593
Protein LoBind® Tubes, screw cap, Protein LoBind®, 50 mL, conical tube, PCR clean, colorless, 240 tubes (12 bags × 20 tubes). Replaces order no. 0030122240.	0030122623

SafeCode Tubes and Plates



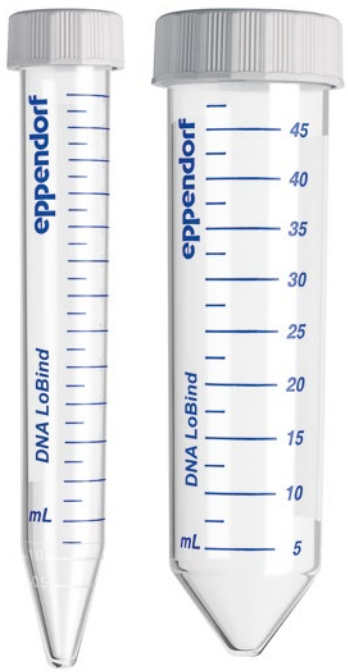
Discover our solution

www.eppendorf.link/safecode

How often do you find samples difficult to identify on your lab bench?

More information about pre-coded tubes can be found in the “Freezer” chapter at page 22

DNA LoBind® Tubes



Improved Reproducibility!
DNA LoBind Tubes maximize sample recovery of nucleic acids by significantly reducing sample–to–surface binding. The solution for sample preparation and long-term storage of your precious samples!

Product features

> Eppendorf LoBind material ensures optimized sample recovery for improved assay results
> Free of surface coating (e.g., silicone) to minimize the risk of sample interference
> Lot-certified PCR clean purity grade: free of human DNA, DNase, RNase and PCR inhibitors

Ordering information

Description	Order no.
DNA LoBind® Tubes, screw cap, DNA LoBind®, 25 mL, PCR clean, colorless, 200 tubes (4 bags × 50 tubes)	0030122275
DNA LoBind® Tubes, SnapTec® cap, DNA LoBind®, 25 mL, conical tubes, PCR clean, colorless, ACT, 200 tubes (5 bags × 40 tubes)	0030108523
DNA LoBind® Tubes, snap cap, DNA LoBind®, 0.5 mL, PCR clean, colorless, 1 bag × 500 tubes	0030108400
DNA LoBind® Tubes, snap cap, DNA LoBind®, 1.5 mL, PCR clean, colorless, 1 bag × 500 tubes	0030108418
DNA LoBind® Tubes, snap cap, DNA LoBind®, 2.0 mL, PCR clean, colorless, 1 bag × 500 tubes	0030108426
DNA LoBind® Tubes, snap cap, DNA LoBind®, 0.5 mL, PCR clean, colorless, 250 tubes (5 bags × 50 tubes)	0030108035
DNA LoBind® Tubes, snap cap, DNA LoBind®, 1.5 mL, PCR clean, colorless, 250 tubes (5 bags × 50 tubes)	0030108051
DNA LoBind® Tubes, snap cap, DNA LoBind®, 2.0 mL, PCR clean, colorless, 250 tubes (5 bags × 50 tubes)	0030108078
DNA LoBind® Tubes, snap cap, DNA LoBind®, 5.0 mL, PCR clean, colorless, 200 tubes (4 bags × 50 tubes)	0030108310
DNA LoBind® Tubes, screw cap, DNA LoBind®, 5.0 mL, PCR clean, colorless, ACT, 200 tubes (2 bags × 100 tubes)	0030122348
DNA LoBind® Tubes, screw cap, DNA LoBind®, 15 mL, conical tubes, PCR clean, colorless, 200 tubes (4 bags × 50 tubes). Replaces order no. 0030122208.	0030122585
DNA LoBind® Tubes, screw cap, DNA LoBind®, 50 mL, conical tubes, PCR clean, colorless, 240 tubes (12 bags × 20 tubes). Replaces order no. 0030122232.	0030122615









Eppendorf Microplates



Get More!
Experience a new dimension of transparency - the Eppendorf Microplates! It has never been this easy and reliable to pipette, control and recover samples with a polypropylene microplate. We offer a wide variety of plates which are highly robust making it easy to find the fitting solution for your application needs. Also available as barcoded versions.

Product features
> g-Safe®: centrifugation stability up to 6,000 × g
> OptiTrack® Matrix: up to 30 % faster sample identification and fewer pipetting errors via high-contrast alphanumeric labeling
> RecoverMax® well design: Optimized well geometry for minimal remaining volume and excellent mixing properties

Technical specifications

					
Description	**Microplate 96/F**	**Microplate 96/U**	**Microplate 96/V**	**Microplate 384/F**	**Microplate 384/V-PP**
Number of wells	96 wells	96 wells	96 wells	384 wells	384 wells
Working volume	50 – 350 µL	20 – 320 µL	20 – 320 µL	10 – 120 µL	5 – 120 µL
Total volume per well	400 µL	360 µL	350 µL	150 µL	140 µL
					
Bottom shape	F bottom	U bottom	V bottom	F bottom	conical

Ordering information

Description	Order no.
Microplate 96/F, wells clear, RecoverMax® well design	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030601106
sterile, white, 80 plates (5 bags × 16 plates)	0030602102
Microplate 96/U, wells clear, RecoverMax® well design	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030601203
sterile, white, 80 plates (5 bags × 16 plates)	0030602200
Microplate 96/V, wells clear, RecoverMax® well design	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030601300
sterile, white, 80 plates (5 bags × 16 plates)	0030602307
Microplate 384/F, wells clear, RecoverMax® well design	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030621107
sterile, white, 80 plates (5 bags × 16 plates)	0030622103
Microplate 384/V, wells clear, RecoverMax® well design	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030621301
sterile, white, 80 plates (5 bags × 16 plates)	0030622308

Eppendorf Assay/Reader Microplates



Unique Clarity!
Elevate the sensitivity of your assays with the Eppendorf Assay/Reader Plates to a higher level! The plates offer an excellent signal–to–noise ratio, resulting in an extremely low detection limit. Whether fluorescence or chemiluminescence - select the most suitable plate for your assay! Solid plates are suitables for top-reading plates readers. Clear plates and black/clear plates can be used with top- and bottom-reading plates readers.

Product features
> Black Eppendorf Microplates offer an excellent signal-to-noise ratio – for clear signals even with low-concentration samples
> White Eppendorf Microplates are optimized for high sensitivity in the detection of luminescence signals by maximizing reflection
> Solid black and white assay plates are made of polypropylene resulting in high resistance to chemicals, mechanical stress, and temperature extremes

Ordering information

Description	Order no.
Microplate 96/F, wells white	
PCR clean, gray, 80 plates (5 bags × 16 plates)	0030601475
Microplate 96/U, wells white	
PCR clean, gray, 80 plates (5 bags × 16 plates)	0030601572
Microplate 96/V, wells white	
PCR clean, gray, 80 plates (5 bags × 16 plates)	0030601670
Microplate 384/V, wells white	
PCR clean, gray, 80 plates (5 bags × 16 plates)	0030621670
Microplate 96/F, wells black	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030601700
Microplate 96/U, wells black	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030601807
Microplate 96/V, wells black	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030601904
Microplate 384/V, wells black	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030621905

Eppendorf Deepwell Plates

ACT. The Environmental Impact Factor Label




Reliability and Reproducibility!
Eppendorf Deepwell Plates are high performance plates fulfilling the high requirements of all automated applications. They combine innovative features, like rims in different colors for process differentiation, the OptiTrack® matrix, and robustness, as well as stability. Also available as barcoded versions.

Product features
> Available in 4 different colored rims for process differentiation
> Geometric consistency for robotic applications
> g-Safe®: high centrifugation stability up to 6,000 × g for faster protocols and improved sample quality

Ordering information

Description	Order no.
Deepwell Plate 96/500 µL, wells clear, 500 µL	
PCR clean, white, 40 plates (5 bags × 8 plates)	0030501101
PCR clean, yellow, 40 plates (5 bags × 8 plates)	0030501110
PCR clean, green, 40 plates (5 bags × 8 plates)	0030501136
PCR clean, blue, 40 plates (5 bags × 8 plates)	0030501144
PCR clean, white, 120 plates (10 bags × 12 plates)	0030505107
sterile, white, 40 plates (5 bags × 8 plates)	0030502108
sterile, yellow, 40 plates (5 bags × 8 plates)	0030502116
sterile, green, 40 plates (5 bags × 8 plates)	0030502132
sterile, blue, 40 plates (5 bags × 8 plates)	0030502140
sterile, white, 120 plates (10 bags × 12 plates)	0030506103
Deepwell Plate 96/1000 µL, wells clear, 1,000 µL	
PCR clean, white, 20 plates (5 bags × 4 plates)	0030501209
PCR clean, yellow, 20 plates (5 bags × 4 plates)	0030501217
PCR clean, green, 20 plates (5 bags × 4 plates)	0030501233
PCR clean, blue, 20 plates (5 bags × 4 plates)	0030501241
PCR clean, white, 80 plates (10 bags × 8 plates)	0030505204
sterile, white, 20 plates (5 bags × 4 plates)	0030502205
sterile, yellow, 20 plates (5 bags × 4 plates)	0030502213
sterile, green, 20 plates (5 bags × 4 plates)	0030502230
sterile, blue, 20 plates (5 bags × 4 plates)	0030502248
sterile, white, 80 plates (10 bags × 8 plates)	0030506200
Deepwell Plate 96/2000 µL, wells clear, 2,000 µL	
PCR clean, white, 20 plates (5 bags × 4 plates)	0030501306
PCR clean, yellow, 20 plates (5 bags × 4 plates)	0030501314
PCR clean, green, 20 plates (5 bags × 4 plates)	0030501330
PCR clean, blue, 20 plates (5 bags × 4 plates)	0030501349
PCR clean, white, 80 plates (10 bags × 8 plates)	0030505301
sterile, white, 20 plates (5 bags × 4 plates)	0030502302
sterile, yellow, 20 plates (5 bags × 4 plates)	0030502310
sterile, green, 20 plates (5 bags × 4 plates)	0030502337
sterile, blue, 20 plates (5 bags × 4 plates)	0030502345
sterile, white, 80 plates (10 bags × 8 plates)	0030506308
Deepwell Plate 384/200 µL, wells clear, 200 µL	
PCR clean, white, 40 plates (5 bags × 8 plates)	0030521102
sterile, white, 40 plates (5 bags × 8 plates)	0030522109
PCR clean, white, 120 plates (10 bags × 12 plates)	0030525108
sterile, white, 120 plates (10 bags × 12 plates)	0030526104

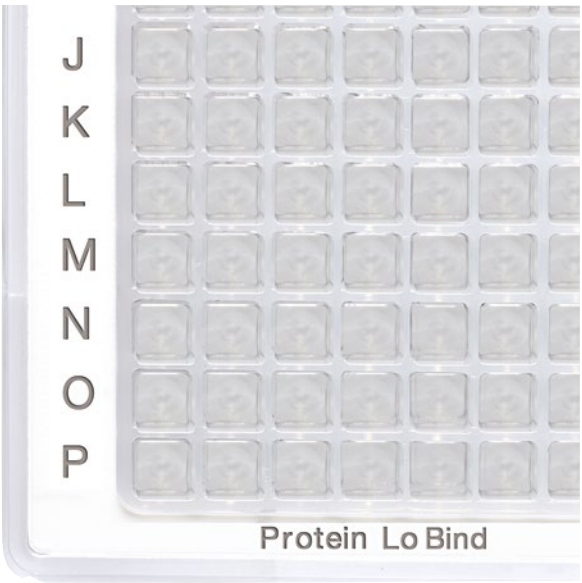Protein LoBind® Plates



Optimized Sample Recovery!
Eppendorf Protein LoBind Plates are specifically designed for use in proteomics or other fields of protein research, where protein concentration tend to be very small and sample recovery is vital for assay results. Significantly more protein can be recovered for downstream analysis and enzymes remain active. Also available as barcoded versions.

Product features
> Eppendorf LoBind material ensures excellent sample recovery for improved assay results
> Free of surface coating (e.g., silicone) to minimize the risk of sample interference
> Lot-certified PCR clean purity grade: free of human DNA, DNase, RNase and PCR inhibitors

Ordering information

Description	Order no.
Deepwell Plate 96/500 µL, Protein LoBind®, wells colorless, 500 µL	
PCR clean, white, 40 plates (5 bags × 8 plates)	0030504100
PCR clean, yellow, 40 plates (5 bags × 8 plates)	0030504119
PCR clean, white, 120 plates (10 bags × 12 plates)	0030508106
Deepwell Plate 96/1000 µL, Protein LoBind®, wells colorless, 1,000 µL	
PCR clean, white, 20 plates (5 bags × 4 plates)	0030504208
PCR clean, yellow, 20 plates (5 bags × 4 plates)	0030504216
PCR clean, white, 80 plates (10 bags × 8 plates)	0030508203
Deepwell Plate 96/2000 µL, Protein LoBind®, wells colorless, 2,000 µL	
PCR clean, white, 20 plates (5 bags × 4 plates)	0030504305
Deepwell Plate 384/200µL, Protein LoBind®, wells colorless, 200 µL	
PCR clean, white, 40 plates (5 bags × 8 plates)	0030524101
PCR clean, white, 120 plates (10 bags × 12 plates)	0030528107
Microplate 384/V-PP, Protein LoBind®, wells clear, 140 µL	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030624300
PCR clean, white, 240 plates (10 bags × 24 plates)	0030628306

Eppendorf Deepwell Plates BioBased

Sustainable and Reproducible!
Eppendorf Deepwell Plates Biobased are high performance plates fulfilling the high requirements of all automated applications made from min. 95 % renewable feedstock, according to mass-balance approach*. They are ACT labeled and produced in our ISCC plus certified production facility. They combine innovative features, like rims in different colors for process differentiation, robustness and the laser-engraved lot-number and expiry date on each plate. Also available as barcoded versions.

*check www.eppendorf.link/biobased for more information

Product features
> Available in 2 different colored rims for process differentiation
> Geometric consistency for robotic applications
> Laser-engraved lot-number and expiry date on every plate

Ordering information

Description	Order no.
Eppendorf Deepwell Plates BioBased 96/2000 µL, spring green, wells clear, 2,000 µL	
PCR clean and protein-free, spring green, 20 plates (5 bags × 4 plates)	0030 501 020
Eppendorf Deepwell Plates BioBased 96/2000 µL, white, wells clear (polystyrene), 2,000 µL	
PCR clean and protein-free, white, 20 plates (5 bags × 4 plates)	0030 501 012

DNA LoBind® Plates

Improved Reproducibility!
DNA LoBind Plates maximize sample recovery of nucleic acids by significantly reducing sample-to-surface binding. The reliable solution for sample preparation and long-term storage of your precious samples! Also available as barcoded versions.

Product features
> Eppendorf LoBind material ensures optimized sample recovery for improved assay results
> Free of surface coating (e.g. silicone) to minimize the risk of sample interference
> Lot-certified PCR clean purity grade: free of human DNA, DNase, RNase and PCR inhibitors

Ordering information

Description	Order no.
Deepwell Plate 96/500µL, DNA LoBind®, wells clear, 500 µL, LoBind®	
PCR clean, white, 40 plates (5 bags × 8 plates)	0030503104
PCR clean, blue, 40 plates (5 bags × 8 plates)	0030503147
PCR clean, white, 120 plates (10 bags × 12 plates)	0030507100
Deepwell Plate 96/1000µL, DNA LoBind®, wells clear, 1,000 µL, LoBind®	
PCR clean, white, 20 plates (5 bags × 4 plates)	0030503201
PCR clean, blue, 20 plates (5 bags × 4 plates)	0030503244
PCR clean, white, 80 plates (10 bags × 8 plates)	0030507207
Deepwell Plate 384/200µL, DNA LoBind®, wells clear, 200 µL, LoBind®	
PCR clean, white, 40 plates (5 bags × 8 plates)	0030523105
PCR clean, white, 120 plates (10 bags × 12 plates)	0030527100
Microplate 96/V-PP, DNA LoBind®, wells clear, 350 µL, LoBind®	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030603303
Microplate 384/V-PP, DNA LoBind®, wells clear, 140 µL, LoBind®	
PCR clean, white, 80 plates (5 bags × 16 plates)	0030623304
PCR clean, white, 240 plates (10 bags × 24 plates)	0030627300

Plate Accessories

Description
Eppendorf Sealing Options provide for a secure and reliable closure. Make a good choice for incubation, processing, storage, or archiving your samples!



Sealing options for Sample Preparation and Storage
> Sealing Mats are reusable, suitable for short-term storage and can be autoclaved.
> Heat Sealing Film and Foil for continuous locking with reliable evaporation protection
> Foil products are made of aluminum, can be pierced, and protect light-sensitive samples

Ordering information

Description	Order no.
Eppendorf Storage Film, self-adhesive, PCR clean, 100 pcs. (2 bags × 50 pcs.)	0030127870
Eppendorf Storage Foil, self-adhesive, PCR clean, 100 pcs.	0030127889
Eppendorf Sealing Mat, for DWP 96/2000 , PCR clean, 50 pcs. (5 bags × 10 pcs.)	0030127960
Eppendorf Sealing Mat, for DWP 96/1000 and DWP 96/500, PCR clean, 50 pcs. (5 bags × 10 pcs.)	0030127978
Eppendorf Plates® Lid, for MTP and DWP, PCR clean, 80 pcs. (5 bags × 16 pcs.)	0030131517
Eppendorf Plates® Lid, for MTP and DWP, sterile, 80 pcs. (5 bags × 16 pcs.)	0030131525
Eppendorf Heat Sealing Film, PCR clean, 100 pcs.	0030127838
Eppendorf Heat Sealing Foil, PCR clean, 100 pcs.	0030127854

Tube & Cuvette Racks

Eppendorf Tube and Cuvette Racks
> Made from high quality polypropylene (PP):
  > Ensuring dimensional stability across a broad temperature range (-86° C to 121° C)
> Providing chemical resistance
> The racks are UV-light resistant
> Six different formats always offer an easy choice for all common tubes and cuvettes



Ordering information

Description	Order no.
Eppendorf Tube Rack, 48 positions, for 0.5 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119800
Eppendorf Tube Rack, 12 positions, for 5.0 mL and 15 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119827
Eppendorf Tube Rack, 12 positions, 6 for 5.0 mL and 15 mL tubes and 6 for 25 mL and 50 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119835
Eppendorf Cuvette Rack, 30 positions, for glass and plastic cuvettes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119851
Eppendorf Tube Rack, 36 positions, for cryogenic tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119843
Eppendorf Tube Rack, 36 positions, for 1.5 mL and 2.0 mL tubes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119819

Tubes and Cuvettes Accessories

Micropestle
> Two sides for optimal fit in 1.5 mL and 2.0 mL vessels
> Autoclavable (121 °C, 20 min)



Ordering information

Description	Order no.
Micropestle, for resuspending pellets in 1.5/2.0 mL vessels, 10 pcs.	0030120973

Eppendorf Storage Boxes
> Made of polypropylene (PP) for high stability in freezing applications and smooth opening and closing
> For freezing to -86 °C
> High-contrast permanent alphanumeric marking of each location through laser labeling enables easy sample identification and minimizes risk of sample mix-up



Ordering information

Description	Order no.
Storage Box 10 × 10, freezer box, for 100 cryogenic tubes w. int. thread, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140508
Storage Box 9 × 9, freezer box, for 81 screw cap (cryog.) tubes 1 – 2 mL, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140516
Storage Box 9 × 9, freezer box, for 81 screw cap (cryog.) tubes 3 mL, 2 pcs., height 76 mm, 3 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140540
Storage Box 9 × 9, freezer box, for 81 screw cap (cryog.) tubes 4 – 5 mL, 2 pcs., height 102 mm, 4 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140567
Storage Box 8 × 8, freezer box, for 64 tubes 1 – 2 mL, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140524
Storage Box 5 × 5, freezer box, for 25 tubes 5 mL, 4 pcs., height 64 mm, 2.5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140532
Storage Box 5 × 5, freezer box, for 25 tubes 5 mL screw cap, 2 pcs., height 76 mm, 3 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140613
Storage Box 5 × 5, freezer box, for 25 tubes 15 mL, 2 pcs., height 127 mm, 5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140583
Storage Box 3 × 3, freezer box, for 9 tubes 25 mL, 2 pcs., height 89 mm, 3.5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140729
Storage Box 3 × 3, freezer box, for 9 tubes 50 mL and 4 tubes 15 mL, 2 pcs., height 127 mm, 5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140591

Our Portfolio – Your Choice









Model	Eppendorf µCuvette® G1.0	Eppendorf UVette®	Macro Vis Cuvette	Semi-micro Vis Cuvette
Page(s)	**28**	**28**	**29**	**29**
dsDNA concentration range (UV 260 nm)	25 ng/µL – 1,500 ng/µL	2.5 ng/µL – 750 ng/µL	1 pg/µL 1,000 pg/µL (Pico Green Assay)	1 pg/µL 1,000 pg/µL (Pico Green Assay)
BSA concentration range (UV 280 nm)	758 ng/µL – 45,450 ng/µL	76 ng/µL – 22,725 ng/µL	0.01 ng/µL – 0.01 µg/µL (NanoOrange Assay)	0.01 ng/µL – 0.01 µg/µL (NanoOrange Assay)
Colorimetric protein assays	yes	yes	yes	yes
OD 600 methods	no	yes	yes	yes
Fluorescence measurements	yes	yes	yes	yes
UV transparency	>180 nm	>220 nm	–	–
Light transmission	180 nm – 2,000 nm	220 nm – 1,600 nm	300 nm – 900 nm	300 nm – 900 nm
Material	quartz glass (with hydrophobic coating)	UV-transparent plastic	PMMA	PMMA
Dimensions (W × D × H)	12.5 × 12.5 × 48 mm	12.5 × 12.5 × 36 mm / 0.49 × 0.49 × 1.42 in	12.5 × 12.5 × 45 mm	12.5 × 12.5 × 45 mm
Temperature control	no	no	yes	no
Minimum filling volume				
in Eppendorf photometers	1.5 µL	50 µL	1,000 µL	400 µL
in devices of other manufacturers	–	50 µL	2,500 µL	1,500 µL
Maximum filling volume	10 µL	2,000 µL	4,500 µL	3,000 µL
Sample light path length	1 mm	2 mm and 10 mm	10 mm	10 mm
Cuvette blank	≤0.05 A at 260 nm	≤0.5 A at 260 nm	–	–
Height of light source	8.5 mm	8.5 mm[1)]	all common cell heights	all common cell heights
Use in Eppendorf BioPhotometer®	yes	yes	yes	yes
Use in Eppendorf BioSpectrometer®	yes	yes	yes	yes
Use in devices of other manufacturers	no	yes (adapters available)	yes	yes

[1)] adapters available for height adjustment

Get all information about the Eppendorf detection portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/detection

Eppendorf µCuvette® G1.0



One droplet is the limit?
The µCuvette G1.0 is in your range: Only 1.5 µL of a sample is needed. The optical path length of only 1 mm enables a light path that is 10x shorter than the light path on standard cuvettes: Measure high nucleic acid and protein concentrations.

Product features
> Microvolume measuring cell for measuring 1.5 – 10 µL sample volumes
> Concentration determination of nucleic acids and proteins, amongst other target analytes
> Measurement of highly concentrated samples without prior dilution

Ordering information

Description	Order no.
Eppendorf µCuvette® G1.0, Microvolume measuring cell for Eppendorf BioPhotometer® and BioSpectrometer®	6138000018

Eppendorf UVette®



Working with very low amount of samples?
The UVette is a disposable UV/Vis cuvette with a light transmission of 220 nm to 1,600 nm for spectrophotometer and photometers. As an example of Eppendorf's expertise in the production of high quality consumables, the UVette offers superb purity, convenience and precision for photometric analysis. The unique shape of the UVette combines two optical light path lengths to offer greater flexibility.

Product features
> Suitable for measuring small volumes (≥50 µL)
> UV and Vis measurements from 220 nm to 1,600 nm
> UV transparent plastic, free of fluoropolymers and other halogenated hydrocarbons

Ordering information

Description	Order no.
UVette® 220 nm – 1,600 nm, original Eppendorf plastic cuvette, individually packed, (including RNase-free, DNase-free) and protein-free, PCR clean, 50 – 2,000 µL, 80 pcs.	0030106300
UVette® starter set, 80 UVettes and 1 universal adapter for light path height 15 mm, convertible to 8.5 mm, 50 – 2,000 µL	4099100007
UVette® routine pack 220 nm – 1,600 nm, reclosable box, Eppendorf Quality, 50 – 2,000 µL, 200 pcs.	0030106318
Adapter for UVette®, for photometer/spectrophotometer with light path height	
8.5 mm	4099001009
10 mm	4099002005
15 mm	4099003001
20 mm	4099005004
Eppendorf Cuvette Rack, 30 positions, for glass and plastic cuvettes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119851

Eppendorf Vis Cuvettes



Optimized Clarity!
The Eppendorf Vis Cuvettes are disposable cuvettes made of clear plastic with a light transmission of 300 nm to 900 nm. These cuvettes are suitable for applications outside of the UV range, such as colorimetric protein assays (Bradford, Lowry, etc.), determining of the optical density of bacterial cultures (OD600 methods), and kinetic and fluorescence measurements.

Product features
> Two different cuvette sizes (semi-micro and macro) for a wide variety of volumes and applications
> Disposable cuvettes made of clear plastic with a light transmission of 300 nm to 900 nm

Ordering information

Description	Order no.
Eppendorf macro Vis Cuvette, plastic cuvette for measurements in the Vis range, max. filling volume 4,500 µL	
1,000 cuvettes (10 boxes × 100 cuvettes)	0030079345
Eppendorf semi-micro Vis Cuvette, plastic cuvette for measurements in the Vis range	
max. filling volume 3,000 µL	0030079353
Eppendorf Cuvette Rack, 30 positions, for glass and plastic cuvettes, polypropylene, numbered positions, autoclavable, 2 pcs.	0030119851



Centrifuges and Rotors



We introduced our very first centrifuge in 1964 as an integral part of the Eppendorf Microliter System, and revolutionized life science research practices worldwide. To this day, the Eppendorf name remains synonymous with creative design, innovative technology and reliable performance that stand the test of time.
The Eppendorf approach to product development is about listening to our customers' needs, understanding daily laboratory routines and anticipating future trends. The result is a comprehensive line of centrifuges that fulfill the demands for a wide range of applications.
Our goal is to provide you with a product solution that not only leaves you thoroughly satisfied but that is also comfortable and easy to use. That is why Eppendorf centrifuges are designed to go beyond speed and capacity to offer you unparalleled ergonomic operation and superior temperature management. With this sound foundation and our extensive experience, Eppendorf is proud to serve you as your expert partner in centrifugation.

Our Centrifuge Portfolio – Your Centrifuge Solution
From your personal 12-place microcentrifuge to compact and super-versatile benchtop centrifuges to high-speed and ultracentrifuges, our portfolio offers comprehensive solutions for all your separation applications in the areas of molecular biology, biochemistry, cell biology and material science.

Microcentrifuges



General purpose centrifuges



Multipurpose centrifuges



Whether you wish to spin just a few tubes at a time or you require extra versatility for volumes up to four liters or high-throughput of tubes and plates, the Eppendorf benchtop centrifuge portfolio offers solutions for your daily separation tasks.

Looking to process more than four liters per run? Do you need increased speeds up to 110,000 x g? In either case, you will find our high-speed floorstanding centrifuges are your best choice. For super-speed applications requiring up to 1,050,000 x g, our range of innovative and user-friendly ultracentrifuges provide the perfect solution.

High-Speed centrifuges



Ultracentrifuges



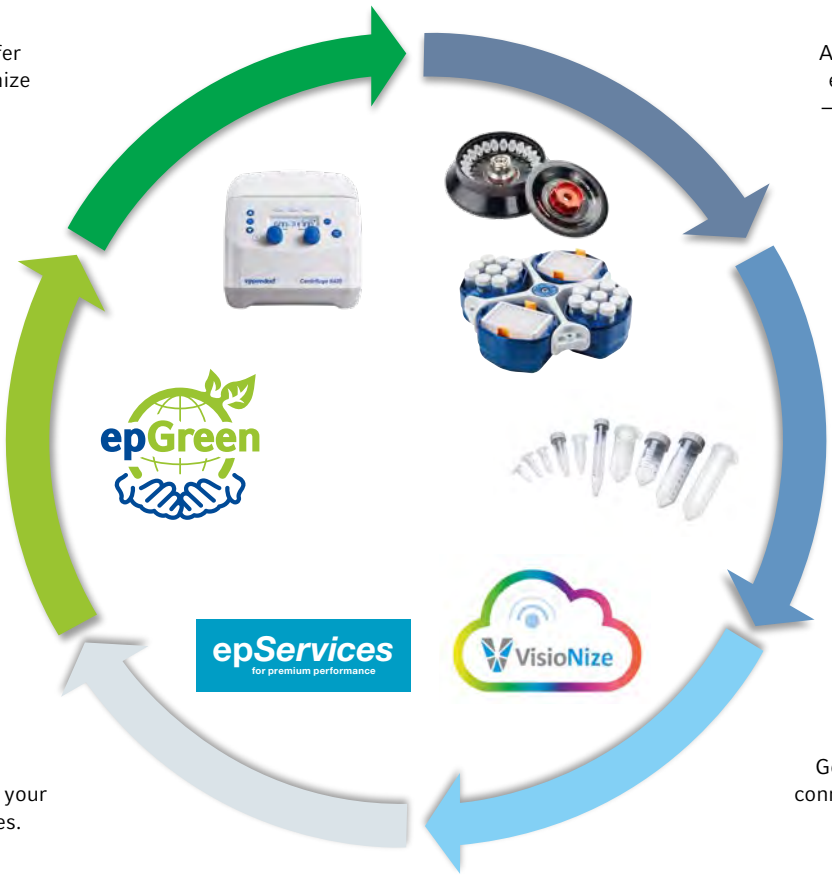
Your challenges are multidimensional – so are our offerings

In your daily research work, you will encounter a variety of challenges. That's why we continuously work to understand your unique issues and provide you with tailored solutions to suit your needs, so you can spend more time focusing on your research. Our solutions go beyond the centrifuge itself to provide everything you need to ensure the best performance and best results every day.

CENTRIFUGES
Our high-quality devices offer innovative features to optimize your experience and your results.

ROTORS & ADAPTERS
A great variety of accessories ensure application flexibility – for your separation tasks of today and tomorrow.

SUSTAINABILITY
Sustainable production, energy-saving operation and an innovative cooling system are just some of the ways Eppendorf supports the environment.



CONSUMABLES
Protect your valuable samples by using only the best consumables tailored to your needs in format, size and purity grades.

SERVICE
Enjoy peace-of-mind and maximize your uptime with your choice of Eppendorf Services.

DIGITAL PRODUCTS
Get everything you need for a connected and paper-free lab of the future.

With Eppendorf at your side, you can be sure to have excellent equipment as well as a great team to support you. From our trusted sales representatives to our dedicated applications and technical support teams to our highly skilled service technicians – you will always find a helping hand when you need it.

Learn more about the Eppendorf centrifuge portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/centrifugation

Our Portfolio – Your Choice







Model	MiniSpin®/MiniSpin® plus	5418 R	5420
Positioning	Space-saving 12-place mini-centrifuge for quick spin downs even in the smallest workstation, non-refrigerated	Compact refrigerated 18-place microcentrifuge for temperature sensitive samples	Small footprint 24-place microcentrifuge for molecular biology routine applications, non-refrigerated
Page(s)	10	11	12
Max. capacity	12 × 1.5/2.0 mL	18 × 1.5/2.0 mL	24 × 1.5/2.0 mL
Max. RCF	12,100 × g/14,100 × g	16,873 × g	21,300 × g
Max. speed	13,400 rpm/14,500 rpm	14,000 rpm	15,060 rpm
Rotors available	2	1	2
Temperature control range		0 °C to +40 °C	
Dimensions (W × D × H)	22.5 × 23.0 × 13.0 cm / 8.86 × 9.06 × 5.12 in	30 × 46 × 25 cm / 11.7 × 18.23 × 9.8 in	24 × 35 × 22 cm / 9.4 × 13.8 × 8.7 in
Weight w/o accessories	3.7 kg / 8.16 lb/4.1 kg / 9 lb	22 kg / 48.5 lb	13 kg / 28.7 lb
Max. power consumption	70 W/85 W	320 W	290 W
Noise level	< 49 dB(A)/< 52 dB(A)	< 57 dB(A)	< 56 dB(A)
Height (with open lid)	25 cm / 9.8 in	52 cm / 20 in	44 cm / 17.3 in
Display	LCD	large LCD	large, brightly lit LCD
Tube/plate/bottle capacity			
1.5/2.0 mL Eppendorf Tubes®	12	18	24
Eppendorf Tubes® 5.0 mL	–	–	–
8-place PCR strips	2	–	4
15 mL conical tubes	–	–	–
25 mL conical tubes	–	–	–
50 mL conical tubes	–	–	–
13 mm round-bottom and blood collection tubes	–	–	–
16 mm round-bottom and blood collection tubes	–	–	–
17.5 mm round-bottom and blood collection tubes	–	–	–
PCR plates/MTP	–	–	–
Deepwell plates (DWP)	–	–	–

Learn more about the Eppendorf microcentrifuge portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/microcentrifuges







5425 / 5425 R	**5427 R**	**5430 / 5430 R**
Whisper quiet 24-place standard microcentrifuge with outstanding feature set for broad range of applications, refrigerated for temperature-sensitive samples or non-refrigerated	High-throughput 48-place microcentrifuge, refrigerated (green cooling liquid (R290)) for temperature sensitive samples	Crossover microcentrifuge with high versatility and 12 rotor options including rotor for 15/50 mL conical tubes, 30-place high-speed rotor and swing-bucket rotor for MTPs or DWPs, refrigerated for temperature sensitive samples or non-refrigerated
13	**15**	**17**
10 × 5.0 mL	48 × 1.5/2.0 mL	48 × 1.5/2.0 mL, 6 × 50 mL, 2 × MTP
21,300 × g	25,001 × g	30,130 × g
15,060 rpm	16,220 rpm	17,500 rpm
6	9	12
-10 °C to +40 °C	-11 °C to 40 °C	-11 °C to 40 °C
24 × 39 × 24 cm / 9.5 × 15.4 × 9.5 in / 29 × 48 × 26 cm / 11.42 × 18.9 × 10.24 in	31.9 × 54.0 × 25.4 cm / 12.6 × 21.3 × 10 in	34 × 42 × 25 cm / 11.2 × 16.3 × 9.8 in / 38 × 64 × 29 cm / 15 × 25.2 × 11.7 in
15.6 kg / 34.4 lb / 21.0 kg / 46.3 lb	30 kg / 66.1 lb	29 kg / 63.9 lb / 56 kg / 123.5 lb
280 W / 360 W	495 W	475 W / 1,050 W
average of 45 dB(A) in the first 12 minutes and < 51 dB(A) thereafter with Rotor FA-24x2 / < 54 dB(A) for all other rotors	< 55 dB(A) with rotor FA-45-48-11	< 58 dB(A) with Rotor F-45-30-11 / < 54 dB(A) with Rotor F-45-30-11
48 cm / 18.8 in / 50.8 cm / 20.0 in	56 cm / 21.9 in	56 cm / 21.8 in / 63 cm / 24.8 in
large, brightly lit LCD	large, brightly lit LCD	large, brightly lit LCD
24	48	48
10	12	16
12	6	8
–	–	6
–	–	6
–	–	6
–	–	12
–	–	12
–	–	12
1 (divisible)	–	2
–	–	2

epServices
for premium performance

You will find detailed information on services for these products in the “Service Products” chapter.

Our Portfolio – Your Choice



Model	5702 / 5702 R / 5702 RH	5804 / 5804 R
Positioning	General purpose centrifuge with medium capacity for low speed cell culture applications, refrigerated for temperature sensitive samples, active heating and cooling to improve cell viability or non-refrigerated	High speed multipurpose centrifuge with medium capacity, refrigerated for temperature sensitive samples or non-refrigerated
Page(s)	**20**	**24**
Max. capacity	4 × 100 mL	4 × 250 mL/2 × 5 MTP
Max. RCF	3,000 × g	20,913 × g
Max. speed	4,400 rpm	14,000 rpm
Temperature control range	-9 °C to 40 °C / -9 °C to 42 °C	-9 °C to 40 °C
Dimensions (W × D × H)	32 × 40 × 24 cm / 12.6 × 15.6 × 9.6 in / 38 × 58 × 27 cm / 15 × 22.9 × 10.6 in / 38 × 58 × 27 cm / 15 × 22.9 × 10.6 in	46.6 × 55.0 × 33.7 cm / 18.4 × 21.7 × 13.3 in / 63.4 × 55.0 × 34.2 cm / 25.0 × 21.7 × 13.5 in
Footprint (dimensions w/o front panel, WxD)	32 × 40 cm / 12.6 × 15.6 in / 38 × 58 cm / 15 × 22.9 in	47 × 50 cm / 18.4 × 21.7 in / 64 × 50 cm / 25 × 21.7 in
Weight w/o accessories	19 kg / 41.9 lb / 35 kg / 77.1 lb / 35 kg / 77.1 lb	55 kg / 121.3 lb / 80 kg / 176.4 lb
Max. power consumption	200 W / 380 W / 380 W	900 W / 1,650 W
Noise level	< 52 dB(A) with Rotor A-4-38 / <46 dB(A) with Rotor A-4-38 / <46 dB(A) with Rotor A-4-38	< 62 dB(A) / < 58 dB(A)
Height (with open lid)	53 cm / 20.7 in / 60 cm / 23.4 in / 60 cm / 23.4 in	74 cm / 29 in
Display	LCD	large, brightly lit LCD
Tube/plate/bottle capacity		
1.5/2.0 mL Eppendorf Tubes®	24	104
Eppendorf Tubes® 5.0 mL	4	32
8-place PCR strips	–	6
15 mL conical tubes	20	40
25 mL conical tubes	4	16
50 mL conical tubes	4	16
13 mm round-bottom and blood collection tubes	40	56
16 mm round-bottom and blood collection tubes	16	52
17.5 mm round-bottom and blood collection tubes	24	48
180 – 250 mL bottles (flat)	–	4
500 mL Corning®	–	–
750 mL bottles	–	–
1,000 mL Eppendorf bottles	–	–
1,000 mL standard bottles	–	–
PCR plates/MTP	–	10
Deepwell plates (DWP)	–	4

Learn more about the Eppendorf multipurpose centrifuge portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/multipurpose-centrifuge







5810 / 5810 R	**5910 Ri**	**5920 R**
Compact multipurpose centrifuge with medium capacity, refrigerated for temperature sensitive samples or non-refrigerated	Super versatile multipurpose centrifuge with an intuitive touch screen user interface and high capacity for a broad range of consumables, refrigerated for temperature sensitive samples	High-throughput multipurpose centrifuge with very high capacity, refrigerated for temperature sensitive samples
24	**44**	**44**
4 × 750 mL/4 × 4 MTP	68 × 15 mL/36 × 50 mL/4 × 1000 mL/ 4 × 5 MTP	4 × 1,000 mL/4 × 7 MTP
20,913 × g	22,132 × g	21,194 × g
14,000 rpm	14,000 rpm	13,700 rpm
-9 °C to 40 °C	-11 °C to 40 °C	-11 °C to 40 °C
53.5 × 60.8 × 34.5 cm / 21.1 × 23.9 × 13.6 in / 70.0 × 60.8 × 34.5 cm / 27.6 × 23.9 × 13.6 in	72 × 68 × 37 cm / 28.3 × 25.9 × 14.5 in	74 × 71 × 40 cm / 29.2 × 27.8 × 15.9 in
54 × 54 cm / 21.1 × 21.1 in / 70 × 54 cm / 27.6 × 21.1 in	72 × 62 cm / 28.3 × 24.4 in	74 × 67 cm / 29.2 × 26.4 in
68 kg / 149.9 lb / 99 kg / 218.3 lb	109 kg / 240.3 lb	139 kg / 286.6 lb
900 W / 1,650 W	1,650 W	1,650 W
<70 dB(A) / <56 dB(A)	<59 dB(A) with Rotor FA-6x50	<55 dB(A)
80 cm / 31.5 in	85 cm / 33.5 in	94 cm / 37 in
large, brightly lit LCD	VisioNize® touch interface	large, brightly lit LCD
200	200	368
56	68	108
6	–	–
56	68	108
32	36	52
28	36	52
100	120	196
80	104	148
80	84	80
4	6	8
4	4	4
4	4	4
–	4	–
–	–	4
16	20	28
4	8	8

epServices for premium performance

You will find detailed information on services for these products in the “Service Products” chapter.

Our Portfolio – Your Choice





Model	CR22N	CR30NX
Description	High-speed floorstanding centrifuge with high capacity, ideal for harvesting of biomass in up to 6 L per run. Refrigerated for temperature sensitive samples.	2-in-1 high-speed floorstanding centrifuge with vacuum function, suitable for applications with super-speed requirements up to 110,000 x g and large volumes. Refrigerated for temperature sensitive samples.
Page(s)	**76**	**80**
Capacity[1)]	up to 4 x 1.5 Liter	up to 4 x 1.5 Liter and continuous flow (>10 L)
Max. RCF	58,700 x g	110,000 x g
Max. speed	22,000 rpm	30,000 rpm
Temperature control range	-20 to 40°C	-20 to 40°C
Dimensions (WxDxH)	70 x 76 x 91.5 cm/ 27.5 x 30 x 36 in	70.8 x 89.2 x 86.6 cm/ 27.8 x 35.1 x 34 in
Height (with open lid)	151 cm/59.4 in	150 cm/59 in
Footprint (WxD)	70 x 76 cm/ 27.5 x 30 in	70.8 x 89.2 cm/ 27.8 x 35.1 in
Weight (w/o accessories)	260 kg/ 573.2 lbs	310 kg/ 683.4 lbs
Data export	Yes	Yes
Noise level (max.)	≤ 64 dB(A)	≤ 56 dB(A)
Display	5.7 inch color touch-sensitive LCD panel	6.5 inch color touch-sensitive LCD panel
Number of programs	33	1,000
Tracking of rotor usage	By serial number	By serial number
User management	yes	yes
Vacuum function	no	yes

[1)] Refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

Learn more about the Eppendorf centrifuge portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/centrifugation



CP100NX/ CP90NX/ CP80NX
Ultracentrifuge with a broad rotor portfolio. Three versions with shared functionality but different speed offerings are available to match your personal speed requirements.
84
up to 6 x 230 mL
803,000 x g/ 700,000 x g/ 615,000 x g
100,000 rpm/ 90,000 rpm/ 80,000 rpm
0 to 40°C
79 x 69 x 89 cm/ 31.1 x 27.1 x 35 in
88 cm/35 in
79 x 89 cm/ 31.1 x 35.0 in
390 kg/ 860 lbs
Yes
≤ 51 dB(A)
6.5 inch color touch-sensitive LCD panel
1,000
Rotor life management
yes
yes



CS150FNX
Floorstanding micro-ultracentrifuge with speeds of up to 1,050,000 x g in a very compact design.
86
up to 6 x 30 mL
1,050,000 x g
150,000 rpm
0 to 40°C
44 x 52 x 91 cm/ 17.3 x 20.5 x 35.8 in
91 cm/35.8 in
44 x 52 cm/ 17.3 x 20.5 in
105 kg/ 231 lbs
Yes
≤ 45 dB(A)
6.5 inch color touch-sensitive LCD panel
20
By serial number
yes
yes



CS150NX
Benchtop micro-ultracentrifuge with speeds of up to 1,050,000 x g, offering a flexible placement within the lab with standard electricity requirements and its compact design.
86
up to 6 x 30 mL
1,050,000 x g
150,000 rpm
0 to 40°C
59 x 58.2 x 40.8 cm/ 23.2 x 22.9 x 16 in
40.8 cm/16 in
59 x 58.2 cm/ 23.2 x 22.9 lbs
97 kg/ 214 lbs
Yes
≤ 45 dB(A)
6.5 inch color touch-sensitive LCD panel
20
By serial number
yes
yes

epServices
for premium performance

You will find detailed information on services for these products in the “Service Products” chapter.

MiniSpin®/MiniSpin® plus



Description
MiniSpin® and MiniSpin® plus are entry-level mini centrifuges that are powerful, easy-to-use and small enough to allow individual workstations to be equipped with a portable centrifuge.

Product features
> Rotor capacity: 12 × 1.5/2.0 mL vessels, 2 × 8-tube PCR strips
> Max. speed: 14,100 × g (14,500 rpm)
> Extremely compact footprint

Special features for MiniSpin plus
> Automatic rpm/rcf conversion
> Extended time to 99 min or continuous centrifugation

www.eppendorf.link/minispin



Rotor F-45-12-11
> for 12 x 1.5/2.0 mL tubes



Rotor F-55-16-5 PCR
> for 2 x PCR strips

Ordering information

Description	Order no.
Centrifuge MiniSpin®, keypad, non-refrigerated, with Rotor F-45-12-11, 230 V/50 – 60 Hz (EU)	5452000010
Centrifuge MiniSpin® plus, keypad, non-refrigerated, with Rotor F-45-12-11, 230 V/50 – 60 Hz (EU)	5453000015
Rotor F-45-12-11, angle 45°, 12 places, max. tube diameter 11 mm, incl. rotor lid and rotor nut, MiniSpin®/MiniSpin® plus	5452720008
Rotor F-55-16-5 PCR, angle 55°, 16 places, max. tube diameter 5 mm, incl. rotor lid (aluminum), MiniSpin®/MiniSpin® plus	5452727007
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5418 R



Description
Centrifuge 5418 R is an 18-place microcentrifuge that is specifically designed for low to medium capacity in 1.5/2.0 mL tubes and Microtainer®. The speed of up to 16,873 × g allows for standard molecular biology applications.

Product features
> Max. rotor capacity: 18 × 1.5/2.0 mL vessels
> Max. speed: 16,873 × g (14,000 rpm)
> Small footprint and low access height of 23 cm



Adapter for BD Microtainer® and 0.5 mL tubes
> The adapter can be used with every Eppendorf rotor for 1.5/2.0 mL tubes

www.eppendorf.link/centrifuge5418R



Rotor FA-45-18-11
> for 18 × 1.5/2.0 mL tubes, comes standard with unique Eppendorf QuickLock® aerosol-tight lid for fast and reliable locking



Adapter for 0.2 mL PCR Tubes
> Ideal to spin down PCR Tubes after reaction setup. Adapter fits in any Eppendorf 1.5/2.0 mL rotor

Ordering information

Description	Order no.
Centrifuge 5418 R, rotary knobs, refrigerated, with Rotor FA-45-18-11 and rotor lid, 230 V/50 – 60 Hz (EU)	5401000010
Rotor FA-45-18-11, aerosol-tight, 45° angle, 18 places, max. tube Ø 11 mm, incl. rotor lid (aluminum)	5418707005
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5420



Description
Centrifuge 5420 supports your nucleic acid purification and gel-extraction workflows. This centrifuge offers 24–place capacity in an aerosol-tight rotor and speeds up to 21,300 × g in a small footprint.

Product features
> Standard rotor for up to 24 x 1.5 and 2.0 mL tubes
> Rotor option for up to 32 x 0.2 mL PCR tubes or 4 x 8-place PCR strips
> Adapters for 0.2, 0.4 and 0.5 mL tubes as well as 0.6 mL BD Microtainer®

www.eppendorf.link/centrifuge5420



Rotor FA-24x2
> Max. speed: 21,300 × g (15,060 rpm)
> Max. capacity: 24 × 1.5/2.0 mL tubes
> Aerosol-tight



Rotor F-32x0.2-PCR
> Max. speed: 18,257 × g (15,060 rpm)
> Max capacity: 4 × PCR strips or 32 × PCR tubes (0.2 mL)

Ordering information

Description	Order no.
Centrifuge 5420, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5420000318
Centrifuge 5420, keypad, non-refrigerated, with aerosol-tight Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5420000113
Rotor F-32x0.2-PCR, incl. rotor lid, for 32 × 0.2 mL PCR tubes or 4 × 8 PCR tube strips, for 5420	5495404007
Rotor FA-24x2, aerosol-tight, incl. rotor lid, aerosol-tight, for 24 × 1.5/2.0 mL tubes, for 5420	5495400001
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5425/5425 R



Description
Eppendorf microcentrifuges 5425 and 5425 R are true laboratory standards. These whisper quiet 24-place microcentrifuges offer an outstanding set of features for a broad range of molecular and cell biology applications in Eppendorf and PCR tubes from 0.2 to 5 mL. The refrigerated Centrifuge 5425 R provides precise temperature control for processing temperature-sensitive samples with its advanced cooling system.

Product features
> Aerosol-tight Eppendorf QuickLock® lids for simple and safe handling
> Outstanding software features (e.g. adjustable acceleration and braking ramps, 3 program buttons (only Centrifuge 5425), short function without continuous pressing of the key)
> Extended rotor program (e.g. 5.0 mL rotor, swing-bucket rotor for PCR strips)

www.eppendorf.link/centrifuge5425-5425R

Main Features



Enhanced convenience
> One push short-spin key – no need to hold key all the while



Improved ergonomics
> Eppendorf QuickLock® rotors for ergonomic lid locking
> Closes with only a 1/4 turn and takes repetitive stress of your wrist



Increased versatility
> Swing-bucket rotor for divisible plates to speed up your PCR/qPCR setup
> 10-place 5.0 mL rotor for screw cap and snap lid tubes

Ordering information

Description	Order no.
Centrifuge 5425, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5405000310
Centrifuge 5425, rotary knobs, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5405000719
Centrifuge 5425, keypad, non-refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5405000115
Centrifuge 5425, rotary knobs, non-refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5405000514
Centrifuge 5425, rotary knobs, non-refrigerated, Molecular Biology Solution, with Rotor FA-18x2-Kit, 230 V/50 – 60 Hz (EU)	5405000174
Centrifuge 5425 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5406000313
Centrifuge 5425 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5406000712
Centrifuge 5425 R, keypad, refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5406000119
Centrifuge 5425 R, rotary knobs, refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5406000518

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Rotors for Centrifuge 5425/5425R



Rotors FA-24x2
> Max. speed: 21,300 × g (15,060 rpm)
> Max. capacity: 24 × 1.5/2.0 mL tubes
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor FA-24x2-PTFE
> Max. speed: 21,300 × g (15,060 rpm)
> Max. capacity: 24 × 1.5/2.0 mL tubes
> Aerosol-tight with Eppendorf QuickLock® lid
> PTFE coating for increased chemical resistance



Rotor FA-10x5
> Max. speed: 21,300 × g (15,060 rpm)
> Max capacity: 10 × Eppendorf Tubes® 5.0 mL
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor FA-18x2 Kit
> Max. speed: 18,565 × g (15,060 rpm)
> Rotor with higher edge for safe centrifugation of up to 18 spin columns
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor F-32x0.2-PCR
> Max. speed: 18,134 × g (15,060 rpm)
> for 4 × PCR strips or 32 × PCR tubes (0.2 mL)



Rotor 96x0.2-PCR
> Max. speed: 3,217 × g (6,000 rpm)
> Unique swing bucket rotor for 12 × 8 PCR strips 0.1/0.2 mL or 4 × 1/4 twin.tec® PCR plate 96, unskirted divisible or 96 × PCR tubes 0.2 mL

Ordering information

Description	Order no.
Rotor FA-24x2, aerosol-tight, incl. rotor lid, for 24 × 1.5/2.0 mL tubes	5495500006
Rotor FA-24x2-PTFE, aerosol-tight, incl. rotor lid, PTFE coated, for 24 × 1.5/2.0 mL tubes	5495503005
Rotor FA-10x5, aerosol-tight, incl. rotor lid, for 10 × 5.0 mL tubes (snap and screw cap)	5495505008
Rotor FA-18x2-Kit, aerosol-tight, incl. rotor lid, for 18 × 1.5/2.0 mL tubes or spin columns	5495508007
Rotor F-32x0.2-PCR, incl. rotor lid, for 32 × 0.2 mL PCR tubes or 4 × 8 PCR strips	5495510001
Rotor S-96x0.2-PCR, for 96 × 0.2 mL PCR tubes or 12 × 8 PCR strips, incl. buckets	5495512004
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Adapter, for 1 vessel 1.5 – 2.0 mL, for all 5.0 mL rotors, 4 pcs.	5820768002
Adapter, for 1 cryo tube, for all 5.0 mL rotors, 4 pcs.	5820769009
Adapter, for 1 HPLC tube, for all 5.0 mL rotors, 4 pcs.	5820770007
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008

Centrifuge 5427 R

New



Description
Eppendorf Centrifuge 5427 R is a high-speed, refrigerated microcentrifuge for high-throughput research. It doubles your tube capacity compared to a standard 24-place microcentrifuge thanks to its 48-place double-row rotor, while contributing to a more sustainable lab environment with its natural refrigerant.

Product features
> Cooled with natural refrigerant (R290) to protect your samples - and the planet
> Rotor capacity: 48 × 1.5/2.0 mL, 12 × 5.0 mL; Eppendorf QuickLock® rotor allows for fast and ergonomic lid locking
> Max. speed: 25,001 × g (16,220 rpm)

HYDROCARBON COOLING

www.eppendorf.link/centrifuge5427R

Ordering information

Description	Order no.
Centrifuge 5427 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5429000010
Centrifuge 5427 R, rotary knobs, refrigerated, with Rotor FA-45-30-11, 230 V/50 – 60 Hz (EU)	5429000310
Centrifuge 5427 R, rotary knobs, refrigerated, with Rotor FA-45-48-11, 230 V/50 – 60 Hz (EU)	5429000210

Ordering information for other voltage options can be found in the “Voltage Version” chapter.



Rotor S-24-11-AT
> Max. speed: 16,049 × g (12,700 rpm)
> Swing-bucket rotor for 24 × 1.5/2.0 mL tubes
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor FA-45-12-17
> Max. speed: 20,598 × g (14,000 rpm)
> Max capacity: 12 × Eppendorf Tubes® 5.0 mL
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor F-45-48-5-PCR
> Max. speed: 11,710 × g (10,500 rpm)
> PCR strip rotor for up to 48 × 0.2 mL PCR tubes

Rotor options continued on next page.

Rotors for Centrifuge 5427 R



Rotor F-45-48-11
> Max. speed: 18,213 × g (12,700 rpm)
> Max. capacity: 48 × 1.5/2.0 mL tubes



Rotor FA-45-48-11
> Max. speed: 18,213 × g (12,700 rpm)
> Max. capacity: 48 × 1.5/2.0 mL tubes
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor FA-45-30-11
> Max. speed: 20,817 × g (14,000 rpm)
> Max. capacity: 30 × 1.5/2.0 mL tubes
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor F-45-30-11
> Max. speed: 20,817 × g (14,000 rpm)
> Max. capacity: 30 × 1.5/2.0 mL tubes



Rotor FA-45-24-11
> Max. speed: 25,001 × g (16,220 rpm)
> Max. capacity: 24 × 1.5/2.0 mL tubes
> Aerosol-tight with Eppendorf QuickLock® lid



Rotor FA-45-24-11-Kit
> Max. speed: 19,090 × g (13,200 rpm)
> Rotor with higher rim for safe centrifugation of up to 24 spin columns
> Aerosol-tight with Eppendorf QuickLock® lid

Ordering information

Description	Order no.
Rotor FA-45-48-11, aerosol-tight, incl. rotor lid, for 5427R	5409710001
Rotor F-45-48-11, incl. rotor lid, aluminum	5409712004
Rotor FA-45-30-11, aerosol-tight, incl. rotor lid, aluminum	5409706004
Rotor F-45-30-11, incl. rotor lid, aluminum	5409708007
Rotor FA-45-24-11, aerosol-tight, incl. rotor lid, aluminum	5409702009
Rotor FA-45-24-11-Kit, aerosol-tight, incl. rotor lid, aluminum	5409704001
Rotor S-24-11-AT, aerosol-tight, stainless steel	5409715003
Rotor F-45-48-5-PCR, aluminum	5409714007
Rotor FA-45-12-17, aerosol-tight, incl. rotor lid, aluminum	5409700006
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Adapter, for 1 vessel 1.5 – 2.0 mL, for all 5.0 mL rotors, 4 pcs.	5820768002
Adapter, for 1 cryo tube, for all 5.0 mL rotors, 4 pcs.	5820769009
Adapter, for 1 HPLC tube, for all 5.0 mL rotors, 4 pcs.	5820770007
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008

Centrifuge 5430/5430 R



Description
Combine the best of both worlds with Centrifuge 5430 and 5430 R. These high-speed centrifuges have the small footprint of a microcentrifuge and the versatility of a multipurpose centrifuge.

Product features
> Max. rotor capacity: 48 × 1.5/2.0 mL, 6 × 50 mL, 2 × MTP
> Max. speed: 30,130 × g (17,500 rpm)
> Remarkable versatility with 12 different rotors

www.eppendorf.link/centrifuge5430

Ordering information

Description	Order no.
Centrifuge 5430, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5427000015
Centrifuge 5430, rotary knobs, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5427000610
Centrifuge 5430, keypad, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5427000210
Centrifuge 5430, rotary knobs, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5427000415
Centrifuge 5430, rotary knobs, non-refrigerated, Low-Throughput Plate Solution, with Rotor A-2-MTP, 230 V/50 – 60 Hz (EU)	5427000178
Centrifuge 5430 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5428000205
Centrifuge 5430 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5428000610
Centrifuge 5430 R, keypad, refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5428000010
Centrifuge 5430 R, rotary knobs, refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5428000410

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Rotors for Centrifuge 5430/5430 R



Rotor FA-45-48-11
> Max. speed: 18,210 × g (12,700 rpm)
> Max. capacity: 48 × 1.5/2.0 mL tubes
> Aerosol-tight for safe centrifugation of hazardous samples



Rotor F-45-48-11
> Max. speed: 18,210 × g (12,700 rpm)
> Max. capacity: 48 × 1.5/2.0 mL tubes



Rotor S-24-11-AT
> Max. speed: 16,049 × g (12,700 rpm)
> Swing-bucket rotor for 24 × 1.5/2.0 mL tubes
> Aerosol-tight with Eppendorf QuickLock® lid

Rotors for Centrifuge 5430/5430 R



Rotor FA-45-16-17
> Max. speed: 21,191 × g (14,200 rpm)
> Max. capacity: 16 × Eppendorf Tubes® 5.0 mL[1)]
> Aerosol-tight for safe centrifugation of hazardous samples

[1)] Snap cap - reduced capacity for 5 mL screw cap tubes



Rotor FA-45-30-11
> Max.speed: 25,000 × g (15,350 rpm)
> Max. capacity: 30 × 1.5/2.0 mL tubes
> Aerosol-tight for safe centrifugation of hazardous samples



Rotor FA-45-24-11-Kit
> Max. speed: 19,090 × g (13,200 rpm)
> Rotor with higher rim for safe centrifugation of up to 24 spin columns
> Aerosol-tight for safe centrifugation of hazardous samples



Rotor F-45-30-11
> Max. speed: 20,817 × g (14,000 rpm)
> Max. capacity: 30 × 1.5/2.0 mL tubes
> PTFE coating for increased chemical resistance



Rotor FA-45-24-11-HS
> Max.speed: 30,130 × g (17,500 rpm)
> Max. capacity: 24 × 1.5/2.0 mL tubes
> Extremely fast separation results
> Aerosol-tight for safe centrifugation of hazardous samples
> PTFE coating for increased chemical resistance



Rotor F-35-6-30
> Max. speed: 7,745 × g (7,830 rpm)
> Rotor for 6 × 15/50 mL conical or 12 × Vacutainer® tubes



Rotor A-2-MTP
> Max. speed: 2,204 × g (4,680 rpm)
> 2-place swing-bucket rotor for MTP, PCR and Deepwell Plates (max. 0.5 mL)
> Windshield design for quiet operation



Rotor F-45-64-5-PCR
> Max. speed: 13,543 × g (11,800 rpm)
> PCR strip rotor for up to 64 × 0.2 mL PCR tubes



Rotor F-45-18-17-Cryo
> Max. speed: 8,324 × g (8,900 rpm)
> 18-place rotor for Cryo tubes

Ordering information

Description	Order no.
Rotor FA-45-16-17, aerosol-tight, incl. rotor lid, for 16 × Eppendorf Tubes® 5.0 mL	5427750002
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Rotor FA-45-48-11, aerosol-tight, incl. rotor lid, for 5430/5430R	5427754008
Rotor F-45-48-11, incl. rotor lid	5427755004
Rotor S-24-11-AT, aerosol-tight, incl. rotor lid, stainless steel	5427757007
Rotor FA-45-30-11, aerosol-tight, incl. rotor lid, for 5430/5430R	5427753001
Rotor FA-45-24-11-Kit, aerosol-tight, incl. rotor lid	5427752005
Rotor F-45-30-11, incl. rotor lid, PTFE coated	5427712003
Rotor FA-45-24-11-HS, aerosol-tight, incl. rotor lid, PTFE coated	5427710000
Rotor F-35-6-30, incl. rotor lid, with 6 adapters each for 15 mL/50 mL conical tubes	5427716009
Rotor A-2-MTP, incl. wind shield and rotor lid, with 2 buckets	5427700005
Rotor F-45-64-5-PCR, incl. rotor lid and adapters	5427714006
Rotor F-45-18-17-Cryo, incl. rotor lid and cryovial adapters	5427705007
Adapter, for 1 cryo tubes (max. Ø 13 mm) or sealable centrifugation tubes (Ø 12.2 mm), max. length 50 mm, for Rotor F-45-18-17-Cryo, 6 pcs.	5702752002
Adapter, for 1 vessel 1.5 – 2.0 mL, for all 5.0 mL rotors, 4 pcs.	5820768002
Adapter, for 1 cryo tube, for all 5.0 mL rotors, 4 pcs.	5820769009
Adapter, for 1 HPLC tube, for all 5.0 mL rotors, 4 pcs.	5820770007
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008
Adapter, for 1 HPLC vessel 1.5 mL, for Rotor F-45-18-17-Cryo, 18 pcs.	5427708006

Adapter options for Rotor F-35-6-30

Adapter	Rotor capacity[3]	Max. tube dimensions Ø x L	Max. RCF	For bore hole	Order no.[4]
13 mm round	12	13 × 65 – 89 mm	6,443 × g	small	5427740007
			6,100 × g	large	5427742000
13 mm round	12	13 × 90 – 110 mm	7,471 × g	small	5427741003
			7,129 × g	large	5427743006
16 mm round	12	16 × 75 – 105 mm	7,005 × g	small	5427732004
		16 × 90 – 105 mm	7,005 × g	large	5427734007
17 mm round	12	17 × 90 – 125 mm	7,745 × g	small	5427735003
			7,403 × g	large	5427738002
Eppendorf Tubes® 5.0 mL	12	17.5 × 80 mm	6,237 × g	small	5427746005
		17.5 × 80 mm	7,129 × g	large	5427747001
15 mL conical	6	17.5 × 100 – 125 mm	7,540 × g	small	5427726004
30 mL round	6	26 × 92 – 112 mm	7,087 × g	large	5427736000
50 mL round	6	29 × 95 – 125 mm	7,581 × g	large	5427737006
50 mL conical	6[1] [2]	29.5 × 100 – 125 mm	7,197 × g	large	5427727000
Centriprep®	6	29.5 × 100 – 125 mm	7,567 × g	large	5427723005

[1] Three sets of 2 included with Rotor F-35-6-30. [2] Adapter accommodates skirted 50 mL conical tubes. [3] Please perform a manual test to determine the actual loading capacity. [4] Set of 2

Centrifuge 5702/5702 R/5702 RH







www.eppendorf.link/centrifuge5702

Ordering information

Description	Order no.
Centrifuge 5702, rotary knobs, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5702000010
Centrifuge 5702, rotary knobs, non-refrigerated, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5702000320
Centrifuge 5702 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5703000010
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 13/16 mm blood collection tubes, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5703000320
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5703000425
Centrifuge 5702 RH, rotary knobs, refrigerated/heated, without rotor, 230 V/50 – 60 Hz (EU)	5704000010
Centrifuge 5702, rotary knobs, non-refrigerated, with Rotor A-4-38 incl. adapters for round-bottom tubes 4 – 10 mL and adapters for round-bottom tubes 2.6 – 7 mL, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5702000515

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Adapters for Rotor A-4-38 with round buckets						
Tube Volume	1.5 – 2.0 mL	1 – 1.4 mL	2 – 7 mL	2.6 – 7 mL	4 – 10 mL	Eppendorf Tubes® 5.0 mL
Max. tube diameter	11 mm	8.5 mm	12.5 mm	13.5 mm	16 mm	17 mm
Max. vessel height	43 mm	100 mm	100 mm	100 mm	100 mm	60 mm
Max. vessel height for use with cap/lid[1]	43 mm	100 mm	100 mm	100 mm	100 mm	60 mm
Adapter						
Number of vessels per adapter/rotor	4/16	5/20	5/20	4/16	4/16	1/4
Bottom shape	round	flat	flat	flat	flat	flat
Centrifugation radius	134 mm	132 mm	132 mm	132 mm	132 mm	136 mm
Max. RCF	2,900 × g	2,850 × g	2,850 × g	2,850 × g	2,850 × g	2,943 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5702745006	5702736007	5702737003	5702719005	5702735000	5702733008

[1] Exceeding the maximum tube length may reduce the loading capacity of the rotor. Please perform a manual swing-out test before starting the centrifuge run to make sure the tubes do not hit the rotor yoke.
[2] Please order adapter for 25 mL conical tubes screw cap 5820734000.[3] Please order adapter for 25 mL conical tubes snap cap 5820733004.

Description

Are you looking to improve your work environment? The 5702 family of low-speed centrifuges are quiet in operation, compact in design and provide six different rotor options to accommodate any type of tube and requirement for low to mid-throughput applications in immunology research and cell culture.












Rotor A-4-38 with round buckets

> Maximum speed: 3,000 × g (4,400 rpm)
> Standard rotor for centrifugation of blood collection tubes or 15/50 mL conical tubes
> Round buckets for vessels with 1.5 – 100 mL

Ordering information

Description	Order no.
Rotor A-4-38 with round buckets, 8 positions, max. Ø 38 mm, incl. 4 round buckets 100 mL	5702720003
16 x 125 mm bucket, for 16 x 125 mm round bottom tubes, non aerosol-tight, for rotor A-4-38, 4 pcs.	5702764000
Rotor A-4-38, 8 positions, max. Ø 38 mm, without buckets	5702740004
Round bucket 100 mL, for Rotor A-4-38, 4 pcs.	5702722006
Caps for 100 mL round buckets, aerosol-tight, 2 pcs.	5702721000



							
9 – 15 mL	15 mL conical	15 mL conical	25 mL	25 mL screw cap[2)]	25 mL snap cap[3)]	50 mL screw cap	85/100 mL
17.5 mm	17.2 mm	17.2 mm	39 mm	30 mm	30 mm	30 mm	38 mm
100 mm	121 mm	121 mm		78.5 mm	83 mm	115 mm	106 mm
100 mm	120 mm	–		78.5 mm	83 mm	115 mm	106 mm
							
4/16	1/4	2/8	1/4	1/4	1/4	1/4	1/4
round	conical	conical	conical		conical		round
130 mm	137 mm	137 mm		97 mm	107 mm	135 mm	135 mm
2,800 × g	3,000 × g	3,000 × g		2,100 × g	2,316 × g	2,900 × g	2,900 × g
2 pcs.	2 pcs.	2 pcs.	2 pcs.		2 pcs.		2 pcs.
5702724009	5702732001	5702723002	5702717002		5702734004		5702718009

Rotors for Centrifuge 5702/5702 R/5702 RH



Rotor A-4-38 with rectangular buckets

> Maximum speed: 2,750 × g (4,400 rpm)
> Rectangular buckets for vessels with 5 – 25 mL
> Autoclavable rotor-cross and buckets

Adapters for Rotor A-4-38 with rectangular buckets						
Tube Volume	round-bottom tubes	5 – 7 mL	9 mL	15 mL	25 mL	20 mL
Max. tube diameter	12 mm	13 mm	14.5 mm	17.5 mm	25 mm	22 mm
Max. vessel height	75 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Adapter						
Number of vessels per adapter/rotor	9/36	10/40	8/32	6/24	2/8	4/16
Bottom shape	round	flat	flat	flat	flat	flat
Centrifugation radius	119 mm	127 mm	127 mm	127 mm	127 mm	127 mm
Max. RCF	2,577 × g	2,750 × g	2,750 × g	2,750 × g	2,750 × g	2,750 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5702763004	5702710008	5702711004	5702712000	5702716006	5702713007

Ordering information

Description	**Order no.**
Rotor A-4-38, 8 positions, max. Ø 38 mm, without buckets	5702740004
Rectangular bucket 90 mL, for Rotor A-4-38, 4 pcs.	5702709000



Rotor A-8-17
> Maximum speed: 2,800 × g (4,400 rpm)
> Low capacity rotor for centrifugation of 15 mL conical tubes or 15 mL glass tubes[1)]
> Adapters for 15 mL conical tubes and rubber mat inserts for glass tubes optionally available

[1)] Max. vessel height: 120 mm



Rotor F-35-30-17
> Maximum speed: 2,750 × g (4,400 rpm)
> High capacity rotor for 20 × 15 mL conical tubes or 30 × 15 mL glass tubes
> Inserts for 15 mL conical tubes and rubber mats for use with glass tubes are included



Rotor F-45-24-11
> Maximum speed: 1,770 × g (4,400 rpm)
> Fixed-angle rotor for 24 × 1.5/2.0 mL tubes
> Quiet centrifugation even without rotor lid
> Adapters optionally available for:
  - 0.2 mL PCR tubes (5425715005)
  - 0.4 mL centrifuge tubes (5425717008)
  - 0.5 mL micro test tubes and BD Microtainer® tubes (5425716001)
> Rotor and adapters are autoclavable (121 °C, 20 min)



Rotor F-45-18-17-Cryo
> Maximum speed: 1,970 × g (4,400 rpm)
> Quiet centrifugation even without rotor lid
> Centrifugation of 1 – 2 mL cryo container (max. 13 mm Ø, use with adapter) and tubes with screw cap (max. 17 mm Ø, no adapter required)
> Rotor and adapters are autoclavable (121 °C, 20 min)

Ordering information

Description	Order no.
Rotor A-8-17, 8 × 15 mL, without adapter, without rubber mats	5702700002
Rotor F-35-30-17, incl. 30 steel sleeves for 15 mL vessels, with 20 adapters for conical tubes and 30 rubber mats	5702704008
Rotor F-35-30-17, incl. 10 steel sleeves for 15 mL vessels, with 10 adapters for conical tubes and 10 rubber mats	5702705004
Rotor F-45-24-11, 45° angle, 24 places, max. Ø 11 mm, without lid	5702746002
Rotor F-45-18-17-Cryo, without rotor lid, without adapters	5702747009
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Adapter, for 1 cryo tubes (max. Ø 13 mm) or sealable centrifugation tubes (Ø 12.2 mm), max. length 50 mm, for Rotor F-45-18-17-Cryo, 6 pcs.	5702752002
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008
Adapter, for 1 HPLC vessel 1.5 mL, for Rotor F-45-18-17-Cryo, 18 pcs.	5427708006

Centrifuge 5804/5804 R and 5810/5810 R



Centrifuge Packages 58xx Family







www.eppendorf.com/centrifuge5810

Description
Whether you need a refrigerated or non-refrigerated centrifuge for low or medium throughput applications, one of these packages will definitely suit your requirements.

Cell Culture Centrifuge packages include
> Centrifuge 5702/5702 R, 5804/5804 R or 5810/5810 R
> Swing-bucket rotor incl. buckets
> Four adapters for 15 mL conical tubes (two sets of 2)
> Four adapters for 50 mL conical tubes (two sets of 2)

Centrifuge packages for round-bottom tubes include
> Centrifuge 5810/ 5810 R
> Swing-bucket rotor S-4-104 incl. buckets
> Four adapters for 13 mm (5/7 mL) round bottom tubes (two sets of 2)
> Four adapters for 16 mm (10 mL) round bottom tubes (two sets of 2)

Eppendorf Conical Tubes 15 mL, 25 mL and 50 mL
The Eppendorf Conical Tubes are the optimal solution for sample preparation protocols in microbiology and molecular biology laboratories. Safe design and easy handling ensure best sample processing.

Premium raw material ensures
> Highest sample integrity
> High g-Safe® centrifugation stability
> Optimal sample and pellet visibility

For more information go to chapter “tubes and plates”.

Ordering information

Description	Order no.
Centrifuge 5804, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5804000010
Centrifuge 5804 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5805000010
Centrifuge 5810, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5810000010
Centrifuge 5810 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5811000015

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

	Number of vessels per adapter/rotor	
Centrifuge Packages 58xx Family	**15 mL conical**	**50 mL conical**
5702/5702 R	2/8	1/4
5804/5804 R + Rotor A-4-44	4/16	1/4
5804/5804 R + Rotor S-4-72	8/32	4/16
5810/5810 R + Rotor A-4-62	9/36	4/16
5810/5810 R + Rotor A-4-81	12/48	5/20
5810/5810 R + Rotor S-4-104	14/56	7/28
	13 mm	16 mm
5810/5810 R + S-4-104	23/92	20/80

Ordering information

Description	Conical tubes	Order no.
Centrifuge 5804, keypad, non-refrigerated, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	16 × 15 mL/4 × 50 mL	5804000320
Centrifuge 5804 R, keypad, refrigerated, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	16 × 15 mL/4 × 50 mL	5805000320
Centrifuge 5804, keypad, non-refrigerated, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	32 × 15 mL/16 × 50 mL	5804000520
Centrifuge 5804 R, keypad, refrigerated, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	32 × 15 mL/16 × 50 mL	5805000620
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	36 × 15 mL/16 × 50 mL	5810000320
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	36 × 15 mL/16 × 50 mL	5811000325
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	48 × 15 mL/20 × 50 mL	5810000420
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	48 × 15 mL/20 × 50 mL	5811000420
Centrifuge 5810, keypad, non-refrigerated, Classic Cell Culture Solution, with Rotor S-4-104 including 4 adapters for 5/15 mL tubes and 4 adapters for 50 mL conical tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL	5810000525
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL	5811000620
Centrifuge 5810, keypad, non-refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL 92 × 13 mm/80 × 16 mm	5810000620
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL 92 × 13 mm/80 × 16 mm	5811000820

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Overview of Swing-Bucket Rotors Centrifuge 58xx Family







Model	Rotor S-4-104	Rotor A-4-81	Rotor A-4-62
Max. capacity 5804/5804 R	4 × 750 mL	4 × 500 mL	4 × 250 mL
5810/5810 R	■	■	■
Description	Medium capacity swing-bucket rotor for blood, bacteria, cell culture and plate centrifugation	Medium capacity swing-bucket rotor for blood, bacteria, cell culture and plate centrifugation	Economic swing-bucket rotor for blood, bacteria, cell culture and plate centrifugation
Aerosol-tightness tubes/plates	yes/yes	yes/no	yes/no
Max. RCF	3,214 × g	3,220 × g	3,220 × g
Max. speed	3,900 rpm	4,000 rpm	4,000 rpm
Eppendorf Tubes® 5.0 mL and 15 mL conical	56	48	36
25 mL snap cap tubes	24	20	12
25 mL screw cap tubes	28	20	12
50 mL conical tubes	28	20/28[1)]	16
13 mm round-bottom and blood collection tubes	92	100	60
16 mm round-bottom and blood collection tubes	80	64	48
1.5/2.0 mL micro tube	200	80	64
PCR plates/MTP	16	16	16
Deepwell plates (DWP)	4	4	4

[1)] Maximum capacity with dedicated bucket/adapter.[2)] Maximum capacity with dedicated 50 mL bucket.

Overview of Fixed-Angle Rotors Centrifuge 58xx Family





Model	Rotor F-34-6-38	Rotor FA-45-6-30
Max. capacity 5804/5804 R	6 × 85 mL ■	6 × 50 mL ■
5810/5810 R	■	■
Description	High-speed rotor suitable for molecular applications in tubes up to 85 mL	Aerosol-tight high-speed rotor for safe centrifugation of hazardous samples
Aerosol-tightness	no	yes
Max. RCF	18,514 × g	20,133 × g
Max. speed	12,000 rpm	12,100 rpm
1.5/2.0 mL micro tube	24	–
Eppendorf Tubes® 5.0 mL and 15 mL conical	6	6
50 mL conical tubes	6	6
25 mL conical tubes	6[1)2)]	6[2)3)]
85 mL Oakridge tubes	6	–

[1)] Screw cap tubes only.[2)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[3)] Please order adapter for 25 mL conical tubes snap cap 5820733004.



Rotor S-4-72
4 × 250 mL
■
■
Economic swing-bucket rotor for blood, bacteria, cell culture centrifugation
no/–
3,234 × g
4,200 rpm
32
16
16
16
56
52
104
–
–



Rotor A-4-44
4 × 100 mL
■
■
High-speed swing-bucket rotor for platelet poor plasma, blood, bacteria and cell culture
yes/–
4,500 × g
5,000 rpm
16
4
4
4/8[2)]
36
28
48
–
–



Rotor A-2-DWP-AT
2 × 4 MTP, 2 × 1 DWP
■
Aerosol-tight deepwell plate rotor for safe centrifugation of hazardous samples.
–/yes
3,486 × g
4,500 rpm
–
–
–
–
–
–
48
8
2



Rotor A-2-DWP
2 × 4 MTP, 2 × 2 DWP
■
■
Economic deepwell plate rotor
–/no
2,250 × g
3,700 rpm
–
–
–
–
–
–
48
8
4



Rotor FA-45-20-17
20 × 5.0 mL
■
■
Aerosol-tight applications in Eppendorf Tubes® 5.0 mL
yes
20,913 × g
13,100 rpm
20
20/-
–
–
–



Rotor FA-45-48-11
48 × 1.5/2.0 mL
■
■
Aerosol-tight microcentrifuge tube rotor for safe centrifugation of hazardous samples
yes
19,083 × g
13,000 rpm
48
–
–
–
–



Rotor F-45-30-11/Rotor FA-45-30-11
30 × 1.5/2.0 mL
■
Microcentrifuge tube rotor
no/yes
20,817 × g
14,000 rpm
30
–
–
–
–

Rotors for Centrifuge 58xx Family







Model	Rotor F-35-48-17[1)]	Rotor T-60-11	Rotor F-45-48-PCR
Max. capacity		60 × 1.5/2.0 mL	6 × 5/8 PCR strips (48 x 0.2 mL)
5804/5804 R	■		■
5810/5810 R	■	■	■
Aerosol-tightness	no	no	no
Max. RCF	5,005 × g	16,435 × g	15,294 × g
Max. speed	5,500 rpm	14,000 rpm	12,000 rpm
1.5/2.0 mL micro tube	–	60	–
Eppendorf Tubes® 5.0 mL and 15 mL conical	-/40	–	–

[1)] Please note that a software upgrade will be necessary for older centrifuges when using this rotor. Please contact your local Eppendorf organization or dealer for further information.

Ordering information

Description	Order no.
Rotor FA-45-20-17, incl. rotor lid, for 20 Eppendorf Tubes® 5.0 mL	5820765003
Adapter, for 1 vessel 1.5 – 2.0 mL, for all 5.0 mL rotors, 4 pcs.	5820768002
Adapter, for 1 cryo tube, for all 5.0 mL rotors, 4 pcs.	5820769009
Adapter, for 1 HPLC tube, for all 5.0 mL rotors, 4 pcs.	5820770007
Rotor FA-45-48-11, aerosol-tight, incl. rotor lid, for 48 × 1.5/2.0 mL tubes	5820760001
Rotor F-45-30-11, incl. rotor lid, for 30 × 1.5/2.0 mL reaction vessels	5804715004
Rotor FA-45-30-11, aerosol-tight, incl. rotor lid, for 30 × 1.5/2.0 mL reaction vessels	5804726006

Ordering information

Description	Order no.
Rotor F-35-48-17, for 24 × 15 mL conical tubes, incl. 24 steel sleeves and adapters	5820771003
Rotor F-35-48-17, for 40 × 15 mL conical tubes, incl. 48 steel sleeves and adapters	5820772000
Rotor T-60-11, incl. rotor lid, for 1.5/2.0 mL tubes, without adapter	5804730003
Adapter, for 10 reaction vessels 1.5/2.0 mL, for Rotor T-60-11, 6 pcs.	5804731000
Adapter, for 20 reaction vessels 0.4 mL, for Rotor T-60-11, 6 pcs.	5804732006
Rotor F-45-48-PCR, for 6 × 8, 6 × 5 PCR tube strips, 48 × 0.2 mL individual PCR tubes	5804735005



Rotor A-2-DWP

> For use in Centrifuge 5804/5804 R and 5810/5810 R
> Max. speed: 2,250 × g (3,700 rpm)
> Rotor can handle up to
- 2 × 4 MTP
- 2 × 4 Cell culture plates
- 2 × 2 DWP
- 2 × 1 Filtration plate kits




Rotor A-2-DWP-AT

> For use in Centrifuge 5810/5810 R only[1)]
> Max. speed: 3,486 × g (4,500 rpm)
> Rotor can handle up to
- 2 × 4 MTP
- 2 × 1 DWP
- 2 × 1 Filtration plate kits
- 2 × 2 Cell culture plates

[1)] Please note that a software upgrade may be necessary for older centrifuges when using Rotor A-2-DWP-AT. Please contact your local Eppendorf organization or dealer for further information.

Ordering information

Description	Order no.
Rotor A-2-DWP, for Deepwell plates, incl. 2 buckets	5804740009
Rotor A-2-DWP-AT, incl. 2 buckets, 2 aerosol-tight caps and 2 plate carriers	5820710004

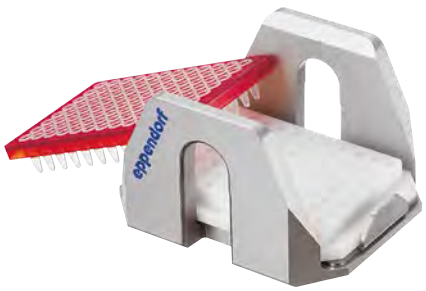

PCR plate adapter

> Adapter is designed to support thin-walled PCR plate wells during centrifugation
> Available for 96-well and 384-well PCR plates
> Can be used in all Eppendorf plate rotors



Cell culture flask adapter

> Adapter to spin down cell cultures directly in a cell culture flask
> Suitable for 25 cm^2 and selective 75 cm^2 flasks (please ask for details)
> Can be used in Eppendorf plate rotor A-4-81-MTP/Flex



IsoRack adapter

> IsoRack adapters to support 1.5/2.0 mL IsoRacks during centrifugation
> Can be used in Eppendorf plate rotors A-2-DWP and A-4-81-MTP/Flex

Ordering information

Description	Order no.
Adapter, for 1 cell culture flask, for Rotors A-4-81-MTP/Flex	5825719000
Adapter, for 1 PCR plate (96 wells), for 96-well PCR plates, used in A-4-81-MTP/Flex, A-4-62-MTP, A-2-DWP-AT and A-2-DWP, 2 pcs.	5825711009
Adapter, for 1 PCR plate (384 wells), for 384-well PCR plates, used in A-4-81-MTP/Flex, A-4-62-MTP, A-2-DWP-AT and A-2-DWP, 2 pcs.	5825713001
IsoRack adapter, for 24 vessels in the IsoRack 1.5/2.0 mL, for Rotor A-4-81 (MTP), for Rotor A-2-DWP-AT, for 24 × 1.5/2.0 mL tubes in the IsoRack, 2 pcs.	5825709004
CombiSlide Adapter, for 12 slides Combi Slide, for Rotors A-2-MTP and A-4-81 (MTP), 2 pcs.	5825706005












Rotors for Centrifuge 5810 and 5810 R



Rotor S-4-104

> Medium capacity swing-bucket rotor with max. speed 3,214 × g (3,900 rpm)[1)]
> Broad range of adapters enables high versatility for tubes and bottles from 0.2 mL to 750 mL and plates
> Aerodynamic round bucket design for up to 36 % energy savings compared to Rotor A-4-81


[1)] Please note that a software upgrade may be necessary for older centrifuges when using this rotor. Please contact your local Eppendorf organization or dealer for further information.

Adapters for Rotor S-4-104							
Tube Volume	1.5/2.0 mL	12 × 75 mm, 5 mL FACS	2.6 – 8 mL	5.5 – 12 mL	9 mL	14 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical
Max. tube diameter	11 mm	12 mm	13 mm	16 mm	17.5 mm	17.5 mm	17 mm
Max. vessel height	39 mm	115 mm	115 mm	119 mm	111 mm	117 mm	125 mm
Max. vessel height for use with cap/lid[1)]	39 mm	108 mm	108 mm	114 mm	106 mm	112 mm	121 mm
Adapter							
Number of vessels per adapter/rotor	50/200	27/108	23/92	20/80	20/80	14/56	14/56
Bottom shape	flat	round	round	round	round	round	conical
Centrifugation radius	188 mm	183 mm	179 mm	180 mm	179 mm	185 mm	188 mm
Max. RCF	3,197 × g	3,112 × g	3,044 × g	3,061 × g	3,044 × g	3,146 × g	3,197 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5825740009	5825747003	5825738004	5825736001	5825743008	5825748000	5825734009

[1)] Exceeding the maximum tube length may reduce the loading capacity of the rotor. Please perform a manual swing-out test before starting the centrifuge run to make sure the tubes do not hit the rotor yoke. [2)] Please order adapter for 25 mL conical tubes snap cap 5820733004.[3)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[4)] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer. [5)] 225 mL conical bottles from BD®/Corning® and 250 mL conical bottles from Nunc® for Rotor S-4-104 and S-4x750.


Ordering information

Description	Order no.
Rotor S-4-104	
incl. 4 × 750 mL round buckets	5820740000
aerosol-tight capable, incl. 4 plate buckets	5820754001
without buckets	5820755008
Inlay for microfluidic card, for Rotor S-4-104, 4 pcs.	5820751002
Plate carrier, Rotoren S-4-104, S-4x750, 2 pcs.	5820756004
Plate bucket, for Rotor S-4-104, aerosol-tight capable, incl. plate carrier, 2 pcs.	5820744006
Plate bucket, for Rotor S-4-104, aerosol-tight capable, incl. plate carrier, 4 pcs.	5820743000
Plate bucket (open), for Rotor S-4-104, incl. plate carrier, 4 pcs.	5820757000
Round bucket 750 mL, for Rotor S-4-104, 2 pcs.	5820742003
Round bucket 750 mL, for Rotor S-4-104, aerosol-tight capable, 4 pcs.	5820741007
Caps, rotors S-4-104, S-4x750, plate bucket, aerosol-tight, 2 pcs.	5820748001
Caps for 750 mL/1000 mL, for rotors S-4-104, S-4x750, S-4x1000, aerosol-tight, 2 pcs.	5820747005
Wide-neck bottle 750 mL, for Rotors S-4-104, S-4x750, S-4x1000, 2 pcs.	5820708000










25 mL snap cap[2]	25 mL screw cap[3]	50 mL screw cap	45 mL snap cap	30 mL	50 mL conical, skirted	250 mL flat, 175 – 225/250 mL conical[4][5]	500 mL Corning®	750 mL
30 mm	30 mm	30 mm	30 mm	25 mm	30 mm	62 mm	96 mm	102 mm
83 mm	78.5 mm	122 mm	122 mm		120 mm	145 mm	147 mm	140 mm
83 mm	78.5 mm	116 mm	116 mm		116 mm	125 mm	–	–
6/24	7/28	7/28	6/24	8/32	5/20	1/4	1/4	1/4
	conical			flat	conical, skirted	flat	conical	flat
161 mm	151 mm	187 mm	187 mm		178 mm	183 mm	187 mm	185 mm
2,737 × g	2,567 × g	3,180 × g	3,180 × g		3,027 × g	3,112 × g	3,180 × g	3,146 × g
2 pcs.				2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
5825733002				5825755006	5825732006	5825741005	5825745000	5825744004

Rotors for Centrifuge 5810 and 5810 R



Rotor A-4-81

> Swing-bucket rotor with max. speed 3,220 × g (4,000 rpm)
> Rotor A-4-81 accommodates tubes and bottles from 0.2 mL to 500 mL as well as plates
> Aerosol-tight caps[1] for safe centrifugation of hazardous samples optionally available









[1] Aerosol-tightness tested by Public Health England, Porton Down, UK.

Adapters for Rotor A-4-81									
Tube Volume	1.5/2.0 mL	1.2 – 5 mL	2.6 – 5 mL	2.6 – 7 mL	3 – 15 mL	7 – 17 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical tubes	25 mL snap cap	25 mL screw cap
Max. tube diameter	11 mm	11 mm	13 mm	13 mm	16 mm	17.5 mm	17 mm	30 mm	30 mm
Max. vessel height	43 mm	108 mm	108 mm	108 mm	108 mm	118 mm	121 mm	83 mm	78.5 mm
Max. vessel height for use with cap/lid[1]	43 mm	108 mm	107 mm	108 mm	108 mm	118 mm	121 mm	116 mm	78.5 mm
Adapter									
Number of vessels per adapter/rotor	20/80	20/80	25/100	18/72	16/64	16/64	12/48	5/20	5/20
Bottom shape	flat	flat	flat with rubber mat	flat with rubber mat	flat with rubber mat	flat with rubber mat	conical	conical	
Centrifugation radius	165 mm	168 mm	168 mm	168 mm	168 mm	168 mm	173 mm	158 mm	148 mm
Max. RCF	2,950 × g	3,000 × g	3,000 × g	3,000 × g	3,000 × g	3,000 × g	3,100 × g	2,826 × g	2,647 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	
Order no.	5810745004	5810746000	5810720001	5810747007	5810748003	5810721008	5810722004	5810723000	

[1] Exceeding the maximum tube length may reduce the loading capacity of the rotor. Please perform a manual swing-out test before starting the centrifuge run to make sure the tubes do not hit the rotor yoke.
[2] Please order adapter for 25 mL conical tubes snap cap 5820733004.[3] Please order adapter for 25 mL conical tubes screw cap 5820734000.[4] Please order adapter for 50 mL conical tubes skirted 5804737008 or 022654373 for U.S. and Canada.[5] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.

Ordering information

Description	Order no.
Rotor A-4-81, for 500 mL rectangular buckets or MTP/Flex buckets, incl. 4 x 500 mL rectangular buckets	5810718007
Rotor A-4-81, without buckets	5810743001
Rotor A-4-81-MTP/Flex, Swing-bucket rotor, incl. 4 MTP/Flex buckets	5810725003
Bucket for 7 × 50 mL conical tubes, for Rotor A-4-81, 4 pcs.	5825730003
Rectangular bucket 500 mL, for Rotor A-4-81, 4 pcs.	5810730007
Cap, aerosol-tight, for 500 mL rectangular bucket, 2 pcs.	5810724007
Wide-neck bottle 500 mL, for Rotors A-4-81, S-4x500, rectangular, 2 pcs.	5820707003
Wide-neck bottle 400 mL, for Rotors A-4-81, S-4x500, 400 mL, lid blue, 2 pcs.	5810729009
MTP/Flex buckets, for Rotors A-4-81, S-4x500, for use with IsoRack and cell culture flask adapters as well as MTP and DWP, 2 pcs.	5810742005
MTP/Flex buckets, for Rotors A-4-81, S-4x500, for use with IsoRack and cell culture flask adapters as well as MTP and DWP, 4 pcs.	5810741009

										
50 mL screw cap	45 mL snap cap	25 mL snap cap[2]	25 mL screw cap[3]	50 mL screw cap	45 mL snap cap	30 – 50 mL round-bottom/50 mL conical, skirted[4]	180 – 250 mL flat/ 175 – 225 mL conical[5]	400 mL	500 mL	MTP, DWP, PCR plates
30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	62 mm	133 mm	83 mm	–
122 mm	122 mm	83 mm	78.5 mm	122 mm	122 mm	121 mm	133 mm	133 mm	134 mm	60 mm
116 mm	116 mm	–	–	–	–	–	–	–	134 mm	–
										
5/20	5/20	7/28	7/28	7/28	7/28	5/20	1/4	1/4	–/4	4/16 (MTP) 1/4 (DWP)
conical			conical			flat with rubber mat	flat with rubber mat	flat, rubber	flat	flat with rubber mat
173 mm	173 mm	155 mm	145 mm	180 mm	180 mm	173 mm	173 mm	180 mm	180 mm	163 mm
3,100 × g	3,100 × g	2,772 × g	2,593 × g	3,220 × g	3,220 × g	3,100 × g	3,100 × g	3,220 × g	3,220 × g	2,900 × g
2 pcs.		4 pcs.				2 pcs.	2 pcs.	2 pcs.		2 pcs.
5810723000		5825730003				5810739004	5825722000	5810728002	–	5810742005

Rotors for Centrifuge 5810 and 5810 R



Rotor A-4-62

> Swing-bucket rotor with max. speed 3,220 × g (4,000 rpm)
> Rotor A-4-62 accommodates tubes and bottles from 0.2 mL to 250 mL as well as plates
> Aerosol-tight caps[1] for safe centrifugation of hazardous samples optionally available














[1] Aerosol-tightness tested by Public Health England, Porton Down, UK.

Adapters for Rotor A-4-62								
Tube Volume	1.5 – 2.0 mL	1.2 – 5 mL	2.6 – 7 mL	3 – 15 mL	7 – 17 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical	7 – 18 mL	18 – 25 mL
Max. tube diameter	11 mm	11 mm	13 mm	16 mm	17.5 mm	17 mm	20 mm	26 mm
Max. vessel height	43 mm	123 mm	121 mm	121 mm	118 mm	127 mm	126 mm	119 mm
Max. vessel height for use with cap/lid[1]	43 mm	115 mm	118 mm	116 mm	114 mm	121 mm	119 mm	116 mm
Adapter								
Number of vessels per adapter/rotor	16/64	25/100	15/60	12/48	12/48	9/36	8/32	4/16
Bottom shape	flat	flat with rubber mat	flat with rubber mat	flat with rubber mat	flat with rubber mat	conical	flat with rubber mat	flat with rubber mat
Centrifugation radius	171 mm	173 mm	173 mm	173 mm	173 mm	178 mm	173 mm	173 mm
Max. RCF	3,000 × g	3,050 × g	3,050 × g	3,050 × g	3,050 × g	3,150 × g	3,050 × g	3,050 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5810751004	5810750008	5810752000	5810753007	5810754003	5810755000	5810756006	5810757002

[1] Exceeding the maximum tube length may reduce the loading capacity of the rotor. Please perform a manual swing-out test before starting the centrifuge run to make sure the tubes do not hit the rotor yoke.
[2] Please order adapter for 50 mL conical tubes skirted 5804 737008.

Ordering information

Description	Order no.
Rotor A-4-62, incl. 4 × 250 mL rectangular buckets	5810709008
Rotor A-4-62-MTP, with 4 MTP buckets	5810711002
MTP bucket for Rotor A-4-62, for 4 MTP or 1 DWP, 4 pcs.	5810702003
Caps, for rectangular bucket 250 mL, aerosol-tight, 2 pcs.	5810710006
Rectangular bucket 250 mL, for Rotor A-4-62, 4 pieces	5810716004

										
25 mL snap cap	25 mL screw cap	50 mL screw cap	45 mL snap cap	50 mL screw cap	45 mL snap cap	30 – 50 mL round-bottom/ 50 mL conical, skirted[2)]	50 – 75 mL	80 – 120 mL	200 – 250 mL flat/ 175 – 225 mL conical	MTP, DWP, PCR plates
30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	35 mm	45 mm	62 mm	–
83 mm	78.5 mm	122 mm	119 mm	122 mm	122 mm	115 mm	122 mm	138 mm	136 mm	53 mm
83 mm	78.5 mm	116 mm	116 mm	–	–	–	118 mm	125 mm	127 mm	–
										
3/12	3/12	3/12	3/12	4/16	4/16	4/16	2/8	1/4	1/4	4/16 (MTP) 1/4 (DWP)
	conical			flat with conical inlay		flat with rubber mat	flat with rubber mat	flat with rubber mat	flat with rubber mat	flat with rubber mat
151 mm	141 mm	178 mm	173 mm	173 mm	173 mm	173 mm	173 mm	173 mm	180 mm	154 mm
2,701 × g	2,522 × g	3,150 × g	3,050 × g	3,050 × g	3,050 × g	3,050 × g	3,050 × g	3,050 × g	3,220 × g	2,750 × g
2 pcs.				2 pcs.		2 pcs.	2 pcs.	2 pcs.	2 pcs.	4 pcs.
5810758009				5810763002		5810759005	5810760003	5810761000	5810770009	5810702003








Rotors for Centrifuge 58xx Family



Rotor S-4-72

> Medium capacity swing-bucket rotor with speeds up to 3,234 × g (4,200 rpm)[1)]
> Broad range of adapters available to handle all common tube formats from 0.2 mL to 250 mL
> Aerodynamic round bucket design for up to 48 % energy savings compared to Rotor A-4-62




[1)] Please note that a software upgrade may be necessary for older centrifuges when using this rotor. Please contact your local Eppendorf organization or dealer for further information.

					
Adapters for Rotor S-4-72					
Tube Volume	1.5/2.0 mL	2.6 – 8 mL	5.5 – 12 mL	9 mL	Eppendorf Tubes® 5.0 mL
Max. tube diameter	11 mm	13 mm	16 mm	17.5 mm	17 mm
Max. vessel height	43 mm	115 mm	112 mm	113 mm	60 mm
Adapter					
Number of vessels per adapter/rotor	26/104	14/56	13/52	12/48	8/32[1)]
Bottom shape	flat	round	round	round	conical
Centrifugation radius	159 mm	159 mm	157 mm	158 mm	163 mm
Max. RCF	3,136 × g	3,136 × g	3,096 × g	3,116 × g	3,215 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5804794001	5804789008	5804791002	5804792009	5804793005

[1)] For Eppendorf Tubes® 5.0 mL with screw cap the capacity is limited to 6 tubes per adapter.[2)] Please order adapter for 25 mL conical tubes snap cap 5820733004.[3)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[4)] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.

Ordering information

Description	Order no.
Rotor S-4-72, incl. 4 × 250 mL round buckets	5804746007

						
15 mL conical	25 mL snap cap[2)]	25 mL screw cap[3)]	50 mL screw cap	45 mL snap cap	50 mL conical, skirted	250 mL flat/ 175 mL Falcon®[4)]
17 mm	30 mm	30 mm	30 mm	30 mm	30 mm	62 mm
120 mm	83 mm	78.5 mm	120 mm	83 mm	120 mm	130 mm
						
8/32	4/16	4/16	4/16	4/16	2/8	1/4
conical		conical			conical	flat
164 mm	137 mm	128 mm	164 mm	137 mm	153 mm	160 mm
3,234 × g	2,701 × g	2,524 × g	3,234 × g	2,701 × g	2,602 × g	3,155 × g
2 pcs.	2 pcs.				2 pcs.	2 pcs.
5804783000	5804784006				5804785002	5804787005

Rotors for Centrifuge 58xx Family



Rotor A-4-44

> High-speed swing-bucket rotor for applications up to 4,500 × g (5,000 rpm)
> Rotor A-4-44 accommodates tubes from 0.2 mL to 100 mL
> Aerosol-tight caps[1)] for safe centrifugation of hazardous samples optionally available


[1)] Aerosol-tightness tested by Public Health England, Porton Down, UK.







Adapters for Rotor A-4-44									
Tube Volume	1.5 – 2.0 mL	1.2 – 5 mL	2.6 – 7 mL	3 – 15 mL	7 – 17 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical	15 mL conical	7 – 18 mL	18 – 30 mL
Max. tube diameter	11 mm	11 mm	13 mm	16 mm	17.5 mm	17 mm	17 mm	20 mm	26 mm
Max. vessel height	43 mm	105 mm	108 mm	108 mm	110 mm	121 mm	121 mm	107 mm	110 mm
Max. vessel height for use with cap/lid[1)]	43 mm	102 mm	106 mm	106 mm	106 mm	–	121 mm	104 mm	100 mm
Adapter									
Number of vessels per adapter/rotor	12/48	14/56	9/36	7/28	6/24	4/16	2/8	4/16	2/8
Bottom shape	flat	flat with rubber mat	flat with rubber mat	flat with rubber mat	flat with rubber mat	conical	conical	flat with rubber mat	flat with rubber mat
Centrifugation radius	148 mm	150 mm	150 mm	150 mm	150 mm	155 mm	157 mm	150 mm	150 mm
Max. RCF	4,100 × g	4,200 × g	4,200 × g	4,200 × g	4,200 × g	4,332 × g	4,388 × g	4,200 × g	4,200 × g
Packaging	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5804751000	5804750004	5804752007	5804753003	5804754000	5804755006	5804717007	5804756002	5804757009

[1)] Exceeding the maximum tube length may reduce the loading capacity of the rotor. Please perform a manual swing-out test before starting the centrifuge run to make sure the tubes do not hit the rotor yoke.
[2)] Please order adapter for 25 mL conical tubes snap cap 5820733004.[3)] Please order adapter for 25 mL conical tubes screw cap 5820734000.

Ordering information

Description	Order no.
Rotor A-4-44, incl. 4 × 100 mL rectangular buckets	5804709004
Bucket for 2 × 50 mL conical tubes, for Rotor A-4-44, 4 pcs.	5804706005
Rotor A-4-44, incl. 4 buckets for 2 × 50 mL conical tubes	5804719000
Rectangular bucket 100 mL, for Rotor A-4-44, 4 pcs.	5804741005
Caps, for 100 mL rectangular bucket, aerosol-tight, 2 pcs.	5804712005
Adapter Insert, insert for 50 mL conical tubes with skirted bottom, 8 pcs.	5804737008

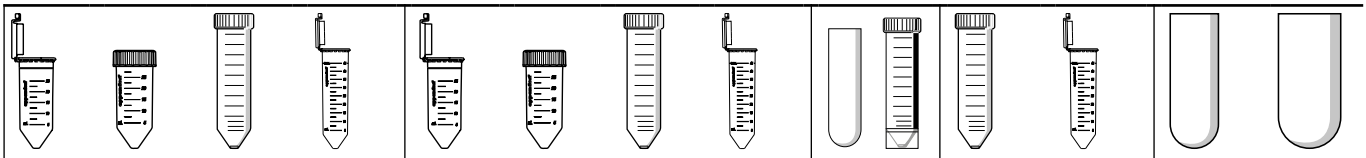

25 mL snap cap	25 mL screw cap	50 mL screw cap	45 mL snap cap	25 mL snap cap[2)]	25 mL screw cap[3)]	50 mL screw cap	45 mL snap cap	30 – 50 mL round-bottom/ 50 mL conical, skirted	50 mL screw cap	45 mL snap cap	50 – 75 mL	80 – 100 mL
30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	–	–	35 mm	45 mm
83 mm	78.5 mm	122 mm	122 mm	83 mm	78.5 mm	122 mm	122 mm	122 mm	120 mm	120 mm	119 mm	114 mm
83 mm	78.5 mm	–	–	83 mm	78.5 mm	119 mm	119 mm	108 mm	–	–	108 mm	100 mm
												
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	–/8	–/8	1/4	1/4
	conical				conical			flat with rubber mat	flat with conical inlay		flat with rubber mat	flat with rubber mat
124 mm	114 mm	155 mm	155 mm	126 mm	116 mm	157 mm	157 mm	150 mm	161 mm	161 mm	150 mm	150 mm
3,465 × g	3,186 × g	4,332 × g	4,332 × g	3,521 × g	3,242 × g	4,388 × g	4,388 × g	4,200 × g	4,500 × g	4,500 × g	4,200 × g	4,200 × g
2 pcs.				2 pcs.				2 pcs.	4 pcs.		2 pcs.	2 pcs.
5804758005				5804718003				5804759001	5804706005		5804760000	5804761006

Rotors for Centrifuge 58xx Family



Rotor F-34-6-38

> For molecular applications in tubes from 0.2 mL to 85 mL
> Max. speed: 18,514 × g (12,000 rpm) in Centrifuge 5810 R or 15,557 × g (11,000 rpm) in Centrifuge 5804/5804 R/5810[1)]
> Low rotor weight (3.2 kg) for easy handling

[1)] Rotors F-34-6-38 and FA-45-6-30 maintain 4 °C at 11,000 rpm






Adapters for Rotor F-34-6-38					
Tube Volume	1.5 – 2.0 mL	2 – 5 mL (13x75 mm)	4 – 7 mL (13x100 mm)	7 – 15 mL	Eppendorf Tubes® 5.0 mL
Max. tube diameter	11 mm	13 mm	13 mm	16 mm	17 mm
Max. vessel height for use with cap/lid	43 mm	80 mm	107 mm	112 mm	–
Adapter					
Number of vessels per adapter/rotor	4/24	3/18	3/18	2/12	1/6
Bottom shape	round	flat	flat	round	conical
Centrifugation radius	113 mm	106 mm	114 mm	112 mm	105 mm
Max. RCF at 12.100 rpm (5810 R)	18,200 × g	17,065 × g	18,353 × g	18,000 × g	17,187 × g
Max. RCF at 11.000 rpm (5804, 5804 R, 5810)	15,300 × g	14,339 × g	15,422 × g	15,150 × g	14,204 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5804770005	5804738004	5804739000	5804771001	5804777000

[1)] Please order adapter for 25 mL conical tubes screw cap 5820734000.

i For more information go to www.eppendorf.com/centrifugation

Ordering information

Description	Order no.
Rotor F-34-6-38, for 6 × 85 mL tubes, incl. rotor lid	5804727002
Rotor lid, for F-34-6-38, for Centrifuge 58xx	5804727509

							
15 mL conical	15 – 18 mL	30 mL	25 mL screw cap[1)]	50 mL screw cap	45 mL snap cap	50 mL	85 mL
17 mm	18 mm	26 mm	30 mm	30 mm	30 mm	29 mm	38 mm
123 mm	123 mm	123 mm	78.5 mm	117 mm	–	123 mm	121 mm
							
1/6	1/6	1/6	1/4	1/6	1/4	1/6	–/6
conical	round	round		conical		round	round
107 mm	109 mm	110 mm	87 mm	108 mm	108 mm	112 mm	115 mm
17,200 × g	17,550 × g	17,700 × g	14,241 × g	17,400 × g	17,400 × g	18,014 × g	18,500 × g
14,450 × g	14,750 × g	14,900 × g	14,070 × g	14,600 × g	14,600 × g	15,157 × g	15,550 × g
2 pcs.	2 pcs.	2 pcs.		2 pcs.		2 pcs.	
5804776003	5804772008	5804773004		5804775007		5804774000	–

Rotors for Centrifuge 58xx Family





Rotor FA-45-6-30

> High-speed rotor for applications in tubes from 5 – 50 mL[1)]
> Max. speed 20,133 × g (12,100 rpm) in Centrifuge 5810 R or 16,639 × g (11,000 rpm) in Centrifuge 5804/5804 R/5810[2)]
> Eppendorf QuickLock® rotor lid for fast lid locking

[1)] Please note that a software upgrade may be necessary for older centrifuges when using this rotor. Please contact your local Eppendorf organization or dealer for further information.

[2)] Rotors F-34-6-38 and FA-45-6-30 maintain 4 °C at 11,000 rpm

Ordering information

Description	Order no.
Rotor FA-45-6-30, aerosol-tight, incl. rotor lid, for 6 × 15/50 mL conical tubes	5820715006

Adapters for Rotor FA-45-6-30					
Tube Volume	2.6 – 5 mL	4 – 8 mL	5.5 – 10 mL	7.5 – 12 mL	Eppendorf Tubes® 5.0 mL
Max. tube diameter	13 mm	13 mm	16 mm	16 mm	17 mm
Max. vessel height for use with cap/lid	–	119 mm	–	119 mm	–
Adapter					
Number of vessels per adapter/rotor	1/6	1/6	1/6	1/6	1/6[1)]
Bottom shape	round	round	round	round	conical
Centrifugation radius	120 mm	120 mm	120 mm	120 mm	121 mm
Max. RCF at 12.100 rpm (5810 R)	19,642 × g	19,642 × g	19,642 × g	19,642 × g	19,806 × g
Max. RCF at 11.000 rpm (5804, 5804 R, 5810)	16,233 × g	16,233 × g	16,233 × g	16,233 × g	16,369 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5820726008	5820725001	5820728000	5820727004	5820730005

[1)] Eppendorf Tubes® 5.0 mL with screw cap will not fit in this adapter.






Eppendorf Conical Tubes

Whether you use them for centrifugation, mixing, or other applications – the Eppendorf Conical Tubes 15 mL, 25 mL and 50 mL will perfectly fit into your workflows. They represent the next step in Eppendorf's comprehensive system solutions in liquid, sample and cell handling.

More information: www.eppendorf.link/conicals





							
7 – 17 mL	15 mL	16 mL	30 mL	25 mL snap cap	25 mL screw cap	50 mL screw cap	45 mL snap cap
17.5 mm	17 mm	18 mm	26 mm	30 mm	30 mm	30 mm	30 mm
112 mm	121 mm	107 mm	104 mm	83 mm	78.5 mm	127 mm	127 mm
							
1/6	1/6	1/6	1/6	1/6	1/6	–/6	–/6
round	conical	round	round	conical	conical	conical	conical
120 mm	120 mm	120 mm	105 mm	104 mm	97 mm	123 mm	123 mm
19,642 × g	19,642 × g	19,642 × g	17,187 × g	17,023 × g	15,616 × g	19,500 × g	20,133 × g
16,233 × g	16,223 × g	16,223 × g	14,204 × g	14,069 × g	13,122 × g	16,639 × g	16,639 × g
2 pcs.	2 pcs.	2 pcs.	2 pcs.	6 pcs.	6 pcs.	–	–
5820729007	5820717009	5820720000	5820721006	5820733004	5820734000	–	–

Centrifuge 5910 Ri



Description
The refrigerated Centrifuge 5910 Ri combines high capacity and performance in a compact and ergonomic footprint. It comes with an intuitive touchscreen user interface and an advanced temperature management system.

Product features
> Large 7-inch VisioNize® touch interface for super-fast parameter settings via unique favorites function
> User management with multiple authorization levels and documentation features supporting GLP/GxP requirements
> Swing-bucket rotors and adapters for tubes and bottles from 0.2 mL to 1,000 mL as well as all types of MTP, PCR or Deepwell Plates

Ordering information

Description	Order no.
Centrifuge 5910 Ri, touch interface, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5943000011

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

www.eppendorf.link/centrifuge5910Ri

Centrifuge 5920 R



Description
Centrifuge 5920 R is a large benchtop refrigerated centrifuge with exceptional performance and high capacity, making it a superior choice for high-throughput applications.

Product features
> Swing-bucket rotors and adapters accommodate tubes and bottles from 0.2 mL to 1,000 mL
> Plate rotor options for centrifugation of all types of MTP, PCR or Deepwell Plates
> Fixed-angle rotors for high-speed molecular biology applications in tubes from 0.2 mL to 50 mL

Ordering information

Description	Order no.
Centrifuge 5920 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5948000010

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

www.eppendorf.link/centrifuge5920R

	Centrifuge 5910 Ri	Centrifuge 5920 R
1,000 mL Eppendorf bottles	4	–
1,000 mL standard bottles	–	4
750 mL bottles	4	4
180 – 250 mL bottles (flat)	6	8
50 mL conical tubes	36	52
25 mL conical tubes	36	52
5 mL and 15 mL conical tubes	68	108
1.5/2.0 mL Eppendorf Tubes®	200	368
BD Vacutainer® CPT™ (16 mm × 125 mm/8 mL)	28	80
16 mm round-bottom and blood collection tubes	104	148
13 mm round-bottom and blood collection tubes	120	196
PCR plates/MTP	20	28
Universal adapters for conical tubes, plates and bottles	■	■
Dual use of plates and tubes in one rotor bucket	■	■
Plate rotor options for MTP, PCR or DWP	■	■
Fixed-angle rotors for high-speed applications	■	■

Centrifuge Packages 5910 Ri

Ordering information

Description	Order no.
Centrifuge 5910 Ri, touch interface, refrigerated, High Speed Solution, with Rotor FA-6x50, 230 V/50 – 60 Hz (EU)	5943000149
Centrifuge 5910 Ri, touch interface, refrigerated, with Rotor S-4x750, incl. round buckets and adapters for 5 mL/15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	5943000516
Centrifuge 5910 Ri, touch interface, refrigerated, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes and plates, 230 V/50 – 60 Hz (EU)	5943000316
Centrifuge 5910 Ri, touch interface, refrigerated, Big Volume Harvesting Solution, with Rotor S-4xUniversal, incl. universal buckets and 1 L adapters (4x), Eppendorf 1 L bottles (4x), 230 V/50 – 60 Hz (EU)	5943000173
Centrifuge 5910 Ri, touch interface, refrigerated, Versatility Solution, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes, 175 – 250 mL bottles and plates, 230 V/50 – 60 Hz (EU)	5943000216
Centrifuge 5910 Ri, touch interface, refrigerated, with Rotor S-4xUniversal, incl. universal buckets, adapters for 5 mL/15 mL/50 mL conical tubes, 175 – 250 mL bottles and plates, adapters for 1000 mL bottles incl. 4 x 1000 mL bottles, 230 V/50 – 60 Hz (EU)	5943000904

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge Packages 5920 R

Ordering information

Description	Order no.
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for 5 mL/15 mL/25 mL/50 mL conical tubes and plates, 230 V/50 – 60 Hz (EU)	5948000911
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for round-bottom tubes with diameter 13/16 mm, 230 V/50 – 60 Hz (EU)	5948000810
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. high-capacity buckets and adapters for 15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	5948000210
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. plate/tube buckets and adapters for 15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	5948000410
Centrifuge 5920 R, keypad, refrigerated, High-Throughput Screening Solution, with Rotor S-4x1000, incl. plate/tube bucket and plate carrier, 230 V/50 – 60 Hz (EU)	5948000174
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. round buckets and adapters for 15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	5948000315

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Overview of Swing-Bucket Rotors Centrifuge 59xx Family






Model	Rotor S-4xUniversal-Large	Rotor S-4x1000 high-capacity buckets	Rotor S-4x1000 plate/tube buckets	Rotor S-4x1000 round buckets
Description	Extra high capacity	Extra high capacity	High capacity	Medium capacity, compatible with standard 1 Liter bottle
5910 Ri				
5920 R	■	■	■	■
Universal bucket	yes	no	no	no
Aerosol-tightness	yes	no	yes	yes
Max. capacity	4 × 750 mL	8 × 250 mL	40 × 50 mL	4 × 1,000 mL
Max. RCF	4,402 × g	3,153 × g	3,076 × g	3,428 × g
Max. speed	4,250 rpm	3,700 rpm	3,700 rpm	3,700 rpm
1.5/2.0 mL micro tube	368			200
Eppendorf Tubes® 5.0 mL and 15 mL conical	96	108	88	56
50 mL conical tubes	40	52	40	28
25 mL snap cap tubes	40	48	36	24
25 mL screw cap tubes	40	52	40	28
13 mm round-bottom and blood collection tubes	196	196	140	92
16 mm round-bottom and blood collection tubes	148	144	132	80
750 mL bottles	4			4
1,000 mL Eppendorf bottles				
1,000 mL standard bottles				4
PCR plates/MTP	20	24	28	
Deepwell plates (DWP)	8	8	8	


400 mL


500 mL


750 mL


400 mL


1,000 mL

Eppendorf bottles for Centrifuge 5910 Ri and Centrifuge 5920 R

Bottle Manufacturer	Volume	Order no.	Size Diameter x Height	Bottom shape	Material	S-4x Universal-Large	AT[1)]	S-4x1000 Round Bucket	AT[1)]
Eppendorf	400 mL	5810729009	80 x 133 mm	flat	PP				
Eppendorf	500 mL	5820707003	83 x 134 mm	flat	PP				
Eppendorf	750 mL	5820708000	102 x 133 mm	flat	PP	■	■	■	■
Eppendorf	400 mL	5910707002	81 x 117 mm	flat	PP				
Eppendorf	1,000 mL	5910770006	118 x 133.1 mm	flat	PP				

[1)] Aerosol tight cap possible.









Rotor S-4xUniversal	Rotor S-4x750 with round buckets	Rotor S-4x500	Rotor S-4x400
High capacity and versatility, compatible with Eppendorf 1 Liter bottle	Medium capacity, high speed	Medium capacity	Low capacity, high speed
■	■	■	■
	■		
yes	no	no	no
yes	yes	yes	yes
4 × 1,000 mL	4 × 750 mL	4 × 500 mL	4 × 400 mL
4,347 × g	4,800 × g	3,220 × g	5,263 × g
4,500 rpm	4,700 rpm	4,000 rpm	5,100 rpm
	200	96	104
68	56	48	28
36	28	20	16
36	24	20	16
36	28	20	16
120	92	100	60
104	80	64	44
4	4		
4			
20	16	16	
4	4	4	

Eppendorf bottles for Centrifuge 5910 Ri and Centrifuge 5920 R

S-4x750	AT[1)]	S-4xUniversal	AT[1)]	S-4x500	AT[1)]	S-4x400	AT[1)]
				■			
				■	■		
■	■	■					
						■	■
		■	■				

Rotors for Centrifuge 5910 Ri







Rotor S-4xUniversal

> High capacity swing-bucket rotor with max. speed 4,347 × g (4,500 rpm)
> Broad range of adapters enables high versatility for tubes and flasks from 4 mL to 1,000 mL and plates
> Universal bucket design accommodates both plates and tubes

Ordering information

Description	Order no.
Rotor S-4xUniversal, incl. universal buckets	5895200001
Universal buckets, for Rotor S-4xUniversal, 2 pcs.	5895202004
Universal buckets, for Rotor S-4xUniversal, 4 pcs.	5895203000
Caps, for Rotor S-4xUniversal, aerosol-tight, 2 pcs.	5910750005
Wide-neck bottle 1,000 mL, for Rotor S-4xUniversal, 2 pcs.	5910770006
Wide-neck bottle 750 mL, for Rotors S-4-104, S-4x750, S-4x1000, 2 pcs.	5820708000

										
Adapters for Rotor S-4xUniversal											
Tube Volume	4 mL – 8 mL	7.5 mL – 12 mL	9 mL	1.5 - 2 mL	12 × 75 mm, 5 mL FACS	50 mL conical, skirted	500 mL Corning®	750 mL	1,000 mL	MTP, DWP, PCR plates
Max. tube diameter	13 mm	16 mm	17.5 mm	11 mm	12 mm	31 mm	96 mm	102 mm	118 mm	–
Max. vessel height	119 mm	120 mm	120 mm		112 mm	124 mm	148 mm	139 mm	133 mm	80 mm
Max. vessel height for use with cap/lid[1]	117 mm	118 mm	118 mm	43 mm	107 mm	121 mm	–	135 mm	133 mm	66 mm
Adapter										
Number of vessels per adapter/rotor	30/120	26/104	21/84	46/184	46/184	7/28	1/4	1/4	1/4	5/20
Bottom shape	round	round	round	flat	round	flat	conical	flat	flat	flat
Centrifugation radius	190 mm	195 mm	188 mm	187 mm	189 mm	185 mm	187 mm	188 mm	188 mm	170 mm
Max. RCF	4,302 × g	4,415 × g	4,256 × g	4,233 × g	4,279 × g	4,188 × g	4,234 × g	4,256 × g	4,256 × g	3,849 × g
Order no.	5910755007	5910754000	5910762003	5910763000	5910758006	5910764006	5910760000	5910757000	5910756003	5910753004


[1] Please perform a manual test to determine the actual loading capacity.[2] Aerosol-tight caps compatible with MTP, DWP 96500 µl, DWP 384200 µl. Aerosol-tight caps not compatible with DWP 961,000 µl and 2,000 µl.[3] Please order adapter for 25 mL conical tubes snap cap 5820733004.[4] When used with aerosol-tight caps the max. capacity is reduced to 20 x 50 mL (5 x 50 mL per adapter).[5] Please order adapter for 25 mL conical tubes srew cap 5820734000.[6] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.

Universal Adapters for Rotor S-4xUniversal

Rotor S-4xUniversal brings outstanding versatility to those customers who need to spin a variety of vessels and plates. Three innovative universal adapters accommodate a selection of tubes, plates and bottles:

> Adapter 1: 5.0 mL and 15 mL conical tubes, MTP/DWP
> Adapter 2: 25 mL and 50 mL conical tubes, MTP
> Adapter 3: 25 mL and 50 mL conical tubes, 250 mL bottles, MTP

For customers who need either stacking capability, higher speed or aerosol-tight centrifugation of certain plate formats, a separate plate carrier is available.









Universal adapter 1
Setup for deepwell plates and Eppendorf Tubes® 5.0/15 mL.



Universal adapter 2
Setup for microplates and 25/50 mL conical tubes.



Universal adapter 3
Setup for 25/50 mL conical tubes, 250 mL bottles and microplates.

												
Eppendorf Tubes® 5.0 mL	15 mL conical	MTP, DWP	25 mL snap cap[3]	25 mL screw cap[5]	50 mL screw cap	50 mL screw cap	25 mL snap cap[3]	25 mL screw cap[5]	50 mL screw cap	45 mL snap cap	Microplate 96/384 wells	250 mL flat, 175 - 225 mL conical[6]
17 mm	17 mm	–	30 mm	30 mm	30 mm	–	30 mm	30 mm	30 mm	30 mm	–	62 mm
124 mm	124 mm	64 mm	83 mm	78.5 mm	116[4] mm	16 mm	83 mm	78.5 mm	124 mm	133 mm	16 mm	146 mm
122 mm	122 mm	[2]	83[4] mm	78.5[4] mm	116[4] mm	–	83 mm	78.5 mm	121 mm	133 mm	–	139 mm
												
17/68	17/68	1/4	9/36	9/36	9/36	1/4	7/28	7/28	7/28	7/28	1/4	1/4
conical	conical	flat	conical	conical	conical	flat	conical	conical	conical	conical	flat	flat
191 mm	191 mm	143 mm	107 mm	156 mm	192 mm	115 mm	107 mm	155 mm	191 mm	188 mm	115 mm	187 mm
4,324 × g	4,324 × g	3,237 × g	3,758 × g	3,531 × g	4,347 × g	2,604 × g	3,735 × g	3,509 × g	4,324 × g	4,256 × g	2,604 × g	4,234 × g
5910752008			5910769008				5910751001					












Rotors for Centrifuge 5910 Ri



Rotor S-4x500

> Medium capacity swing-bucket rotor with max. speed 3,220 × g (4,000 rpm)
> Rotor S-4x500 accommodates tubes and bottles from 0.2 mL to 500 mL as well as plates
> Aerosol-tight caps for safe centrifugation of hazardous samples optionally available[1)]

[1)] Aerosol-tightness tested by Public Health England, Porton Down, UK.

Adapters for Rotor S-4x500							
Tube Volume	1.5/2.0 mL	1.2 – 5 mL	2.6 – 5 mL	2.6 – 7 mL	3 – 15 mL	7 – 17 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical tubes
Max. tube diameter	11 mm	11 mm	13 mm	13 mm	16 mm	17.5 mm	17 mm
Max. vessel height	43 mm	108 mm	108 mm	108 mm	108 mm	118 mm	121 mm
Max. vessel height for use with cap/lid[1)]	43 mm	108 mm	107 mm	108 mm	108 mm	118 mm	121 mm
Adapter							
Number of vessels per adapter/rotor	20/80	20/80	25/100	18/72	16/64	16/64	12/48
Bottom shape	flat	flat	flat with rubber mat	flat with rubber mat	flat with rubber mat	flat with rubber mat	conical
Centrifugation radius	165 mm	168 mm	168 mm	168 mm	168 mm	168 mm	173 mm
Max. RCF	2,950 × g	3,000 × g	3,000 × g	3,000 × g	3,000 × g	3,000 × g	3,100 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5810745004	5810746000	5810720001	5810747007	5810748003	5810721008	5810722004









[1)] Please perform a manual test to determine the actual loading capacity.[2)] Please order adapter for 50 mL conical tubes skirted 5804737008 or 022654373 for U.S. and Canada.[3)] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.





Ordering information

Description	Order no.
Rotor S-4x500, for 500 mL rectangular buckets or MTP/Flex buckets	
incl. 4 x 500 mL rectangular buckets	5895170005
without buckets	5895171001
Rectangular bucket 500 mL, for Rotor A-4-81, 4 pcs.	5810730007
Cap, aerosol-tight, for 500 mL rectangular bucket, 2 pcs.	5810724007
Wide-neck bottle 500 mL, for Rotors A-4-81, S-4x500, rectangular, 2 pcs.	5820707003
Wide-neck bottle 400 mL, for Rotors A-4-81, S-4x500, 400 mL, lid blue, 2 pcs.	5810729009
MTP/Flex buckets, for Rotors A-4-81, S-4x500, for use with IsoRack and cell culture flask adapters as well as MTP and DWP, 2 pcs.	5810742005
MTP/Flex buckets, for Rotors A-4-81, S-4x500, for use with IsoRack and cell culture flask adapters as well as MTP and DWP, 4 pcs.	5810741009

								
25 mL snap cap	25 mL screw cap	50 mL screw cap	45 mL snap cap	30 – 50 mL round-bottom/ 50 mL conical, skirted[2)]	180 – 250 mL flat/ 175 – 225 mL conical[3)]	400 mL	500 mL	MTP, DWP, PCR plates
30 mm	30 mm	30 mm	30 mm	30 mm	62 mm	133 mm	83 mm	–
83 mm	78.5 mm	122 mm	122 mm	121 mm	133 mm		134 mm	60 mm
83 mm	78.5 mm	116 mm	116 mm	–	–	–	134	–
								
5/20	5/20	5/20	5/20	5/20	1/4	1/4	–/4	4/16 (MTP) 1/4 (DWP)
	conical			flat with rubber mat	flat with rubber mat	flat, rubber	flat	flat with rubber mat
158 mm	148 mm	173 mm	173 mm	173 mm	173 mm	180 mm	180 mm	163 mm
2,826 × g	2,647 × g	3,100 × g	3,100 × g	3,100 × g	3,100 × g	3,220 × g	3,220 × g	2 900 × g
2 pcs.				2 pcs.	2 pcs.	2 pcs.		2 pcs.
5810723000				5810739004	5825722000	5810728002	–	5810742005










Rotors for Centrifuge 5910 Ri



Rotor S-4x400

> High-speed medium capacity swing-bucket rotor with max. speed 5,263 × g (5,100 rpm)
> Broad range of adapters enables high versatility for tubes and bottles from 0.2 mL to 400 mL
> Aerosol-tight QuickLock caps for safe centrifugation of hazardous samples optionally available[1)]

[1)] Aerosol-tightness tested by Public Health England, Porton Down, UK.







						
Adapters for Rotor S-4x400						
Tube Volume	1.5 mL/2.0 mL	12 mm × 75 mm	4 mL – 8 mL	7.5 mL – 12 mL	9 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical
Max. tube diameter	11 mm	12 mm	13 mm	16 mm	17.5 mm	17 mm
Max. vessel height	39 mm	118 mm	119 mm	122 mm	122 mm	133 mm
Max. vessel height for use with cap/lid[1)]	–	112 mm	105 mm	115 mm	115 mm	126 mm
Adapter						
Number of vessels per adapter/rotor	26/104	17/68	15/60	11/44	8/32	7/28
Bottom shape	open	round	round	round	round	conical
Centrifugation radius	177 mm	172 mm	171 mm	173 mm	173 mm	180 mm
Max. RCF	5,147 × g	5,002 × g	4,818 × g	4,874 × g	4,874 × g	5,071 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5910708009	5910711000	5910703007	5910704003	5910709005	5910702000

[1)] Please perform a manual test to determine the actual loading capacity.[2)] Please order adapter for 25 mL conical tubes snap cap 5820733004.[3)] Please order adapter for 25 mL conical tubes screw cap 5820734000.
[4)] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.



Ordering information

Description	Order no.
Rotor S-4x400, incl. 400 mL round bucket	5895180000
Caps, for Rotor S-4x400, aerosol-tight, 2 pcs.	5910700008
Wide-neck bottle 400 mL, for Rotor S-4x400, 2 pcs.	5910707002

							
25 mL snap cap[2)]	25 mL screw cap[3)]	50 mL screw cap	45 mL snap cap	50 mL skirted, Centriprep and Oak Ridge 30 mL	175 mL conical (Becton Dickinson®, Nalgene®[4)]), 250 mL flat	175 – 225 mL conical	400 mL
30 mm	30 mm	30 mm	30 mm	30 mm	62 mm	62 mm	81 mm
83 mm	78.5 mm	125 mm	125 mm	122 mm	138 mm	143 mm	117 mm
83 mm	78.5 mm	117 mm	117 mm	121 mm	129 mm	137 mm	117 mm
							
4/16	4/16	4/16	4/16	3/12	1/4	1/4	1/4
	conical			skirted	flat	conical	flat
152 mm	142 mm	179 mm	179 mm	170 mm	174 mm	181 mm	173 mm
4,420 × g	4,129 × g	5,043 × g	5,043 × g	4,943 × g	5,060 × g	5,263 × g	5,030 × g
2 pcs.				2 pcs.	2 pcs.	2 pcs.	2 pcs.
5910701004				5910712006	5910705000	5910714009	5910706006

Rotors for Centrifuge 5910 Ri/5920 R



Rotor S-4x750 with round buckets

> Medium capacity swing-bucket rotor with max. speed 4,800 × g (4,700 rpm)[1)]
> Broad range of adapters enables high versatility for tubes and flasks from 0.2 mL to 750 mL and plates
> Mixed loading with 2 plate buckets and 2 round tube buckets allows for increased versatility











[1)] For 100 V device, max. speed 4,031 × g /4,300 rpm

Adapters for Rotor S-4x750							
Tube Volume	1.5/2.0 mL	12 × 75 mm, 5 mL FACS	2.6 – 8 mL	5.5 – 12 mL	9 mL	14 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical
Max. tube diameter	11 mm	12 mm	13 mm	16 mm	17.5 mm	17.5 mm	17 mm
Max. vessel height	39 mm	120 mm	121 mm	125 mm	117 mm	106 mm	125 mm
Max. vessel height for use with cap/lid[1)]	39 mm	113 mm	113 mm	120 mm	112 mm	106 mm	120 mm
Adapter							
Number of vessels per adapter/rotor	50/200	27/108	23/92	20/80	20/80	14/56	14/56
Bottom shape	flat	round	round	round	round	round	conical
Centrifugation radius	194 mm	186 mm	185 mm	186 mm	185 mm	185 mm	188 mm
Max. RCF	4,791 × g	4,594 × g	4,569 × g	4,594 × g	4,569 × g	4,569 × g	4,643 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5825740009	5825747003	5825738004	5825736001	5825743008	5825748000	5825734009

[1)] Exceeding the maximum tube length may reduce the loading capacity of the rotor. Please perform a manual swing-out test before starting the centrifuge run to make sure the tubes do not hit the rotor yoke.
[2)] Please order adapter for 25 mL conical tubes snap cap 5820733004.[3)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[4)] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer. [5)] 225 mL conical bottles from BD®/Corning® and 250 mL conical bottles from Nunc® for Rotor S-4-104 and S-4x750.

Ordering information

Description	Order no.
Rotor S-4x750, aerosol-tight, without buckets	5895121004
Rotor S-4x750, aerosol-tight, incl. round buckets	5895120008
Plate bucket, for Rotor S-4x750, aerosol-tight capable, incl. plate carrier, 2 pcs.	5895125000
Round bucket, for Rotor S-4x750, 2 pcs.	5895123007
Round bucket, for Rotor S-4x750, 4 pcs.	5895122000
Plate bucket, for Rotor S-4x750, aerosol-tight capable, incl. plate carrier, 4 pcs.	5895124003
Caps, rotors S-4-104, S-4x750, plate bucket, aerosol-tight, 2 pcs.	5820748001
Caps for 750 mL/1000 mL, for rotors S-4-104, S-4x750, S-4x1000, aerosol-tight, 2 pcs.	5820747005
Wide-neck bottle 750 mL, for Rotors S-4-104, S-4x750, S-4x1000, 2 pcs.	5820708000

									
25 mL snap cap[2]	25 mL screw cap[3]	50 mL screw cap	45 mL snap cap	30 mL	50 mL conical, skirted	250 mL flat, 175 – 225/ 250 mL conical[4][5]	500 mL Corning®	750 mL	MTP, DWP, PCR plates
30 mm	30 mm	30 mm	30 mm	25 mm	30 mm	62 mm	96 mm	102 mm	–
83 mm	78.5 mm	122 mm	122 mm	119 mm	122 mm	145 mm	147 mm	150 mm	64 mm
83 mm	78.5 mm	116 mm	116 mm	114 mm	116 mm	125 mm	–	150 mm	47 mm
									
6/24	7/28	7/28	6/24	8/32	5/20	1/4	1/4	1/4	4/16 (MTP) 1/4 (DWP)
	conical			flat	conical, skirted	flat	conical	flat	–
167 mm	157 mm	187 mm	187 mm	181 mm	177 mm	183 mm	186 mm	185 mm	161 mm
4,124 × g	3,877 × g	4,618 × g	4,618 × g	4,470 × g	4,371 × g	4,519 × g	4,594 × g	4,569 × g	3,976 × g
2 pcs.				2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
5825733002				5825755006	5825732006	5825741005	5825745000	5825744004	5895125000

Rotors for Centrifuge 5920 R



Rotor S-4xUniversal-Large












> Extra high capacity swing-bucket rotor with max. speed 4,402 × g (4,250 rpm)
> Broad range of adapters enables high versatility for tubes and flasks from 0.2 mL to 750 mL and plates
> Universal bucket design accommodates both plates and tubes

Adapters for Rotor S-4xUniversal-Large										
Tube Volume	Eppendorf Tubes® 5.0 mL	15 mL conical	MTP, DWP	1.5/2.0 mL	5 mL FACS	25 mL snap cap[1]	25 mL screw cap[2]	50 mL screw cap	45 mL snap cap	Microplate 96/384 wells
Max. tube diameter	17 mm	17 mm	-	11 mm	12 mm	30 mm	30 mm	30 mm	30 mm	-
Max. vessel height	131 mm	131 mm	45 mm	39 mm	113 mm	131 mm	131 mm	131 mm	131 mm	45 mm
Max. vessel height for use with cap/lid	123 mm	123 mm	45 mm	39 mm	82 mm	125 mm	125 mm	125 mm	125 mm	45 mm
Adapter										
Number of vessels per adapter/rotor	24/96	24/96	2 MTP, 1 DWP	92/368	51/204	10/40	10/40	10/40	10/40	2 MTP, 1 DWP
Bottom shape	conical	conical	skirted	flat	round	conical	conical	conical	conical	skirted
Centrifugation radius	218 mm	218 mm	160 mm	205 mm	205 mm	189 mm	179 mm	213 mm	213 mm	153 mm
Max. RCF	4,402 × g	4,402 × g	3,231 × g	4,140 × g	4,140 × g	3,816 × g	3,614 × g	4,301 × g		3,090 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.			2 pcs.		
Order no.		5920757008		5920747002	5920742000			5920756001		

[1] Please order adapter for 25 mL conical tubes snap cap 5820733004.[2] Please order adapter for 25 mL conical tubes screw cap 5820734000.[3] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.





									
25 mL snap cap[1]	25 mL screw cap[2]	50 mL screw cap	45 mL snap cap	Microplate 96/384 Wells	250 mL flat, 175-225 mL conical[3]	2.6 – 8 mL	5.5 – 12 mL	9 mL	14 mL
30 mm	30 mm	30 mm	30 mm	-	62 mm	13 mm	16 mm	17.5 mm	17.5 mm
131 mm	131 mm	131 mm	131 mm	18 mm	133 mm	110 mm	110 mm	136 mm	123 mm
125 mm	125 mm	125 mm	125 mm	-	126 mm	107 mm	106 mm	130 mm	120 mm
									
10/40	10/40	10/40	10/40	1 MTP	1/4	49/196	37/148	28/112	24/96
conical	conical	conical	conical	skirted	flat	round	round	round	round
107 mm	155 mm	213 mm	213 mm	134 mm	207 mm	205 mm	204 mm	209 mm	210 mm
3,735 × g	3,509 × g	4,301 × g		2,706 × g	4,180 × g	4,140 × g	4,120 × g	4,221 × g	4,240 × g
			2 pcs.			2 pcs.	2 pcs.	2 pcs.	2 pcs.
			5920755005			5920739000	5920738003	5920746006	5920751000

Rotors for Centrifuge 5920 R












Adapters for Rotor S-4xUniversal-Large					
Tube Volume	30 mL	50 mL conical, skirted	50 mL Nalgene® Oak Ridge	250 mL flat, 175 – 225 mL conical[4)]	250 mL conical (Corning®, Nunc®)
Max. tube diameter	25 mm	30 mm	29 mm	62 mm	62 mm
Max. vessel height	117 mm	141 mm	132 mm	133 mm	171 mm
Max. vessel height for use with cap/lid	108 mm	121 mm	121 mm	126 mm	144 mm
Adapter					
Number of vessels per adapter/rotor	12/48	7/28	12/48	2/8	1/4
Bottom shape	flat	conical, skirted	round	flat	conical
Centrifugation radius	194 mm	197 mm	206 mm	203 mm	208 mm
Max. RCF	3,918 × g	3,978 × g	4,160 × g	4,099 × g	4,200 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5920743007	5920748009	5920753002	5920740008	5920750003

[4)] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.



Ordering information

Description	Order no.
Rotor S-4xUniversal-Large, incl. universal buckets	5895190006
Buckets, for Rotor S-4xUniversal-Large, 4 pcs.	5895192009
Caps, Rotor S-4xUniversal-Large, universal buckets, aerosol-tight, 2 pcs.	5920752006








				
500 mL conical Corning®	500 mL flat Nalgene®	750 mL	Micro Fluidic Cards	MTP, DWP, PCR plates
96 mm	69.5 mm	102 mm	–	–
160 mm	168 mm	166 mm	153 mm	116 mm
148 mm	143 mm	143 mm	–	110 mm
				
1/4	1/4	1/4	3/12	5/20 (MTP) 2/8 (DWP)
conical	flat	flat	flat	flat
208 mm	206 mm	202 mm	200 mm	196 mm
4,200 × g	4,160 × g	4,079 × g	4,039 × g	3,938 × g
2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
5920744003	5920745000	5920741004	5920749005	5920737007

Rotors for Centrifuge 5920 R



Rotor S-4x1000 high-capacity buckets

> Extra high capacity swing-bucket rotor with max. speed 3,153 × g (3,700 rpm)
> Bucket accommodates both plates and tubes
> Buckets and adapters are autoclavable







				
Adapters for Rotor S-4x1000 high-capacity buckets				
Tube Volume	5 mL FACS	2.6 – 8 mL	5.5 – 12 mL	9 mL
Max. tube diameter	12 mm	13 mm	16 mm	17.5 mm
Max. vessel height	108 mm	107 mm	107 mm	129 mm
Adapter				
Number of vessels per adapter/rotor	52/208	49/196	36/144	29/116
Bottom shape	round	round	round	round
Centrifugation radius	204 mm	204 mm	199 mm	204 mm
Max. RCF	3,122 × g	3,122 × g	3,046 × g	3,122 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5920724002	5920718002	5920720007	5920722000

[1] Please order adapter for 25 mL conical tubes snap cap 5820733004.[2] Please order adapter for 25 mL conical tubes screw cap 5820734000.[3] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer.



Ordering information

Description	Order no.
Rotor S-4x1000, incl. high-capacity buckets	5895118003
High-Capacity bucket, Rotor S-4x1000, 2 pcs.	5895107001
High-Capacity bucket, for Rotor S-4x1000, 4 pcs.	5895106005

					
Eppendorf Tubes® 5.0 mL and 15 mL conical	25 mL snap cap[1]	25 mL screw cap[2]	50 mL screw cap	250 mL flat, 175 – 225 mL conical[3] and Nunc® 250 mL conical	MTP, DWP, PCR plates
17 mm	30 mm	30 mm	30 mm	62 mm	–
121 mm	83 mm	78.5 mm	116 mm	148 mm	88 mm
					
27/108	12/48	13/52	13/52	2/8	6/24 (MTP) 2/8 (DWP)
conical		conical		flat	flat
205 mm	179 mm	169 mm	206 mm	200 mm	185 mm
3,138 × g	2,739 × g	2,586 × g	3,153 × g	3,061 × g	2,832 × g
2 pcs.	2 pcs.			2 pcs.	2 pcs.
5920716000	5920715003			5920717006	5920729004









Rotors for Centrifuge 5920 R



Rotor S-4x1000 plate/tube buckets

> High capacity swing-bucket rotor with max. speed 3,076 × g (3,700 rpm)
> Bucket accommodates both plates and tubes
> Aerosol-tight QuickLock caps for safe centrifugation of hazardous samples optionally available[1)]

[1)] Aerosol-tightness tested by Public Health England, Porton Down, UK.

					
Adapters for Rotor S-4x1000 plate/tube buckets					
Tube Volume	2.6 – 8 mL	5.5 – 12 mL	9 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical	Eppendorf Tubes® 5.0 mL and 15 mL conical
Max. tube diameter	13 mm	16 mm	17.5 mm	17 mm	17 mm
Max. vessel height	109 mm	109 mm	109 mm	121 mm	123 mm
Max. vessel height for use with cap/lid[1)]	108 mm	108 mm	109 mm	–	121 mm
Adapter					
Number of vessels per adapter/rotor	35/140	33/132	28/112	22/88	16/64
Bottom shape	round	round	round	conical	conical
Centrifugation radius	201 mm	200 mm	200 mm	201 mm	201 mm
Max. RCF	3,076 × g	3,061 × g	3,061 × g	3,076 × g	3,076 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5920706004	5920707000	5920708007	5920710001	5920712004




[1)] Please perform a manual test to determine the actual loading capacity.[2)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[3)] Please order adapter for 25 mL conical tubes snap cap 5820733004.





Ordering information

Description	Order no.
Rotor S-4x1000, aerosol-tight, incl. plate/tube buckets	5895117007
Caps, Rotor S-4x1000: plate/tube bucket; Rotor S-4x750: plate bucket, aerosol-tight, 2 pcs.	5895111009
Plate carrier, for Rotor S-4x1000 with plate/tube buckets, 2 pcs.	5920705008
Plate/tube bucket, for Rotor S-4x1000, 4 pcs.	5895104002
Plate/tube bucket, for Rotor S-4x1000, 2 pcs.	5895105009

								
25 ml screw cap[2]	25 ml snap cap[3]	50 mL screw cap	45 mL snap cap	25 mL screw cap[2]	25 mL snap cap[3]	45 mL snap cap	50 mL screw cap	MTP, DWP, PCR plates
30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	–
78.5 mm	83 mm	121 mm		78.5 mm	83 mm	121 mm	121 mm	104 mm
–	–	–		78.5 mm	83 mm	121 mm	121 mm	91 mm
								
10/40	9/36	10/40	9/36	7/28	6/24	6/24	7/28	7/28(MTP) 2/8(DWP)
	conical				conical			flat
165 mm	175 mm	201 mm		166 mm	107 mm	201 mm	201 mm	198 mm
2,525 × g	2,678 × g	3,076 × g		2,540 × g	2,693 × g	3,076 × g	3,076 × g	3,030 × g
2 pcs.				2 pcs.				2 pcs.
5920709003				5920711008				5920705008

Rotors for Centrifuge 5920 R



Rotor S-4x1000 round buckets

> Medium capacity swing-bucket rotor with max. speed 3,428 × g (3,700 rpm)
> Broad range of adapters enables high versatility for tubes and flasks from 0.2 mL to 1,000 mL
> Mixed loading with 2 plate buckets and 2 round tube buckets allows for increased versatility

Adapters for Rotor S-4x1000 round buckets								
Tube Volume	1.5/2.0 mL	12 × 75 mm, 5 mL FACS	2.6 – 8 mL	5.5 – 12 mL	9 mL	14 mL	Eppendorf Tubes® 5.0 mL and 15 mL conical	25 mL snap cap[2)]
Max. tube diameter	11 mm	12 mm	13 mm	16 mm	17.5 mm	17.5 mm	17 mm	30 mm
Max. vessel height	39 mm	115 mm	121 mm	140 mm	117 mm	117 mm	161 mm	83 mm
Max. vessel height for use with cap/lid[1)]	39 mm	108 mm	113 mm	140 mm	112 mm	112 mm	150 mm	83 mm
Adapter								
Number of vessels per adapter/rotor	50/200	27/108	23/92	20/80	20/80	14/56	14/56	6/24
Bottom shape	flat	round	round	round	round	round	conical	conical
Centrifugation radius	219 mm	211 mm	210 mm	211 mm	210 mm	210 mm	224 mm	107 mm
Max. RCF	3,352 × g	3,229 × g	3,214 × g	3,229 × g	3,214 × g	3,214 × g	3,428 × g	2,005 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5825740009	5825747003	5825738004	5825736001	5825743008	5825748000	5825734009	

[1)] Exceeding the maximum tube length may reduce the loading capacity of the rotor. Please perform a manual swing-out test before starting the centrifuge run to make sure the tubes do not hit the rotor yoke. [2)] Please order adapter for 25 mL conical tubes snap cap 5820733004.[3)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[4)] Please note that these conical bottles need to be used together with a conical form insert provided by the manufacturer. [5)] 225 mL conical bottles from BD®/Corning® and 250 mL conical bottles from Nunc® for Rotor S-4-104 and S-4x750.


Ordering information

Description	Order no.
Round bucket, for Rotor S-4x1000, 2 pcs.	5895103006
Round bucket, for Rotor S-4x1000, 4 pcs.	5895102000
Rotor S-4x1000 round buckets, aerosol-tight, incl. 4 × 1,000 mL round buckets	5895100007
Caps for 750 mL/1000 mL, for rotors S-4-104, S-4x750, S-4x1000, aerosol-tight, 2 pcs.	5820747005
Wide-neck bottle 750 mL, for Rotors S-4-104, S-4x750, S-4x1000, 2 pcs.	5820708000






















25 mL screw cap[3]	50 mL screw cap	45 mL snap cap	30 mL	50 mL conical, skirted	250 mL flat, 175 – 225/ 250 mL conical[4)5)]	500 mL Corning®	500 mL Nalgene®	600 mL TPP	750 mL	1 Liter Nalgene®	MTP, DWP, PCR plates
30 mm	30 mm	30 mm	25 mm	30 mm	62 mm	96 mm	69.5 mm	98 mm	102 mm	98 mm	–
78.5 mm	156 mm	156 mm	144 mm	151 mm	176 mm	167 mm	183 mm	181 mm	150 mm	196 mm	104 mm
78.5 mm	150 mm	150 mm	139 mm	147 mm	156 mm	167 mm	183 mm	181 mm	150 mm	–	91 mm




7/28	7/28	6/24	8/32	5/20	1/4	1/4	1/4	1/4	1/4	1/4	7/28 (MTP) 2/8 (DWP)
conical	conical	conical	flat	conical, skirted	flat	conical	flat	conical	flat	flat	flat
121 mm	223 mm	223 mm	212 mm	209 mm	214 mm	218 mm	221 mm	224 mm	216 mm	218 mm	198 mm
1,852 × g	3,413 × g	3,413 × g	3,245 × g	3,199 × g	3,275 × g	3,336 × g	3,382 × g	3,428 × g	3,306 × g	3,336 × g	3,030 × g
2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
	5825733002		5825755006	5825732006	5825741005	5825745000	5920703005	5920701002	5825744004	5920700006	5895105009

Overview of Fixed-Angle Rotors Centrifuge 59xx Family







Model	Rotor FA-6x250	Rotor FA-6x50	Rotor FA-20x5
Description	Processing of cells in higher volumes at high speed	Molecular biology applications in tubes up to 50 mL	Applications in Eppendorf Tubes® 5.0 mL
5910 Ri	■	■	■
5920 R	■	■	■
Aerosol-tightness	yes	yes	yes
Max. capacity	6 × 250 mL	6 × 50 mL	20 × 5 mL
Max. RCF	15,054 × g	20,130 × g	20,913 × g
Max. speed	10,100 rpm	12,100 rpm	13,100 rpm
1.5/2.0 mL micro tube		6	20
Eppendorf Tubes® 5.0 mL and 15 mL conical	24	6	20/0
25 mL conical tubes	6[1)2)]	6[3)4)]	
50 mL conical tubes	6	6	
85 mL Oakridge tubes	6		
250 mL conical tubes	6		

[1)] Screw cap tubes only.[2)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[3)] Please order adapter for 25 mL conical tubes srew cap 5820734000.[4)] Please order adapter for 25 mL conical tubes snap cap 5820733004.

Advanced Rotor Design



Cross section of Rotor FA-6x50 (6 × 50 mL conical) showing the light-weight design. All metal not needed for safety or performance is hollowed out to reduce weight and improve handling.

Low rotor weight
Eppendorf's fixed-angle rotors are among the lightest in the industry to improve handling and operational safety. Light-weight rotors cause less wear and tear on the motor and allow for faster acceleration and braking times.







Rotor FA-48x2	Rotor FA-30x2	Rotor F-48x15
Aerosol-tight microcentrifuge tube rotor	Aerosol-tight microcentrifuge tube rotor for safe centrifugation of hazardous samples	High-capacity fixed-angle rotor for 15 mL conical and glass tubes
■	■	■
■	–	–
yes	yes	
48 × 2 mL	30 × 2 mL	40 × 15 mL
21,194 × g (5920 R) / 22,132 x g (5910 Ri)	20,984 × g	5,005 × g
13,700 rpm (5920 R) / 14,000 rpm (5910 Ri)	13,700 rpm	5,500 rpm
48	30	
		0/40

Eppendorf QuickLock® lids for ergonomic lid locking
Our aerosol-tight QuickLock rotors close with only ¼ of a turn. This not only saves you time during every day use, it also takes repetitive stress off your wrist.

Superior temperature control
Aluminum, with its high heat conductivity, allows fast pre-cooling and accurate temperature control in refrigerated centrifuges.



Perfect fit with Eppendorf Conical Tubes 15 mL and 50 mL
The Eppendorf Conical Tubes are characterized by an outstanding centrifugation stability of up to 19,500 × g [1]. This makes them suited for a broad range of applications.

[1] Test conditions: Rotor FA-45-6-30 in Eppendorf Centrifuge 5810 R (using a suitable centrifuge adapter for 15 mL tube), sample: Saline solution (density: 1.0 g/mL), controlled centrifugation temp.: 25 °C, centrifugation time: 90 min (SnapTec® tube: 17,000 x g max.)

Rotors for Centrifuge 5910 Ri/5920 R



Rotor FA-6x250

> Fixed-angle rotor for up to 6 x 250 mL bottles[1)]
> Ideal for the pelleting of microorganisms and mammalian cells
> 12 different adapters for broad range of additional applications

[1)] To run this rotor, a software update is required for earlier centrifuges (5910 R & 5920 R). Please contact your local Eppendorf organization or dealer for further information.














Ordering information

Description	Order no.
Rotor FA-6x250, aerosol-tight, for 6 x 250 mL bottles, incl. Eppendorf QuickLock® rotor lid	5895175007

Adapters for Rotor FA-6x250								
Tube Volume	5 mL	2.6 – 8.0 mL	5.5 – 12.0 mL	9 mL	Eppendorf Tubes® 5.0 mL and 15 mL	25 mL screw cap[2)]	50 mL screw cap	45 mL snap cap
Max. tube diameter	12 mm	13 mm	16 mm	17.5 mm	17 mm	30 mm	30 mm	30 mm
Max. vessel height for use with cap/lid[1)]	114 mm	114 mm	115 mm	112 mm	122 mm	78.5 mm	125 mm	125 mm
Adapter								
Number of vessels per adapter/rotor	9/54	8/48	7/42	7/42	4/24	1/6	1/6	1/6
Bottom shape	round	round	round	round	conical		conical	
Centrifugation radius	126 mm	125 mm	125 mm	126 mm	120 mm	95 mm	110 mm	110 mm
Max. RCF	14,370 × g	14,256 × g	14,256 × g	14,370 × g	13,686 × g	10,834 × g	12,545 × g	12,545 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.		2 pcs.	
Order no.	5920765000	5920763008	5920762001	5920764004	5920761005		5920760009	

[1)] Please perform a manual test to determine the actual loading capacity.[2)] Please order adapter for 25 mL conical tubes screw cap 5820734000.[3)] 175 mL conical bottles from BD/Corning® (352076). Please note that these conical bottles need to be used together with a conical form insert provided by the bottle manufacturer.[4)] 250 mL flat bottom bottles from Nalgene® (3127-0250, 3122-0250, 3120-0250) and Corning® (431841, 431842). When used with wide lid 250 mL flat bottom bottle from Nalgene® (3140-0250) max. capacity is reduced to 4 x 250 mL.



							
50 mL	10 mL	16 mL	30 mL	50 mL	85 mL	175 mL[3]	250 mL[4]
30 mm	17 mm	18 mm	26 mm	29 mm	38 mm	62 mm	62 mm
125 mm	115 mm	115 mm	116 mm	125 mm	118 mm	118 mm	135 mm
							
1/6	7/42	7/42	3/18	1/6	1/6	1/6	1/6
conical, skirted	round	round	round	round	round	conical	flat
108 mm	126 mm	126 mm	125 mm	111 mm	113 mm	132 mm	132 mm
12,317 × g	14,370 × g	14,370 × g	14,256 × g	12,659 × g	12,887 × g	15,054 × g	15,054 × g
2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	–	–
5920766007	5920769006	5920770004	5920767003	5920771000	5920768000	Conical form insert required[3]	No adapter required[4]

Rotors for Centrifuge 5910 Ri/5920 R



Rotor FA-6x50

> High-speed rotor for applications in tubes from 5 – 50 mL
> Max. speed 20,130 × g (12,100 rpm)
> Eppendorf QuickLock® rotor lid for fast lid locking

Ordering information

Description	Order no.
Rotor FA-6x50, aerosol-tight, incl. rotor lid, 6 × 50 mL conical tubes	5895150004

Adapters for Rotor FA-6x50						
Tube Volume	2.6 – 5 mL	4 – 8 mL	5.5 – 10 mL	7.5 – 12 mL	Eppendorf Tubes® 5.0 mL	7 – 17 mL
Max. tube diameter	13 mm	13 mm	16 mm	16 mm	17 mm	17.5 mm
Max. vessel height for use with cap/lid	119 mm	119 mm	119 mm	119 mm	121 mm	112 mm
Adapter						
Number of vessels per adapter/rotor	1/6	1/6	1/6	1/6	1/6[1)]	1/6
Bottom shape	round	round	round	round	conical	round
Centrifugation radius	120 mm	120 mm	120 mm	120 mm	121 mm	120 mm
Max. RCF	19,642 × g	19,642 × g	19,642 × g	19,642 × g	19,806 × g	19,642 × g
Packing	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
Order no.	5820726008	5820725001	5820728000	5820727004	5820730005	5820729007



[1)] Eppendorf Tubes® 5.0 mL with screw cap will not fit in this adapter.

Eppendorf Tubes® BioBased

> Tubes are made from 90 % renewable-based feedstock plus 10 % fossil-based feedstock
> ACT labeled – Environmental Impact Factor Certification
> "Certified ISCC PLUS Manufacturer" (International Sustainability & Carbon Certification)
> General Quality Certificates / Compliance with Standards, lot-specific certificates available
> Eppendorf Tubes® in 5.0 mL, 15 mL, 25 mL and 50 mL in Sterile (sterile, pyrogen-free, DNase- / RNase-free, DNA (human and bacterial) free

For more information go to chapter "tubes and plates".



							
15 mL	16 mL	30 mL	25 mL snap cap	25 mL screw cap	35 mL	50 mL screw cap	45 mL snap cap
17 mm	18 mm	26 mm	30 mm	30 mm	29 mm	30 mm	30 mm
121 mm	107 mm	104 mm	83 mm	78.5 mm	113 mm	116 mm	118 mm
							
1/6	1/6	1/6	1/6	1/6	1/6	–/6	–/6
conical	round	round	conical	conical	conical	conical	conical
120 mm	120 mm	105 mm	104 mm	97 mm	112 mm	123 mm	123 mm
19,642 × g	19,642 × g	17,187 × g	17,023 × g	15,877 × g	18,333 × g	20,133 × g	20,133 × g
2 pcs.	2 pcs.	2 pcs.	6 pcs.	6 pcs.	2 pcs.	–	–
5820717009	5820720000	5820721006	5820733004	5820734000	5820722002	–	–

Rotors for Centrifuge 5910 Ri/5920 R



Rotor FA-20x5

> 20 places for Eppendorf Tubes® 5.0 mL[1)]
> Max. speed: 20,913 × g (13,100 rpm)
> Aerosol-tight[2)] Eppendorf QuickLock® rotor lid

[1)] For Eppendorf Tubes® 5.0 mL with screw cap the capacity is limited to 10 tubes.
[2)] Aerosol-tightness tested by Public Health England, Porton Down, UK.

Ordering information

Description	Order no.
Rotor FA-20x5, aerosol-tight, for 20 Eppendorf Tubes® 5.0 mL, incl. Eppendorf QuickLock® rotor lid	5895130003
Adapter, for 1 vessel 1.5 – 2.0 mL, for all 5.0 mL rotors, 4 pcs.	5820768002
Adapter, for 1 cryo tube, for all 5.0 mL rotors, 4 pcs.	5820769009
Adapter, for 1 HPLC tube, for all 5.0 mL rotors, 4 pcs.	5820770007



Rotor FA-48x2

> 48 places for 1.5/2.0 mL tubes
> Max. speed: 21,194 × g/13,700 rpm (5920 R) / 22,132 x g / 14,000 rpm (5910 Ri)
> Eppendorf QuickLock® rotor lid for fast lid locking

Ordering information

Description	Order no.
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Rotor FA-48x2, 48 × 1.5/2 mL tubes, incl. aerosol-tight Eppendorf QuickLock® rotor lid	5895135005
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008



Rotor F-48x15

> High-capacity fixed-angle rotor for 15 mL conical and glass tubes
> Maximum speed: 5,005 × g (5,500 rpm)
> Form inserts for 15 mL conical tubes

Ordering information

Description	Order no.
Rotor F-48x15, for 40 x 15 mL conical tubes, incl. 48 steel sleeves and adapters	5895160000

Rotors for Centrifuge 5910 Ri



Rotor FA-30x2
> 30 places for 1.5/2.0 mL tubes
> Max. speed: 20,984 × g (max. 13,700 rpm)
> Eppendorf QuickLock® rotor lid for fast lid locking

Ordering information

Description	Order no.
Rotor FA-30x2, incl. aerosol-tight Eppendorf QuickLock® rotor lid	5895155006

Mobile Tables



Description
Is space a limited resource in your lab or are you looking for an ergonomic location for your Eppendorf tabletop centrifuge? The new Eppendorf Mobile Tables save precious benchtop space and provide the freedom and flexibility to use your Centrifuge 5804/5804 R, 5810/5810 R, 5910 Ri or 5920 R wherever you need it.

Product features
> Designed for Centrifuge 5804/5804 R, 5810/5810 R, 5910 R/5910 Ri, 5920 R
> Save precious benchtop space
> Sturdy design for safe centrifugation

Ordering information

Description	Order no.
Mobile table for under bench storage (low design), fits under standard 90 cm lab bench with centrifuge lid closed	
for Centrifuge 5804/5804 R, 5810/5810 R, 5910 R, 5910 Ri and 5920 R	5921000010
Mobile table for ergonomic loading and unloading (high design), fits in any empty floor space	
for Centrifuge 5804/5804 R, 5810/5810 R, 5910 R, 5910 Ri and 5920 R	5921000012

Concentrator plus



Description
With its advanced heating technology, the Eppendorf Concentrator plus facilitates fast and efficient, gentle vacuum concentration of DNA, RNA, nucleotides, proteins and other liquid or wet samples. Its new coated lid provides superior chemical resistance against many acids and organic solvents.

Product features
> Comes in 3 system configurations
> Extremely quiet operation <50 dB(A)
> Chemical-resistant, maintenance-free PTFE diaphragm pump eliminates the need for changing pump oil

Technical specifications

Model	Concentrator plus basic	Concentrator plus system	Concentrator plus system w/port
Vacuum		20 hPa (20 mbar)	20 hPa (20 mbar)
Sample capacity	max. 144 vessels/2 microplates	max. 144 vessels/2 microplates	max. 144 vessels/2 microplates
Fixed speed	1,400 rpm	1,400 rpm	1,400 rpm
Tube volume	0.2 – 50 mL	0.2 – 50 mL	0.2 – 50 mL
Port to connect external devices to vacuum pump	no	no	yes
Power supply	230 V, 50 – 60 Hz	230 V, 50 – 60 Hz	230 V, 50 – 60 Hz
Max. power consumption	150 W	350 W	350 W
Dimensions (W × D × H)	33 × 37 × 23 cm / 12.6 × 14.5 × 9.1 in	33 × 58 × 29 cm / 12.6 × 20.9 × 11.7 in	33 × 58 × 29 cm / 12.6 × 20.9 × 11.7 in
Weight w/o accessories	16.5 kg / 37.5 lb	31.5 kg / 68.3 lb	31.5 kg / 68.3 lb

Ordering information

Description	Order no.
Concentrator plus basic device, w/o pump, with Rotor F-45-48-11	
230 V/50 – 60 Hz (EU)	5305000100
Concentrator plus complete system, with integrated diaphragm vacuum pump	
with Rotor F-45-48-11, 230 V/50 – 60 Hz (EU)	5305000304
without rotor, 230 V/50 – 60 Hz (EU)	5305000509
Concentrator plus complete system, with integrated diaphragm vacuum pump, with connection, e.g., for a gel dryer	
without rotor, 230 V/50 – 60 Hz (EU)	5305000703
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
CombiSlide Adapter, for 12 slides Combi Slide, for Rotors A-2-MTP and A-4-81 (MTP), 2 pcs.	5825706005
Adapter, for 1 PCR tube 0.2 mL, for Rotor F-45-72-8, 6 pcs.	5425723008
Spacer for simultaneous operation of two rotors, for rotors F-45-72-8 and F-45-48-11	5301316005
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Rotors for Concentrator plus



Rotor F-45-48-11
> Rotor for 48 × 1.5/2.0 mL microcentrifuge tubes
> A spacer enables additional stacking (double capacity)



Rotor F-35-6-30
> Rotor for 6 × 50 mL conical tubes
> Rotor for 6 × 15 mL conical tubes
> Also accommodates for 6 × 25 mL conical tubes





Rotor A-2-VC
> For use with MTP, PCR and Deepwell Plates up to 27 mm high
> A work tray with frame is available for PCR test plates and microplates without frames
> Rotor can be autoclaved for 20 min. at 121°C



Rotor F-45-22-17
> Max. load: 22 x 5.0 mL
> Tube Options: Snap caps and screw caps
> Tube diameter: 17 mm

Ordering information

	Description	Max. tube dimensions Ø x L	Sample capacity	Order no.
	Rotor F-45-72-8	8 × 31 mm[1]	72 × 0.5 mL	5490034007
	Rotor F-45-70-11	11 × 41/47 mm	70 × 1.5 mL, 70 × 2.0 mL	5490032004
	Rotor F-45-48-11	11 × 41/47 mm[1]	48 × 1.5 mL/2.0 mL	5490030001
	Rotor F-45-22-17	17 × 59.4-67.4 mm	22 × 5.0 mL	5490048008
	Rotor F-40-36-12	12 × 32 mm	36 × 1.5 mL	5490040007
	Rotor F-45-36-15	15 × 45 – 48 mm [2]	36 × 3.0/5.0 mL	5490035003
	Rotor F-45-16-20	20 × 42 – 55 mm [2]	16 × 6.5/10 mL	5490043006
	Rotor F-40-18-19	19 × 66 mm	18 × 10 mL	5490037006
	Rotor F-45-12-31	31 × 55 mm	12 × 20 mL	5490044002
	Rotor F-35-8-24	24 × 86 – 105 mm [2]	8 × 25 mL	5490039009
	Rotor F-45-24-12	12 × 67 – 100 mm [2] [3]	24 × 5 – 7 mL	5490036000
	Rotor F-50-8-16	16 × 105 – 120 mm [2]	8 × 8 – 12 mL	5490041003
	Rotor F-50-8-18	18 × 105 – 128 mm [2]	8 × 10 – 18 mL	5490042000
	Rotor F-45-8-17	17 × 116 – 123 mm [2]	8 × 15 mL conical tubes	5490038002
	Rotor F-35-6-30	17 × 116 – 123 mm or 30 × 116 – 123 mm [2]	6 × 15 mL conical tubes or 6 × 50 mL conical tubes	5490047001
	Rotor A-2-VC	128 × 86 × 27 mm	2 × MTP or skirted PCR plates 2 × Deepwell plates (DWP) (max. height = 27 mm)	5490045009

[1] Rotor is stackable for double capacity using spacer 5301316.005. [2] Min./max. tube length. [3] Tube length = 75 mm: max capacity 24 tubes, tube length > 75 mm: max capacity 12 tubes.

High-Speed Centrifuge CR22N



Whether your work requires harvesting of biomass in volumes of up to 6 L per run, pelleting of cells, subcellular organelles or larger viruses, or extraction, precipitation, concentration and purification of nucleic acids in up to 50 mL tubes, the Centrifuge CR22N is the optimal solution to support your everyday centrifugation tasks.

> Speeds of up to 58,700 x g (fixed-angle) or 11,500 x g (swing-bucket) support applications in genomics, cell biology and proteomics
> Unique 1.5 L triangular bottle for easy and time efficient harvesting of cells, yeast and bacterial cultures (up to 15,100 x g)
> Large touchscreen interface for fast and easy operation
> User management and documentation function supports labs working in a GxP environment
> Self-locking rotor system for increased safety and convenience

Ordering information

Description	Order no.
High-Speed Centrifuge CR22N, refrigerated, 230 V/50/60 Hz (no plug), 30 A	5721220012
CR22N Harvesting Bundle (4 x 1.5 L), refrigerated, High-Speed Centrifuge CR22N incl. rotor R9A2 and 4 x 1.5 L triangular bottles, 230 V/50/60 Hz (no plug), 30 A	5721261412

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Inquire with our service experts to install your fitting plug

Unique 1.5 L Triangular Bottle – Spinning Made Easy



Gain great flexibility and save precious time with our innovative triangular bottles:

> No minimum filling level. Spin samples between 0 – 1.5 L without worrying about bottle stability
> Reduces handling steps during the separation process such as balancing, supernatant harvesting, pellet recovery and cleaning of bottles after the run

Ordering information

Description	Order no.
Rotor R9A2, fixed-angle rotor, incl. 4 x 1500PP bottle (WM), for Centrifuge CR22N	5721221014
Rotor R9A2, fixed-angle rotor, incl. 4 x 1500PP bottle (WM), for Centrifuge CR30NX	5721302115

Learn more about the benefits of our unique 1.5 L triangular bottle

www.eppendorf.link/triangular-bottle

Rotors for Centrifuge CR22N

Product Name	Max. capacity	Max. speed	Max. RCF
fixed-angle rotor			
Rotor R9A2	4 x 1,500 mL	8,500 rpm	15,100 × g
Rotor R9A	4 x 1,000 mL	9,000 rpm	15,300 × g
Rotor R10A3	6 x 500 mL	10,000 rpm	18,800 × g
Rotor R10A5	6 x 500 mL	10,000 rpm	18,900 × g
Rotor R12A3	6 x 250 mL	12,000 rpm	23,800 × g
Rotor R12A4	72 x 2 mL	12,000 rpm	23,800 × g
Rotor R12A6	4 x 500 mL	12,000 rpm	22,500 × g
Rotor R13A	6 x 250 mL	13,000 rpm	26,400 × g
Rotor R14A	4 x 250 mL	14,000 rpm	30,240 × g
Rotor R14A3	10 x 100 mL	14,000 rpm	29,100 × g
Rotor R15A	10 x 50 mL	15,000 rpm	32,300 × g
Rotor R18A	8 x 50 mL	18,000 rpm	42,200 × g
Rotor R19A	6 x 80 mL	19,000 rpm	45,600 × g
Rotor R20A2	8 x 50 mL	20,000 rpm	48,000 × g
Rotor R21A	16 x 11 mL	21,000 rpm	53,250 × g
Rotor R21A2	6 x 30 mL	21,000 rpm	50,000 × g
Rotor R22A	18 x 7 mL	22,000 rpm	54,700 × g
Rotor R22A4	30 x 2 mL	22,000 rpm	55,200 × g
Rotor R22A6	12 x 10 mL	22,000 rpm	55,100 × g
Rotor R27A	8 x 50 mL	22,000 rpm	58,700 × g
special seal type fixed-angle rotor			
Rotor R8AY	6 x 500 mL	8,000 rpm	12,000 × g
Rotor R12AY	4 x 250 mL	12,000 rpm	22,200 × g
Rotor R16AY	6 x 80 mL	16,000 rpm	32,300 × g
Rotor R18AY	8 x 50 mL	18,000 rpm	38,800 × g
swing-bucket rotor			
Rotor R3S	4 x 500 mL	3,000 rpm	1,940 × g
Rotor R4SS	40 x 15 mL	4,000 rpm	2,900 × g
Rotor R5S4	NA	4,700 rpm	3,100 × g
Rotor R6S		5,700 rpm	5,010 × g
Rotor R8S	4 x 50 mL	8,000 rpm	11,500 × g
Rotor R10S	4 x 50 mL	10,000 rpm	16,470 × g
Rotor R15S3	4 x 12 mL	15,000 rpm	28,700 × g
horizontal rotor			
Rotor R10H	NA	10,000 rpm	13,000 × g
soil dehydration rotor			
Rotor R11D2	4 x 110 mL	11,000 rpm	15,800 × g

The maximum capacity refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

Separation example	Included tube/ bottle	Order no.
For harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in easy to handle bottles with 4 x 1.5 L.	4 x 1500PP bottle (WM)	5721221014
For harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in bottles with 4 x 1 L.	4 x 1000PP bottle (WM)	5721221015
For harvesting of bacteria, cells or yeast for e.g. recombinant protein purification or cell compartment purification in 6 x 500 mL bottles.	6 x 500PP bottle	5721221013
For harvesting of bacteria, cells or yeast for e.g. recombinant protein purification or cell compartment purification in 6 x 500 mL Nalgene® bottles.		5721221012
For harvesting of bacteria, cells or yeast for e.g. recombinant protein or cell compartment purification in 6 x 250 mL bottles.	6 x 250PP bottle	5721221011
		5721221106
For harvesting of bacteria, cells or yeast for e.g. recombinant protein purification or cell compartment purification in 4 x 500 mL Nalgene® bottles.	4 x 500PP bottle	5721221010
Lighter Rotor for harvesting of bacteria, cells or yeast and removing cellular debris for e.g. recombinant protein or cell compartment purification in 6 x 250 mL bottles.	6 x 250PP bottle	5721221009
For harvesting of bacteria, cells or yeast and removing cellular debris for e.g. recombinant protein or cell compartment purification in 4 x 250 mL bottles.	4 x 250PP bottle	5721221008
	80PP bottle	5721221105
For removing cellular debris or differential pelleting of subcellular organelles/compartments in conical tubes with 10 x 50 mL.	100 x 50TC tube and 100 x 15TC tube	5721221007
For fast removal of cellular debris or differential pelleting of subcellular organelles/compartments in conical tubes with 8 x 50 mL.	100 x 50TC tube	5721221006
Ideal for differential pelleting of cells and subcellular organelles, as well as the extraction, precipitation, concentration and purification of nucleic acids	6 x 80PP bottle	5721221103
For differential pelleting of subcellular organelles/compartments in tubes with 8 x 50 mL.	8 x 50PP tube	5721302106
	16 x 11PP thick-walled tube	5721221102
For differential pelleting of subcellular organelles/compartments or larger virus particles in tubes with 6 x 30 mL.	6 x 30PP bottle	5721221004
	7PP tube	5721221101
For pelleting of subcellular organelles/compartments or larger virus particles. For high throughput of small volumes with 30 x 2 mL tubes.		5721221003
For pelleting of subcellular organelles/compartments or larger virus particles in tubes with 12 x 10 mL.	12 x 10PP bottle	5721221002
For pelleting of subcellular organelles/compartments or larger virus particles in tubes with 8 x 50 mL.	8 x 50PP bottle	5721202101
	6 x 500PP bottle	5721221113
	4 x 250PP bottle	5721221112
	6 x 80PP bottle	5721221111
	8 x 50PP bottle	5721221110
For serum isolation or harvesting of bacteria or cells. For mid volumes with up to 4 x 500 mL tubes.		5721224003
For serum isolation, protein concentration in columns or harvesting of bacteria or cells in round bottom tubes with 40 x 15 mL.		5721264002
For plate centrifugation for e.g. ELISA or PCR in up to 12 x 96 plates.		5721224001
		5721224104
For strong pelleting of bacteria, yeast or cells for e.g. recombinant protein purification in conical tubes with 4 x 50 mL.		5721202400
	4 x 50PP tube	5721224102
	4 x 11PP thick-walled tube	5721224101
For plate centrifugation for e.g. PCR or cell-free protein synthesis with up to 12 x 96 plates.		5721227000
For liquid separation from soil or other solid organic material.		5721228000

High-Speed Centrifuge CR30NX

With high speeds up to 110,000 x g, this centrifuge reaches g-forces that cross into the range of ultracentrifugation, making it the optimal solution for laboratories continuous flow and high-speed rotors. From harvesting of biomass via continuous flow to separation steps of small particles such as viruses, organelles, extracellular vesicles or nanoparticles, the outstanding versatility and performance of Centrifuge CR30NX covers them all.

- 2-in-1 model: suitable for centrifugation steps with super-speed requirements (with vacuum function)
- Unique 1.5 L triangular bottle for easy and time efficient harvesting of cell, yeast and bacterial cultures (up to 15,100 x g)
- Immediate rotor recognition and self-locking rotor system for highest level of user safety
- Large touchscreen interface for fast and easy operation
- User management and documentation functions support labs working in a GxP environment
- Rotors for biomass harvesting via continuous flow and super-speed pelleting available.



Ordering information

Description	Order no.
High-Speed Centrifuge CR30NX, refrigerated, 230 V/50/60 Hz (no plug), 30 A, 1-phase	5721300012
CR30NX Harvesting Bundle (4 x 1.5 L), refrigerated, High-Speed Centrifuge CR30NX incl. rotor R9A2 and 4 x 1.5 L triangular bottles, 230 V/50/60 Hz (no plug), 30 A, 1-phase	5721351512

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Inquire with our service experts to install your fitting plug

Learn more about our high-speed centrifuges

www.eppendorf.link/high-speed

Super-Speed Rotors – No Switching Needed



Choose from two rotors with max. speed of 110,000 x g:

> Top-loading swing-bucket rotor for high-speed density gradient applications (e.g. rate zonal or Isopycnic centrifugation)
> Fixed-angle rotor for cell fractionation (e.g. Virus-, viral particle or exosome pelleting)
> With the self-locking rotor system and the immediate rotor recognition, you can toggle between applications in just a few minutes

Continuous flow rotor - For Biomass Harvesting



Choose from two continuous flow Rotors R10C2 or R18C2:

> For continuous flow harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in very large volumes of >10 L
> Maximum speeds of up to 14,290 x g for Rotor R10C2 and 35,100 × g for Rotor R18C2, respectively

Ordering information

Description	Order no.
Rotor R30AT, fixed-angle rotor, Super-Speed Pelleting Kit 8 x 50 mL, incl. 8 x 50PP bottle, for Centrifuge CR30NX	5721302101
Rotor R25ST, swing-bucket rotor, Super-Speed Pelleting Kit 6 x 40 mL, incl. 50 x 40PP tube, for Centrifuge CR30NX	5721302400
Rotor R10C2, continuous flow rotor, Continuous Flow Kit, rotor nominal capacity: 3,200 mL, incl. seal unit, for Centrifuge CR30NX	5721352601
Rotor R18C2, continuous flow rotor, rotor nominal capacity: 1,000 mL, batch unit excl. seal unit, for Centrifuge CR30NX	5721302600

Rotors for Centrifuge CR30NX

Product Name	Max. capacity	Max. speed	Max. RCF
continuous flow rotor			
Rotor R10C2	3,200 mL	10,000 rpm	14,290 × g
Rotor R18C2	1,000 mL	18,000 rpm	35,100 × g
fixed-angle rotor			
Rotor R7A	6 x 1,000 mL	7,000 rpm	11,100 × g
Rotor R9A	4 x 1,000 mL	9,000 rpm	15,300 × g
Rotor R9A2	4 x 1,500 mL	8,500 rpm	15,100 × g
Rotor R10A3	6 x 500 mL	10,000 rpm	18,800 × g
Rotor R10A5	6 x 500 mL	10,000 rpm	18,900 × g
Rotor R16A2	10 x 50 mL	16,000 rpm	36,100 × g
Rotor R16A3	6 x 250 mL	16,000 rpm	40,100 × g
Rotor R17A	14 x 50 mL	17,000 rpm	40,900 × g
Rotor R19A	6 x 80 mL	19,000 rpm	45,600 × g
Rotor R19A2	8 x 50 mL	19,000 rpm	50,000 × g
Rotor R20A2	8 x 50 mL	20,000 rpm	48,000 × g
Rotor R21A2	6 x 30 mL	21,000 rpm	50,000 × g
Rotor R22A4	30 x 2 mL	22,000 rpm	55,200 × g
Rotor R22A6	12 x 10 mL	22,000 rpm	55,100 × g
Rotor R27A	8 x 50 mL	27,000 rpm	88,400 × g
Rotor R30AT	8 x 50 mL	30,000 rpm	110,000 × g
horizontal rotor			
Rotor R10H	NA	10,000 rpm	13,000 × g
soil dehydration rotor			
Rotor R11D2	4 x 100 mL	11,000 rpm	15,800 × g
swing-bucket rotor			
Rotor R4SS	40 x 15 mL	4,000 rpm	2,900 × g
Rotor R5S4	NA	4,700 rpm	3,100 × g
Rotor R25ST	6 x 40 mL	25,000 rpm	110,000 × g

The maximum capacity refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

Separation example	Included tube/bottle	Order no.
For continuous flow harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in very large volumes of >10 L.		5721352601
For continuous flow harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in very large volumes of >10 L.		5721302600
For harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in bottles in 6 x 1 L bottles.	6 x 1000PP bottle	5721352100
For harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in bottles in 4 x 1 L bottles.	4 x 1000PP bottle	5721302114
For harvesting of bacteria, cells or yeast for e.g. recombinant protein or antibody purification in easy to handle bottles with 4 x 1.5 L.	4 x 1500PP bottle	5721302115
For harvesting of bacteria, cells or yeast for e.g. recombinant protein purification or cell compartment purification in 6 x 500 mL bottles.	6 x 500PP bottle	5721302112
For harvesting of bacteria, cells or yeast for e.g. recombinant protein purification or cell compartment purification in 6 x 500 mL Nalgene® bottles.		5721302113
For removing cellular debris or differential pelleting of subcellular organelles/compartments and easy handling in conical tubes with 10 x 50 mL.	100 x 15TC tube and 100 x 50TC tube	5721302110
For fast harvesting of bacteria, cells or yeast and removing cellular debris for e.g. recombinant protein or cell compartment purification in 6 x 250 mL bottles.	6 x 250PP bottle	5721302111
For fast removal of cellular debris or differential pelleting of subcellular organelles/compartment in tubes with 14 x 50 mL.	14 x 50PP tube with M-PP lid	5721302109
For fast removal of cellular debris or differential pelleting of subcellular organelles/compartments in tubes with 6 x 80 mL.	6 x 80PP bottle	5721302108
For differential pelleting of subcellular organelles/compartments or larger virus particles in conical tubes with 8 x 50 mL.	100 x 50TC tube	5721302107
For differential pelleting of subcellular organelles/compartments in tubes with 8 x 50 mL.	8 x 50PP tube and M-PP lid	5721221005
For differential pelleting of subcellular organelles/compartments or larger virus particles in tubes with 6 x 30 mL.	6 x 30PP bottle	5721302105
For pelleting of subcellular organelles/compartments or larger virus particles. For high throughput with 30 x 2 mL tubes.		5721302104
For pelleting of subcellular organelles/compartments or larger virus particles in tubes with 12 x 10 mL.	12 x 10PP bottle	5721302103
For pelleting of subcellular organelles/compartments or larger virus particles in tubes with 8 x 50 mL.	8 x 50PP bottle	5721302102
For pelleting and separation of small viruses, subcellular particles and vesicles in tubes with 8 x 50 mL.	8 x 50PP bottle	5721302101
For plate centrifugation for e.g. PCR or cell-free protein synthesis with up to 12 x 96 MTP.		5721302700
For liquid separation from soil or other solid organic material.		5721302800
For serum isolation, protein concentration in columns or harvesting of bacteria or cells in round bottom tubes with 40 x 15 mL.		5721352402
For plate centrifugation for e.g. ELISA or PCR in up to 12 x 96 plates.		5721302401
For pelleting or density gradient separation of subcellular organelles/compartments or virus particles in tubes with 6 x 40 mL.	50 x 40PP tube	5721302400

Ultracentrifuges - CP-NX Series

The CP-NX Centrifuge Series, the flagship of our ultracentrifuge portfolio, has been designed to make ultracentrifugation as safe and convenient as possible. With speeds of up to 803,000 x g (100,000 rpm), it is the optimal solution for nucleic acid, vesicle, organelle and virus isolation, as well as protein and nano-particle purification, just to name a few.

The centrifuge series consists of three models: Centrifuge CP100NX, CP90NX and CP80NX[1)], all of which share the same great range of user-friendly and innovative features along with a comprehensive rotor portfolio, making them your indispensable companion for all high- to ultra-speed applications.

The Automatic Rotor Life Management System (RLM) significantly increases the lifetime of the rotors by automatically tracking the exact run times on the internal rotor memory, making handwritten rotor logs a thing of the past. The self-locking rotor system eliminates the need to manually tighten the rotor, enabling quick and easy rotor exchange within seconds. The non-contact imbalance sensor ensures safe operation, while the possibility to balance samples by eye (up to 5 mm)[2)] eliminates time-consuming sample balancing via scale.

The large touch display stands out with its intuitive, multilingual operation, offering three-level user management and documentation of runs. The additional option to pre-program up to 1,000 programs supports multi-user labs as well as laboratories working in GxP compliance.



[1)] The CP-NX models are available with max. speeds of 100,000 rpm (CP100NX)/90,000 rpm (CP90NX)/80,000 rpm (CP80NX), respectively. [2)] Except rotor P21A2

Learn more about our ultracentrifuge solutions

www.eppendorf.link/ultracentrifuge

Ordering information

Description	Order no.
Centrifuge CP100NX, refrigerated, touch interface, 230 V/50/60 Hz (no plug), 16 A	5720110012
Centrifuge CP90NX, refrigerated, touch interface, 230 V/50/60 Hz (no plug), 16 A	5720109012
Centrifuge CP80NX, refrigerated, touch interface, 230 V/50/60 Hz (no plug), 16 A	5720108012

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Inquire with our service experts to install your fitting plug

Product Name	Max. capacity	Max. speed	Max. RCF	K-factor	Included tube/bottle	Order no.
fixed-angle rotor						
Rotor P21A2	6 x 230 mL	21,000 rpm	71,000 × g	486	6 x 230PP bottle	5720211205
Rotor P27A	6 x 160 mL	27,000 rpm	106,000 × g	352	6 x 160PC bottle	5720211206
Rotor P32AT	32 x 12 mL	32,000 rpm	111,000 × g	186		5720211204
Rotor P42AT	72 x 0.23 mL	42,000 rpm	223,000 × g	12	200 x 0.23PC Tube	5720211203
Rotor P45AT	6 x 94 mL	45,000 rpm	235,000 × g	130		5720211109
Rotor P50A3	24 x 1.5 mL	50,000 rpm	252,000 × g	33	300 x 1.5 mL micro tube (C)	5720211108
Rotor P50AT2	12 x 40 mL	50,000 rpm	303,000 × g	70		5720211107
Rotor P50AT4	44 x 6.5 mL	50,000 rpm	274,000 × g	38	100 x 4.7PC thick-walled tube	5720211202
Rotor P65A	10 x 12 mL	65,000 rpm	370,000 × g	48		5720211201
Rotor P70AT	8 x 40 mL	70,000 rpm	505,000 × g	44		5720211105
Rotor P70AT2	12 x 12 mL	70,000 rpm	452,000 × g	36		5720211104
Rotor P80AT	8 x 12 mL	80,000 rpm	615,000 × g	27		5720211103
Rotor P90AT	8 x 12 mL	90,000 rpm	700,000 × g	25		5720211102
Rotor P100AT2	8 x 6.5 mL	100,000 rpm	803,000 × g	18		5720211101
neo-angle rotor						
Rotor P65NT	10 x 12 mL	65,000 rpm	402,000 × g	23		5720212202
Rotor P65NT2	18 x 5 mL	65,000 rpm	431,000 × g	15		5720212203
Rotor P90NT	8 x 5 mL	90,000 rpm	646,000 × g	10		5720212201
swing-bucket rotor						
Rotor P28S	6 x 40 mL	28,000 rpm	141,000 × g	252	100 x 40PP tube	5720214005
Rotor P32ST	6 x 40 mL	32,000 rpm	180,000 × g	198	100 x 40PP tube	5720214003
Rotor P32ST2	6 x 16 mL	32,000 rpm	193,000 × g	216	100 x 16PP tubes	5720214004
Rotor P40ST	6 x 13 mL	40,000 rpm	284,000 × g	139	100 x 13PP tube	5720214002
Rotor P55ST2	6 x 5 mL	55,000 rpm	366,000 × g	50	100 x 5PP tube	5720214001
Rotor P56ST	6 x 4 mL	56,000 rpm	409,000 × g	54	100 x 4PP tube	5720214102
Rotor P65ST	3 x 5 mL	65,000 rpm	419,000 × g	48	100 x 5PP tube	5720214101
vertical rotor						
Rotor P50VT2	8 x 40 mL	50,000 rpm	243,000 × g	36		5720213103
Rotor P65VT2	16 x 5 mL	65,000 rpm	416,000 × g	10		5720213101
Rotor P65VT3	10 x 12 mL	65,000 rpm	402,000 × g	13		5720213102
Rotor P100VT	8 x 5 mL	100,000 rpm	700,000 × g	6		5720213001

The maximum capacity refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

Micro-Ultracentrifuges - CS150NX and CS150FNX

With extraordinarily high speeds of up to 1,050,000 x g (150,000 rpm), plus fast acceleration and deceleration ramps and a broad range of rotors, our micro-ultracentrifuges ensure speedy separation of samples such as nucleic acids, proteins, cell organelles, viruses and nanoparticles in volumes between 0.2 - 30 mL.

Depending on the space available, you can choose between a floorstanding model (CS150FNX) with a very compact footprint or a benchtop model (CS150NX) with standard power requirements for flexible placement within the laboratory. Both devices have a low noise level of <45 dB(A), ensuring a stress-free work environment, even when working directly next to the device.

Additional features include a rotor management and the self-locking rotor system, which enables quick and easy rotor exchange within seconds. The innovative, non-contact imbalance sensor ensures safe operation, while the possibility to balance samples by eye (up to 5 mm)[1)] eliminates time-consuming sample balancing via scale.

The large touch display makes operation easy, while providing enhanced security and compliance with user-based access control and documentation of runs. The ability to pre-program up to 20 programs supports multi-user labs as well as laboratories working in GxP compliance.

[1)] Except rotor S140AT, S110AT, S80AT3, S50A





Learn more about our Micro-Ultracentrifuges

www.eppendorf.link/micro-ultracentrifuge

Ordering information

Description	Order no.
Centrifuge CS150FNX, refrigerated, floorstanding, touch interface, 230 V/50/60 Hz (EU), 8 A	5720121511
Centrifuge CS150NX, refrigerated, benchtop, touch interface, 230 V/50/60 Hz (EU), 8 A	5720131511

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Inquire with our service experts to install your fitting plug

Product Name	Max. capacity	Max. speed	Max. RCF	K-factor	Included tube/bottle	Order no.
fixed-angle rotor						
Rotor S50A	6 x 30 mL	50,000 rpm	210,000 × g	61	20 x 25PC thick-walled tube	5720221012
Rotor S55A2	12 x 1.5 mL	55,000 rpm	201,000 × g	40	300 x 1.5 mL micro tube (C)	5720221011
Rotor S58A	8 x 13.5 mL	58,000 rpm	289,000 × g	50	20 x 10PC thick-walled tube	5720221010
Rotor S70AT	20 x 0.5 mL	70,000 rpm	307,000 × g	31	100 x 0.5PC tube	5720221009
Rotor S80AT2	30 x 0.5 mL	80,000 rpm	304,000 × g	17	100 x 0.5PC tube	5720221007
Rotor S80AT3	8 x 8 mL	80,000 rpm	415,000 × g	23	100 x 6PC thick-walled tube	5720221008
Rotor S100AT3	20 x 0.23 mL	100,000 rpm	436,000 × g	7	100 x 0.23PC tube	5720221005
Rotor S100AT4	6 x 4 mL	100,000 rpm	541,000 × g	16	100 x 3PC tube	5720221006
Rotor S110AT	8 x 5 mL	110,000 rpm	691,000 × g	15	100 x 4PC tube	5720221004
Rotor S120AT2	10 x 2 mL	120,000 rpm	650,000 × g	8	100 x 1PC tube	5720221002
Rotor S120AT3	14 x 0.5 mL	120,000 rpm	650,000 × g	8	100 x 0.5PC tube	5720221003
Rotor S140AT	10 x 2 mL	140,000 rpm	1,050,000 × g	5	100 x 1PC tube	5720221001
Rotor S150AT	8 x 2 mL	150,000 rpm	901,000 × g	6	100 x 1PC tube	5720221000
neo-angle rotor						
Rotor S100NT	8 x 4 mL	100,000 rpm	479,000 × g	12	100 x 4PP seal tube	5720222002
Rotor S120NT	8 x 2 mL	120,000 rpm	586,000 × g	9	100 x 2PP seal tube	5720222001
Rotor S140NT	8 x 2 mL	140,000 rpm	752,000 × g	6	100 x 2PP seal tube	5720222000
swing-bucket rotor						
Rotor S50ST	4 x 7 mL	50,000 rpm	253,000 × g	77	50 x 7PP tube	5720224002
Rotor S52ST	4 x 5 mL	52,000 rpm	276,000 × g	79	100 x 5PP tube	5720224001
Rotor S55S	4 x 2.2 mL	55,000 rpm	259,000 × g	44	100 x 2.2PP tube	5720224000
vertical rotor						
Rotor S120VT	8 x 2 mL	120,000 rpm	501,000 × g	8	100 x 2PP seal tube	5720223000

The maximum capacity refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

High-Speed- and Ultracentrifuge Consumables

Product Name	Nominal Volume	Compatible Rotors
Bottles		
10PC bottle assembly	10 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R10S, R14A3, R15S3, R17A, R19A, R20A2, R22A2, R22A6, S58A
10PC bottle (B) assembly	10 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R22A6, S58A
10PP bottle assembly	10 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R22A6, S58A
20PC bottle (C) assembly	20 mL	for Rotor S50A
20PP bottle (C)	20 mL	for Rotor S50A
30PC bottle (B3) assembly	30 mL	for Rotor P45AT, P50AT2, P70AT, R21A2
30PC bottle (C3) assembly	30 mL	for Rotor P45AT, P50AT2, P70AT, R21A2
30PP bottle	30 mL	for Rotor P45AT, P50AT2, P70AT, R21A2
30PP bottle assembly	30 mL	for Rotor P50AT2, P70AT
50PC bottle assembly	50 mL	for Rotor R10A3, R10S, R12A6, R13A, R14A, R16A3, R17A, R20A2, R22A2, R27A, R30AT
50PP bottle	50 mL	for Rotor R10A3, R10S, R12A3, R12A6, R13A, R14A, R16A3, R17A, R20A2, R22A2, R27A, R30AT
70PC bottle	70 mL	for Rotor R10A3, R12A3, R12A6, R13A, R14A, R14A3, R16A3, R19A
70PC bottle (B)	70 mL	for Rotor P45AT
70PC bottle (C)	70 mL	for Rotor P45AT
70PP bottle (C)	70 mL	for Rotor P45AT
80PP bottle	80 mL	for Rotor R10A3, R12A3, R12A6, R13A, R14A, R14A3, R16A3, R19A
160PC bottle without cap	160 mL	for Rotor P27A
160PP bottle without cap	160 mL	for Rotor P27A
230PP bottle	230 mL	for Rotor P21A2
250PC bottle	250 mL	for Rotor R10A3, R12A3, R12A6, R13A, R14A, R16A3, R7S
250PP bottle	250 mL	for Rotor R10A3, R12A3, R12A6, R13A, R14A, R16A3, R7S
500PP bottle including caps	500 mL	for Rotor R10A3, R12A6, R5S2
500PP seal bottle including caps	500 mL	for Rotor R10A3, R12A6
550SST bottle	500 mL	for Rotor R10A3, R12A6, R5S2
1000PC bottle (WM)	1,000 mL	for Rotor R7A, R9A
1000PC bottle assembly	1,000 mL	for Rotor R5S2
1000PP bottle (WM)	1,000 mL	for Rotor R7A, R9A
1000PP bottle assembly	1,000 mL	for Rotor R5S2
1500PP bottle (WM) assembly	1,500 mL	for Rotor R9A2

The maximum capacity refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

Material	Height	Diameter	Packaging Item Quantity	Order no.
polycarbonate	81 mm	16 mm	10	5720411027
polycarbonate	82 mm	16 mm	6	5720411026
polypropylene (PP)	82 mm	16 mm	10	5720411028
polycarbonate	80 mm	26 mm	6	5720411040
polypropylene (PP)	80 mm	26 mm	6	5720411119
polycarbonate	97 mm	26 mm	6	5720411127
polycarbonate	106 mm	29 mm	6	5720411126
polypropylene (PP)	97 mm	26 mm	10	5720411123
polypropylene (PP)	97 mm	26 mm	6	5720411124
polycarbonate	103 mm	29 mm	10	5721411009
polypropylene (PP)	106 mm	29 mm	10	5721411008
polycarbonate	104 mm	38 mm	10	5721411011
polycarbonate	106 mm	38 mm	6	5720411151
polycarbonate	103 mm	29 mm	6	5720411150
polypropylene (PP)	103 mm	29 mm	6	5720411153
polypropylene (PP)	106 mm	38 mm	10	5721411010
polycarbonate	120 mm	52 mm	10	5720411167
polypropylene (PP)	120 mm	52 mm	10	5720411168
polypropylene (PP)	125 mm	60 mm	10	5720411169
polycarbonate	124 mm	62 mm	10	5721411013
polypropylene (PP)	124 mm	62 mm	10	5721411012
polypropylene (PP)	163 mm	73 mm	4	5721411014
polypropylene (PP)	163 mm	73 mm	4	5721411015
stainless steel	165 mm	73 mm	2	5721411018
polycarbonate	170 mm	98 mm	6	5721411024
polycarbonate	180 mm	98 mm	6	5721411019
polypropylene (PP)	170 mm	98 mm	6	5721411025
polypropylene (PP)	180 mm	98 mm	6	5721411021
polypropylene (PP)	175 mm	126 mm	4	5721411035

High-Speed- and Ultracentrifuge Consumables

Product Name	Nominal Volume	Compatible Rotors
Seal tubes		
1.5PP seal tube	1.5 mL	for Rotor S120AT2, S140AT, S150AT
2PP seal tube	2 mL	for Rotor S120AT2, S120NT, S120VT, S140AT, S140NT, S150AT
4PP seal tube	4 mL	for Rotor S100AT4, S100NT
5PP seal tube	5 mL	for Rotor P100VT, P65NT2, P65VT2, P90NT, S110AT
6PP seal tube	6 mL	for Rotor P80AT, P90AT, S50ST, S58A, S80AT3
6.5PP seal tube	6.5 mL	for Rotor P100AT2, P50AT4
8PP seal tube	8 mL	for Rotor S80AT3
10PP seal tube	10 mL	for Rotor P40ST
12PP seal tube	12 mL	for Rotor P65A, P65NT, P65VT3, P70AT2, P80AT, P90AT, S58A
15PP seal tube	15 mL	for Rotor R25ST2
20PP seal tube	20 mL	for Rotor P70AT, S50A
30PP seal tube	30 mL	for Rotor P50AT2, P70AT, S50A
33PP seal tube	33 mL	for Rotor R25ST
40PP seal tube	40 mL	for Rotor P50AT2, P50VT2, P70AT
94PP seal tube	94 mL	for Rotor P45AT, R14A3
Thick-walled tubes		
0.9PC thick-walled tube	0.9 mL	for Rotor P40ST, P55ST2, P65A, P65ST, P70AT2, P80AT, P90AT, R22A6, S52ST, S58A
3PP thick-walled tube	3 mL	for Rotor S100AT4, S52ST
4PP thick-walled tube	4 mL	for Rotor S110AT
4.7PC thick-walled tube	4.7 mL	for Rotor P100AT2, P45AT, P50AT2, P50AT4, P65A, P70AT, P70AT2, P80AT, P90AT, R21A2, R22A6, R25ST2, S58A
6PC thick-walled tube	6 mL	for Rotor S80AT3
6PP thick-walled tube	6 mL	for Rotor S80AT3
10PC thick-walled tube	10 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R21A2, R22A6, S58A
10PP thick-walled tube	10 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R21A2, R22A6, S58A
11PC thick-walled tube	11 mL	for Rotor R10S, R14A3, R15S3, R17A, R19A, R20A2, R21A, R22A2
11PP thick-walled tube	11 mL	for Rotor R10S, R13A, R14A3, R15S3, R17A, R19A, R20A2, R21A, R22A2
25PC thick-walled tube	25 mL	for Rotor S50A
25PP thick-walled tube	25 mL	for Rotor S50A
33PC thick-walled tube	33 mL	for Rotor P45AT, P50AT2, P70AT, R21A2
33PP thick-walled tube	33 mL	for Rotor P45AT, P50AT2, P70AT, R21A2
Tubes		
0.23PC tube	0.23 mL	for Rotor P42AT, S100AT3
0.23PP tube	0.23 mL	for Rotor P42AT, S100AT3
0.5PC tube	0.5 mL	for Rotor S120AT3, S80AT2
0.5PC tube (B)	0.5 mL	for Rotor S70AT
0.5PP tube	0.5 mL	for Rotor S120AT3, S80AT2
1 mL test tube	1 mL	for Rotor R12A4, R22A4
1PC tube	1 mL	for Rotor S120AT2, S140AT, S150AT, S55S
1PP tube	1 mL	for Rotor S120AT2, S140AT, S150AT
2.2PET tube	2.2 mL	for Rotor S55S
2.2PP tube	2.2 mL	for Rotor S55S
3PC tube	3 mL	for Rotor P45AT, P50AT2, P55ST2, P65A, P65ST, P70AT, P70AT2, P80AT, P90AT, R21A2, R22A6, R25ST2, S100AT4, S52ST, S58A
3PP tube	3 mL	for Rotor P40ST, P65A, P70AT2, P80AT, P90AT, R25ST2, S58A
4PC tube	4 mL	for Rotor S110AT
4PET tube	4 mL	for Rotor P56ST
4PP tube	4 mL	for Rotor P40ST, P50AT2, P56ST, P65A, P70AT, P70AT2, P80AT, P90AT, R25ST2, S58A
5PET tube	5 mL	for Rotor P55ST2, P65ST, S52ST
5PP tube	5 mL	for Rotor P45AT, P50AT2, P55ST2, P65A, P65ST, P70AT, P70AT2, P80AT, P90AT, R25ST2, S52ST, S58A
5TI tube	5 mL	for Rotor S110AT

The maximum capacity refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

Material	Height	Diameter	Packaging Item Quantity	Order no.
polypropylene (PP)	24 mm	11 mm	50	5720411001
polypropylene (PP)	31 mm	11 mm	50	5720411002
polypropylene (PP)	38 mm	13 mm	50	5720411013
polypropylene (PP)	53 mm	13 mm	50	5720411008
polypropylene (PP)	42 mm	16 mm	50	5720411073
polypropylene (PP)	65 mm	13 mm	50	5720411077
polypropylene (PP)	53 mm	16 mm	50	5720411017
polypropylene (PP)	86 mm	15 mm	50	5720411088
polypropylene (PP)	78 mm	16 mm	50	5720411019
polypropylene (PP)	91 mm	16 mm	50	5720411110
polypropylene (PP)	55 mm	26 mm	50	5720411116
polypropylene (PP)	75 mm	26 mm	50	5720411121
polypropylene (PP)	88 mm	26 mm	50	5720411134
polypropylene (PP)	94 mm	26 mm	50	5720411141
polypropylene (PP)	104 mm	38 mm	25	5720411161
polycarbonate	50 mm	8 mm	50	5720411036
polypropylene (PP)	51 mm	13 mm	50	5720411014
polypropylene (PP)	60 mm	13 mm	50	5720411007
polycarbonate	64 mm	13 mm	50	5720411032
polycarbonate	59 mm	16 mm	50	5720411015
polypropylene (PP)	59 mm	16 mm	50	5720411016
polycarbonate	77 mm	16 mm	10	5720411024
polypropylene (PP)	76 mm	16 mm	10	5720411025
polycarbonate	83 mm	16 mm	10	5721411044
polypropylene (PP)	82 mm	16 mm	10	5721411043
polycarbonate	76 mm	26 mm	10	5720411038
polypropylene (PP)	76 mm	26 mm	10	5720411039
polycarbonate	89 mm	26 mm	10	5720411137
polypropylene (PP)	88 mm	26 mm	10	5720411138
polycarbonate	21 mm	7 mm	100	5720411010
polypropylene (PP)	21 mm	7 mm	100	5720411011
polycarbonate	34 mm	8 mm	100	5720411004
polycarbonate	56 mm	7 mm	100	5720411018
polypropylene (PP)	34 mm	8 mm	100	5720411005
glass	35 mm	9 mm	100	5722112042
polycarbonate	34 mm	11 mm	100	5720411000
polypropylene (PP)	34 mm	11 mm	100	5720411003
polyethylene terephthalate	34 mm	11 mm	50	5720411042
polypropylene (PP)	34 mm	11 mm	50	5720411041
polycarbonate	51 mm	13 mm	50	5720411012
polypropylene (PP)	47 mm	11 mm	50	5720411034
polycarbonate	60 mm	13 mm	50	5720411006
polyethylene terephthalate	60 mm	11 mm	50	5720411064
polypropylene (PP)	60 mm	11 mm	50	5720411033
polyethylene terephthalate	52 mm	13 mm	50	5720411043
polypropylene (PP)	52 mm	13 mm	50	5720411031
titanium	60 mm	13 mm	2	5720411273

High-Speed- and Ultracentrifuge Consumables

Product Name	Nominal Volume	Compatible Rotors
Tubes		
6.5PC tube	6.5 mL	for Rotor P100AT2, P45AT, P50AT2, P50AT4, P65A, P70AT, P70AT2, P80AT, P90AT, R25ST2, S58A
6.5PET tube	6.5 mL	for Rotor P100AT2, P45AT, P50AT2, P50AT4, P70AT
6.5PP tube	6.5 mL	for Rotor P100AT2, P45AT, P50AT2, P50AT4, P65A, P70AT, P70AT2, P80AT, P90AT, R25ST2, S58A
7PC tube	7 mL	for Rotor R22A
7PC tube (B)	7 mL	for Rotor S50ST
7PET tube	7 mL	for Rotor S50ST
7PP tube	7 mL	for Rotor S50ST
7PP tube	7 mL	for Rotor R22A
7SST tube	7 mL	for Rotor R22A
10 mL glass tube	10 mL	for Rotor R10A3, R10S, R12A3, R12A6, R13A, R14A, R16A3, R17A, R20A2, R22A2, R3S, R4SS
12PC tube	12 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R10S, R14A3, R15S3, R17A, R19A, R20A2, R22A2, S58A
12PE tube	12 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R10S, R14A3, R15S3, R17A, R19A, R20A2, R22A2, S58A
12PET tube	12 mL	for Rotor P45AT, P50AT2, P65A, P70AT
12PP tube	12 mL	for Rotor P32AT, P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R10S, R14A3, R15S3, R17A, R19A, R20A2, R22A2, S58A
12SST tube	12 mL	for Rotor P45AT, P50AT2, P65A, P70AT, P70AT2, P80AT, P90AT, R10S, R14A3, R15S3, R17A, R19A, R20A2, R21A2, R22A2, R22A6, S58A
12TI tube without cap	12 mL	for Rotor P70AT2, P80AT, P90AT, R22A6, S58A
13PET tube	13 mL	for Rotor P40ST
13PP tube	13 mL	for Rotor P40ST
15 mL glass tube assembly	15 mL	for Rotor R3S, R4SS
16PET tube without cap	16 mL	for Rotor R25ST2
16PP tube	16 mL	for Rotor R25ST2
30PP tube assembly	30 mL	for Rotor S50A
40PC tube	40 mL	for Rotor P28S, P32ST, R25ST
40PE tube	40 mL	for Rotor P45AT, P50AT2, P70AT
40PET tube	40 mL	for Rotor P28S, P32ST, P45AT, P50AT2, P70AT, R25ST
40PP round bottom tube	40 mL	for Rotor P28S, P32ST, P45AT, P50AT2, P70AT, R25ST
40SST tube (B) without cap	40 mL	for Rotor P28S, P32ST, P50AT2, P70AT, R21A2, R25ST
40TI tube without cap	40 mL	for Rotor P50AT2, P70AT, R21A2
50 mL glass tube assembly	50 mL	for Rotor R10A3, R12A3, R12A6, R13A, R14A, R16A3, R3S, R4SS
50PC tube	50 mL	for Rotor R10A3, R10S, R12A3, R12A6, R13A, R14A, R16A3, R17A, R20A2, R22A2, R27A, R30AT
50PP tube	50 mL	for Rotor R10A3, R10S, R12A3, R12A6, R13A, R14A, R16A3, R17A, R20A2, R22A2, R27A, R30AT
50SST tube	50 mL	for Rotor R10A3, R10S, R12A3, R12A6, R13A, R14A, R16A3, R17A, R20A2, R22A2, R27A, R30AT
50TC tube	50 mL	for Rotor R4SS, R8S, R13A, R15A, R16A2, R18A, R19A2
94PC tube	94 mL	for Rotor P45AT
94PP tube	94 mL	for Rotor P45AT
94SST tube	94 mL	for Rotor P45AT, R10A3, R12A3, R12A6, R13A, R14A, R14A3, R16A3, R19A
300SST tube	300 mL	for Rotor R10A3, R12A3, R12A6, R13A, R14A, R16A3, R7S
500PP tube	500 mL	for Rotor R3S
500SST tube	500 mL	for Rotor R10A3, R12A6, R5S2
1.5 mL micro tube (C)	1.5 mL	for Rotor P50A3, S110AT, S55A2, S80AT3
15TC tube	15 mL	for Rotor R15A, R16A2, R18A, R19A2, R8S
50TC tube	50 mL	for Rotor R13A, R15A, R16A2, R16A3, R18A, R19A2, R8S
WATSON microtube 1.5 mL	1.5 mL	for Rotor S100AT4, S110AT, S80AT3

The maximum capacity refers to the nominal volume. The maximum filling volume may depend on the application, rotor and speed. Please consult with your sales representative for further details.

Material	Height	Diameter	Packaging Item Quantity	Order no.
polycarbonate	64 mm	13 mm	50	5720411030
polyethylene terephthalate	64 mm	13 mm	50	5720411080
polypropylene (PP)	64 mm	13 mm	50	5720411029
polycarbonate	61 mm	16 mm	10	5721411038
polycarbonate	52 mm	16 mm	50	5720411045
polyethylene terephthalate	52 mm	16 mm	50	5720411046
polypropylene (PP)	52 mm	16 mm	50	5720411044
polypropylene (PP)	60 mm	16 mm	10	5721411037
stainless steel	61 mm	16 mm	2	5721411039
glass	105 mm	12 mm	50	5721411042
polycarbonate	76 mm	16 mm	50	5720411022
polyethylene	75 mm	16 mm	50	5720411021
polyethylene terephthalate	76 mm	16 mm	50	5720411106
polypropylene (PP)	76 mm	16 mm	50	5720411020
stainless steel	76 mm	16 mm	2	5720411023
titanium	76 mm	16 mm	2	5720411274
polyethylene terephthalate	96 mm	15 mm	50	5720411107
polypropylene (PP)	96 mm	15 mm	50	5720411108
glass	105 mm	16.5 mm	50	5721411050
polyethylene terephthalate	102 mm	16 mm	50	5720411113
polypropylene (PP)	102 mm	16 mm	50	5720411112
polypropylene (PP)	72 mm	26 mm	50	5720411037
polycarbonate	90 mm	26 mm	50	5720411140
polyethylene	89 mm	26 mm	50	5720411146
polyethylene terephthalate	90 mm	26 mm	50	5720411148
polypropylene (PP)	90 mm	26 mm	50	5720411139
stainless steel	90 mm	26 mm	2	5720411147
titanium	90 mm	26 mm	2	5720411149
glass	100 mm	35 mm	10	5721411059
polycarbonate	103 mm	29 mm	10	5721411057
polypropylene (PP)	104 mm	29 mm	10	5721411056
stainless steel	10.2 mm	29 mm	2	5721411058
			100	5721411170
polycarbonate	101 mm	38 mm	25	5720411164
polypropylene (PP)	101 mm	38 mm	25	5720411160
stainless steel	101 mm	38 mm	2	5720411165
stainless steel	128 mm	62 mm	2	5721411063
polypropylene (PP)	108 mm	103 mm	4	5721411064
stainless steel	150 mm	73 mm	2	5721411065
polypropylene (PP)	40 mm	11 mm	300	5720411009
polypropylene (PP)	120 mm	17 mm	100	5721411049
polypropylene (PP)	115 mm	30 mm	300	5721411067
polypropylene (PP)	42 mm	10.8 mm	1,000	5720411052

PCR



Brandnew Mastercycler X40 - Raise Your Standard

Whether your application involves genome editing, NGS library preparation, cloning, or virus detection, a PCR thermocycler is required. Traditional end-point PCR is utilized in virtually every molecular biology laboratory where the need for optimal performance, and fast, reproducible results is crucial.

Key features of a high-quality thermocycler include durability, versatility, speed and throughput. When choosing a cycler based on such characteristics, it is additionally important to think about the block material and configuration. Choose from multiple block configurations utilizing either a silver block with good heat conducting properties for increased speed or traditional aluminum blocks with 96 or 384 wells. We also offer the Mastercycler® nexus X2 with a dual block for running PCR reactions in parallel.

Depending on your lab's needs, you require different vessel types and a cycler that is compatible with both tube and plate formats. Our Mastercycler® X50 and Mastercycler® nexus X2 utilize flexlid® technology that guarantees optimal pressure for a tight seal of your sample plates or tubes in the block to eliminate evaporation. In contrast the new Mastercycler® X40 has a newly developed SafeLid to protect your samples from evaporation in tubes and plates.

For added flexibility and efficiency, the 2D-Gradient of the Mastercycler® X50 enables you to optimize the annealing and denaturation temperature. This enables optimization of specificity and yield by testing 96 temperature combinations in only one PCR run. If you need support for further optimization of your PCR protocols, we have articles that explain the technological background of cycler technology and different ways to improve your PCR.



Connect multiple thermocyclers to increase capacity.

Optimize your PCR set-up

www.eppendorf.link/PCR-productivity

Get all information about the Eppendorf PCR portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/PCR-portfolio

For high throughput or expanding labs, we also offer eco units that can be connected to one main cycler. The Mastercycler® X50 can control up to 9 eco units directly. For even more throughput you may connect up to 50 eco unit devices and conveniently control them via the CycleManager X50 software. With Mastercycler nexus X2 you can connect up to 3 cyclers to increase productivity. Become a digital, connected lab and monitor multiple lab devices with VisioNize®. The touchscreen interface of Mastercycler® X50 and X40 enables using VisioNize® for your digital future. You can manage users, audits and PCR runs easily from the device, a PC or smartphone and tablet.

We also offer distinguished service plans to ensure preventive maintenance of your thermal cycler assessing factors such as temperature block homogeneity. You may also use the temperature verification system TVS-T6 to check the block temperature of your cyclers yourself for minimal device downtime and regular temperature verification.

Learn more about the CycleManager X50 software

www.eppendorf.link/cyclemanager-software



Run two separate PCRs at the same time with Mastercycler® nexus X2



Mastercycler X50 for increased speed and throughput

Download the Mastercycler® family brochure
www.eppendorf.link/PCR-brochure

PCR

PCR consumables



Eppendorf twin.tec® plates are available in different colors.

The Eppendorf twin.tec® PCR plate combines extremely thin-walled polypropylene wells for great heat transfer to the sample with robust polycarbonate frames for high rigidity. With raised well rims, twin.tec plates enable highly effective sealing to reduce the risk of cross-contamination.

The heart of our PCR consumables is the Eppendorf twin.tec® PCR plate. It is available in a 96-well or 384-well format. All of the 96-well plates are offered in three different frame variants: unskirted, semi-skirted and, skirted to fit your instrument to your satisfaction. The plates are also available in standard or LoBind® quality and additional variations such as low profile to suit multiple applications. We also supply a range of PCR tubes, films, foils, tube strips, and cap strips.



Different frame formats of Eppendorf twin.tec® plates: unskirted (top), semi-skirted (middle) and skirted (bottom).

All PCR consumables are made of high-purity plastics and are 'PCR clean'. This means they are batch-tested and certified by an independent laboratory to be free of a range of common PCR contaminants, including DNA, DNAse, RNAse, and PCR inhibitors. Products that are labeled 'forensic DNA grade' fulfill the requirements for ISO 18385.


The special design and manufacturing process results in high precision products. Every single plate is a high-performance component in your workflow offering superior reproducibility.

The plate portfolio also includes plates for real-time PCR with white wells and individually wrapped microbiology plates. Those plates are specially designed for these methods and research areas, helping you to achieve the best possible results.

All Eppendorf Plates are available with customized barcodes.

Plate compatibility
www.eppendorf.link/plate-compatibility

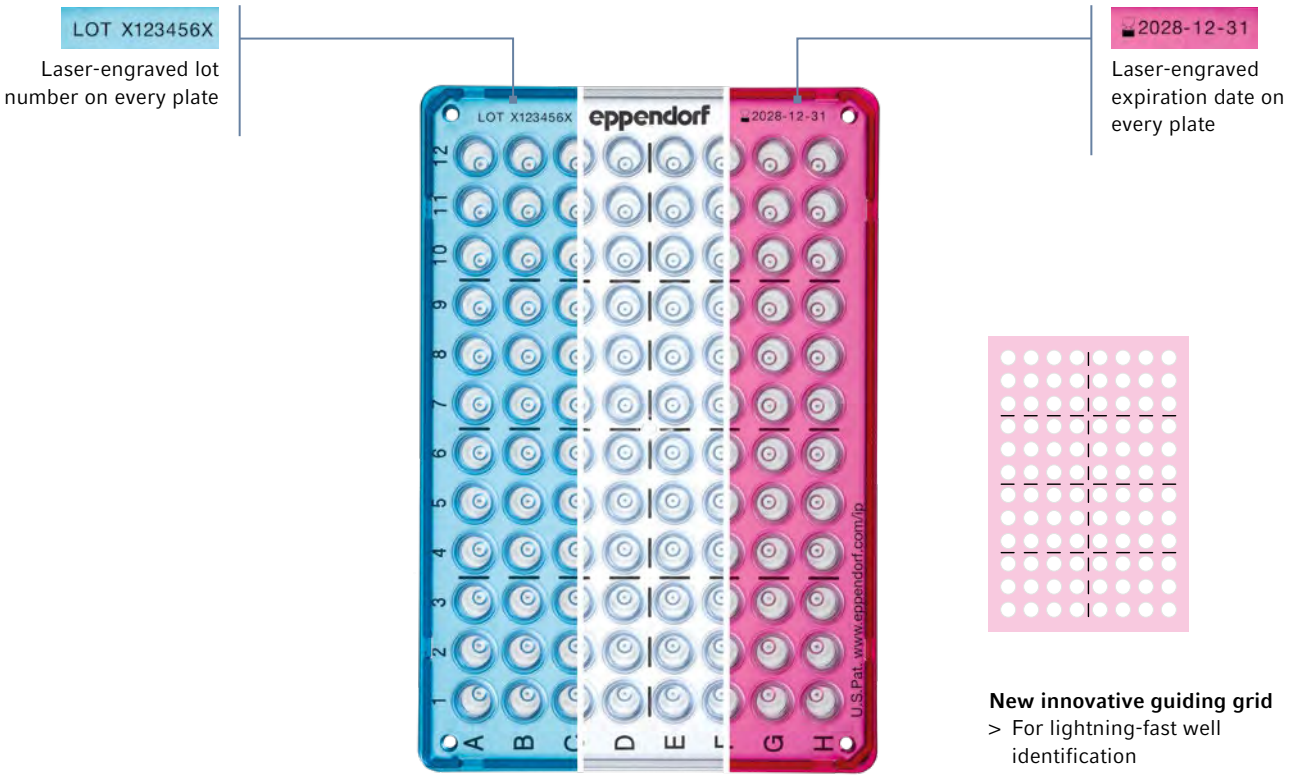Eppendorf twin.tec® Trace PCR Plates



With their laser-engraved lot and expiration date, twin.tec Trace PCR plates are ideally suited for your complex studies, automated high-throughput applications and regulated workflows. They support traceability and documentation for your next audit.

In addition to their high-throughput and compliance features, these microtiter plates come with a laser-engraved optical guiding grid and OptiTrack® matrix that ensure quick well-orientation when you are pipetting manually.

Available in transparent and 2 fresh colors twin.tec Trace plates are ready to deliver optimized performance and reliability for your most demanding workflows!

All Eppendorf twin.tec Trace plates are 'PCR clean', having been batch-tested and certified by an independent and accredited laboratory to be free of a range of common PCR contaminants, including DNA, RNA, DNAse, RNAse, and PCR inhibitors. With these microplates you'll have maximum confidence in your results.

Product features

> Laser-engraved lot number and expiration date on each single plate to improve traceability in your laboratory processes
> Unique laser-engraved optical guiding grid and OptiTrack® matrix for quick orientation when pipetting manually
> One-piece design: combining a polycarbonate frame and polypropylene wells for optimum performance

Get all information about twin.tec Trace
www.eppendorf.link/twintec-Trace

Our Selection – Your Choice








Model	Mastercycler® X50s/ Mastercycler® X50a / Mastercycler® X50h	Mastercycler® X50i/ Mastercycler® X50l / Mastercycler® X50t
Page(s)	**8**	**9**
Dimensions (W × D × H)	**27.5 × 43 × 33 cm / 10.8 × 16.9 × 13 in/**	**27.5 × 43 × 33 cm / 10.8 × 16.9 × 13 in**
2D-Gradient block	over 12 columns and 8 rows/ over 12 columns and 8 rows/ over 24 columns and 16 rows	over 12 columns and 8 rows/ over 12 columns and 8 rows/ over 24 columns and 16 rows
Gradient block	–	–
Heating rate	max. 10 °C/s / max. 5 °C/s / max. 5 °C/s	max. 10 °C/s / max. 5 °C/s / max. 5 °C/s
Cooling rate	max. 5 °C/s / max. 2.3 °C/s / max. 2.3 °C/s	max. 5 °C/s / max. 2.3 °C/s / max. 2.3 °C/s
Interfaces	Ethernet, USB	Ethernet, USB
Lid descent	flexlid® technology with thermal sample protection	flexlid® technology with thermal sample protection
Lid temperature range	37 – 110 °C	37 – 110 °C
Sample capacity	96-well plate or 0.1/0.2 mL tubes / 96-well plate or 0.1/0.2 mL tubes / 384-well plate	96-well plate or 0.1/0.2 mL tubes / 96-well plate or 0.1/0.2 mL tubes / 384-well plate
Gradient temperature control range	30 – 99 °C	30 – 99 °C
Temperature control range of the block	4 – 99 °C	4 – 99 °C
Thermoblock	Silver / Aluminum / Aluminum	Silver / Aluminum / Aluminum
Remote Device Monitoring and Notifications (VisioNize®)	VisioNize® touch enabled/	VisioNize® enabled

[1] measured at the block









Model	Eppendorf twin.tec® Trace PCR Plates/ Eppendorf twin.tec® PCR Plate 96 skirted/ Eppendorf twin.tec® Trace PCR Plates BioBased	Eppendorf twin.tec® PCR Plate 96 semi-skirted/ Eppendorf twin.tec® Trace PCR Plates BioBased	Eppendorf twin.tec® PCR Plate 96 unskirted	Eppendorf twin.tec® PCR Plate 96 unskirted, divisible
Page(s)	**12**	**12**	**12**	**12**
Number of wells	96 wells/96 wells	96 wells	96 wells	96 wells
Total volume per well	150 µL	250 µL	150 or 250 µL	150 or 250 µL
OptiTrack® frame color	colorless yellow green blue red crystal blue fuchsia	colorless yellow green blue red	colorless blue	colorless blue

Get all information about the Eppendorf PCR portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/PCR-portfolio





Mastercycler® X40	Mastercycler® nexus GX2
10	**11**
24.5 × 38.5 × 23 cm / 9.7 × 15.2 × 9.1 in	**25 × 41.2 × 33 cm / 9.8 × 16.2 × 13 in**
–	–
over 12 columns	over 8 rows (0.2 mL)
3.3 °C/s	max. 3 °C/s [1]
1.5 °C/s	max. 2 °C/s [1]
Ethernet, USB	CAN_in/CAN_out, Ethernet, USB
SafeLid with thermal sample protection	flexlid® technology, with thermal sample protection
37 – 110 °C	37 – 110 °C
96-well plate or 0.1/0.2 mL tubes	64/32 × 0.2 mL PCR tubes or up to 24/10 × 0.5 mL PCR tubes
30 – 99 °C	30 – 99 °C
4 – 99 °C	4 – 99 °C
Aluminum	Aluminum
VisioNize® touch enabled	VisioNize® box enabled



Eppendorf twin.tec® PCR Plate 384

12
384 wells
45 µL
colorless
yellow
green
blue
red



Eppendorf twin.tec® Trace PCR Plates

13
96 wells
150 µL
colorless



Eppendorf twin.tec® PCR Plate LoBind®

13	
96 wells	384 wells
150 or 250 µL	45 µL
colorless	colorless
yellow	
green	
blue	
red	

Eppendorf twin.tec® PCR Plate, Forensic DNA Grade

12	
96 wells	384 wells
150 or 250 µL	45 µL
colorless	colorless



Eppendorf twin.tec® 96 *real-time* PCR Plate

14
96 wells
150 or 250 µL
white
blue

epServices for premium performance

You will find detailed information on services for these products in the “Service Products” chapter.

Mastercycler® X50



Shop now for Mastercycler® X50

www.eppendorf.link/Mastercycler-X50

Mastercycler® X50 family overview:

Mastercycler® X50
The Mastercycler® X50 elegantly combines speed, flexibility, and ease of use. With its intuitive touch screen offering precise fingertip control, the MC X50 thermocycler enables easy PCR optimization in advanced molecular biology research and dependable standardization in routine PCR applications. It is also perfectly fitted for NGS.

Mastercycler® X50 eco units
Mastercycler® X50 eco units combine the speed and performance of the master device with the option to be connected to each other. Up to 9 units can be controlled by one master device, while up to 50 eco units can be conveniently controlled with the CycleManager X50 software, even if they are placed in multiple laboratories.

Product features
> Heating rate: up to 10 °C/s depending on block
> Wide selection of blocks from a fast silver block to 384 well block
> Testing of 96/384 different denaturation/annealing temperatures in a single run with temperature gradient function

Applications
> Fast PCR
> PCR optimization
> Standard PCR
> Incubation
> Cycle sequencing

Ordering information

Description	Order no.
Mastercycler® X50s, 100 – 240 V/50 – 60 Hz (EU/JP/TW/US/South America), silver block, 96-well plate or 0.1/0.2 mL tubes, with touchscreen interface	6311000010
Mastercycler® X50a, 100 – 240 V/50 – 60 Hz (EU/JP/TW/US/South America), aluminum block, 96-well plate or 0.1/0.2 mL tubes, with touchscreen interface	6313000018
Mastercycler® X50h, 100 – 240 V/50 – 60 Hz (EU/JP/TW/US/South America), aluminum block, 1 PCR plate 384, high pressure lid, with touchscreen interface	6316000019
Mastercycler® X50i, 100 – 240 V/50 – 60 Hz (EU/JP/TW/US/South America), silver block, 96-well plate or 0.1/0.2 mL tubes, eco unit	6301000012
Mastercycler® X50l, 100 – 240 V/50 – 60 Hz (EU/JP/TW/US/South America), aluminum block, 96-well plate or 0.1/0.2 mL tubes, eco unit	6303000010
Mastercycler® X50t, 100 – 240 V/50 – 60 Hz (EU/JP/TW/US/South America), aluminum block, 1 PCR plate 384, high pressure lid, eco unit	6306000010

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Temperature Verification Systems



Description
Achievement of the right temperature in the PCR thermal cycler block is essential to obtain reliable, reproducible PCR runs. Regular checking of the block temperature is not only essential for the next audit, but gives you the peace of mind for all your PCR experiments.

Product features
> Temperature control and verification of each well of the cycler block
> Multiple sensors for each block-type
> Calibrated in an ISO 9001 certified / ISO/IEC 17025 accredited laboratory

Ordering information

Description	Order no.
Temperature sensor for 96 Well, single channel, ISO 9001	0056001000
Temperature sensor for 96 Well, single channel, ISO 17025	0056001506
Temperature sensor for 384 Well, single channel, ISO 9001	0056002006
Temperature sensor for 384 Well, single channel, ISO 17025	0056002502
Temperature Verification System T6, without thermal sensors, made to order	6328006500
Sensor unit for 96 well blocks, calibrated in an ISO 9001 certified laboratory, made to order	6328007000
Sensor unit for 96 well blocks, calibrated in an ISO/IEC 17025 accredited laboratory, made to order	6328007507
Sensor unit for 384 well blocks, calibrated in an ISO 9001 certified laboratory, made to order	6328008007
Sensor unit for 384 well blocks, calibrated in an ISO/IEC 17025 accredited laboratory, made to order	6328008503
Sensor unit flat, calibrated in an ISO 9001 certified laboratory, made to order	6328009003
Sensor unit flat, calibrated in an ISO/IEC 17025 accredited laboratory, made to order	6328009500

CycleManager X50 Software



Description
Maximize your PCR efficiency. CycleManager X50 enables you to increase your throughput by managing up to fifty Mastercycler X50 eco units simultaneously. Now there's no need for repetitive copying of PCR documentation and parameters, time-consuming searches for an available cycler, or checking the status of your runs on multiple cyclers. Address this bottleneck in your workflow and get full PCR control with CycleManager X50 software.

Ordering information

Description	Order no.
CycleManager X50 Software	6349000014

Mastercycler® X40

Description

Boost academic research – Take your lab to the future with the Mastercycler® X40. Programming is easy with the touchscreen and proven Mastercycler software while monitoring and connectivity with VisioNize® make the PCR cycler ready for your digital lab.

The Mastercycler® X40 enables reliable, stable and reproducible PCR runs on a small footprint. New protocols and primers are no problem with the efficient 12-column gradient for optimization. A convenient heating rate of up to 3.3 °C/s suits also sensitive DNA samples.



Product features

> **Fast PCR optimization:** Testing of 12 different denaturation/ annealing temperatures in a single run with temperature gradient function
> **Compatible with many vessel formats:** 0.1/0.2 mL tubes and tube strips, 96 well plates (low/high profile unskirted, high profile semi-skirted, low profile skirted); SafeLid adjusts to different vessel heights for optimized temperature transfer and evaporation protection
> **For more reproducible results:** high block temperature homogeneity ±0.2 °C (20 – 72 °C) and control accuracy (±0.15 °C); constant 20 °C during warm-up phase of the heated lid reduces thermal load on samples and minimizes formation of non-specific products

Applications

> End-point PCR
> Cycle sequencing
> PCR optimization
> Incubation

ACT. The Environmental Impact Factor Label

Browse the website of the new Mastercycler X40

www.eppendorf.link/raiseyourstandard

Ordering information

Description	Order no.
Mastercycler® X40, 100 – 240 V/50 – 60 Hz (EU/JP/TW/US), aluminum block, 96-well plate or 0.1/0.2 mL tubes, with touchscreen interface	6381000018

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Mastercycler® nexus X2

Description

The Mastercycler® nexus X2 is Eppendorf's solution for busy PCR labs. Two totally independent protocols can be run on the nexus X2 in parallel so two users can start their PCR reactions whenever it fits their schedule. With less than 40 dB[a] noise emission, the nexus X2 PCR cycler is whisper quiet and also very energy efficient.



Product features

> Asymmetrically divided block for running different assays in parallel, one 32-well and one 64-well block
> Intuitive graphic programming
> Universal block for strips, 0.1 mL, 0.2 mL and 0.5 mL PCR tubes and fits for divisible PCR plates

Applications

> Standard PCR
> PCR optimization

Discover its advantages

www.eppendorf.link/Mastercycler-nexus-x2

Ordering information

Description	Order no.
Mastercycler® nexus GX2, 230 V/50 – 60 Hz (EU)	6336000015
Mastercycler® nexus GX2e, 230 V/50 – 60 Hz (EU)	6338000012
Mastercycler® nexus X2, 230 V/50 – 60 Hz (EU)	6337000019
Mastercycler® nexus X2e, 230 V/50 – 60 Hz (EU)	6339000016

Ordering information for other voltage options can be found in the "Voltage Version" chapter.

PCR Consumables and Sealing



Eppendorf twin.tec® PCR Plates
Choose Eppendorf twin.tec® PCR plates for confidence in every PCR assay. twin.tec® plates offer purity, rigidity, color, and other simple, smart features can make your daily life a lot easier. The rigid polycarbonate frame works well in automation and high-throughput processes, and the different colors mean you can quickly organize the different steps of your workflow.

All plates also available as barcoded version.

Ordering information

Description	Order no.
Eppendorf twin.tec® Trace PCR Plate 96, skirted, 150 µL	
PCR clean, colorless, 25 plates	0030129768
PCR clean, crystal blue, 25 plates	0030129776
PCR clean, fuchsia, 25 plates	0030129784
Eppendorf twin.tec® Trace PCR Plate 384, skirted, 45 µL	
PCR clean, colorless, 25 plates	0030129792
Eppendorf twin.tec® PCR Plate 96, skirted, 150 µL	
PCR clean, colorless, 25 plates	0030128648
PCR clean, yellow, 25 plates	0030128656
PCR clean, green, 25 plates	0030128664
PCR clean, blue, 25 plates	0030128672
PCR clean, red, 25 plates	0030128680
Forensic DNA Grade, colorless, 10 plates, individually wrapped	0030129601
Eppendorf twin.tec® PCR Plate 96, semi-skirted, 250 µL	
PCR clean, colorless, 25 plates	0030128575
PCR clean, yellow, 25 plates	0030128583
PCR clean, green, 25 plates	0030128591
PCR clean, blue, 25 plates	0030128605
PCR clean, red, 25 plates	0030128613
Forensic DNA Grade, colorless, 10 plates, individually wrapped	0030129610
Eppendorf twin.tec® PCR Plate 384, skirted, 45 µL	
PCR clean, colorless, 25 plates	0030128508
PCR clean, yellow, 25 plates	0030128516
PCR clean, green, 25 plates	0030128524
PCR clean, blue, 25 plates	0030128532
PCR clean, red, 25 plates	0030128540
Forensic DNA Grade, colorless, 10 plates, individually wrapped	0030129628
Eppendorf twin.tec® PCR Plate 96, low profile, unskirted, 150 µL	
PCR clean, colorless, 20 plates	0030133307
PCR clean, blue, 20 plates	0030133331
Eppendorf twin.tec® PCR Plate 96, unskirted, 250 µL	
PCR clean, colorless, 20 plates	0030133366
PCR clean, blue, 20 plates	0030133390
Eppendorf twin.tec® PCR Plate 96, divisible, unskirted, divisible, 150 µL	
PCR clean, colorless, 20 plates	0030133358
PCR clean, blue, 20 plates	0030133382
Eppendorf twin.tec® PCR Plate 96, divisible, unskirted, divisible, 250 µL	
PCR clean, colorless, 20 plates	0030133374
PCR clean, blue, 20 plates	0030133404
Eppendorf twin.tec® *microbiology* PCR Plate 96, skirted, 150 µL	
PCR clean, colorless, 10 plates	0030129300
PCR clean, blue, 10 plates	0030129318
Eppendorf twin.tec® *microbiology* PCR Plate 96, semi-skirted, 250 µL	
PCR clean, colorless, 10 plates	0030129326
PCR clean, blue, 10 plates	0030129334
Eppendorf twin.tec® *microbiology* PCR Plate 384, skirted, 45 µL	
PCR clean, colorless, 10 plates	0030129342
PCR clean, blue, 10 plates	0030129350

Ordering information

Description	Order no.
Eppendorf twin.tec® PCR Plate 96, skirted, 150 µL	
PCR clean, colorless, 300 plates	0030128770
PCR clean, green, 300 plates	0030128796
PCR clean, yellow, 300 plates	0030128788
PCR clean, blue, 300 plates	0030128842
PCR clean, red, 300 plates	0030128850
Eppendorf twin.tec® PCR Plate 96, semi-skirted, 250 µL	
PCR clean, colorless, 300 plates	0030128869
Eppendorf twin.tec® PCR Plate 384, 45 µL	
PCR clean, colorless, 300 plates	0030128931
PCR clean, yellow, 300 plates	0030128940
PCR clean, green, 300 plates	0030128958
PCR clean, blue, 300 plates	0030128966
PCR clean, red, 300 plates	0030128974



Eppendorf twin.tec® PCR Plates LoBind®
Get the most out of your PCR. Eppendorf's twin.tec® PCR plates LoBind® are specially designed to maximize the yield of your target molecules. LoBind wells are made of polypropylene, with low DNA binding properties, leading to reduced loss of target molecules and higher yields in PCR and other molecular assays.

Ordering information

Description	Order no.
Eppendorf twin.tec® Trace LoBind® PCR Plate 96, skirted, 150 µL	
PCR clean, colorless, 25 plates	0030129822
Eppendorf twin.tec® PCR Plate 96 LoBind®, skirted, 150 µL	
PCR clean, colorless, 25 plates	0030129512
PCR clean, red, 25 plates	0030129598
PCR clean, blue, 25 plates	0030129580
PCR clean, yellow, 25 plates	0030129679
PCR clean, green, 25 plates	0030129660
Eppendorf twin.tec® PCR Plate 96 LoBind®, skirted	
PCR clean, yellow, 300 plates	0030129563
PCR clean, orange, 300 plates	0030129571
PCR clean, green, 300 plates	0030129555
Eppendorf twin.tec® PCR Plate 96 LoBind®, semi-skirted, 250 µL	
PCR clean, colorless, 25 plates	0030129504
Eppendorf twin.tec® PCR Plate 384 LoBind®, skirted, 45 µL	
PCR clean, colorless, 25 plates	0030129547

Learn more about LoBind® technology

www.eppendorf.link/howitworks-lobind

PCR Consumables and Sealing



Eppendorf twin.tec® *real-time* PCR Plates
The white wells of Eppendorf's twin.tec® real-time PCR plates increase the reflection of fluorescent light in real-time PCR (qPCR) and other fluorescence assays. The increased fluorescence from these specialized qPCR plates improves the sensitivity of your assays, while also improving reproducibility and consistency of your results.

Ordering information

Description	Order no.
Eppendorf twin.tec® 96 *real-time* PCR Plate, skirted, 150 µL	
PCR clean, blue, wells white, 25 plates	0030132505
PCR clean, white, wells white, 25 plates	0030132513
Forensic DNA Grade, white, wells white, 10 plates, individually wrapped	0030129636
Eppendorf twin.tec® 96 *real-time* PCR Plate, semi-skirted, 250 µL	
PCR clean, blue, wells white, 25 plates	0030132530
PCR clean, white, wells white, 25 plates	0030132548
Forensic DNA Grade, white, wells white, 10 plates, individually wrapped	0030129644
Eppendorf twin.tec® 96 *real-time* PCR Plate, unskirted, low profile, 150 µL	
PCR clean, white, wells white, 20 plates	0030132700
PCR clean, blue, wells white, 20 plates	0030132718

New



www.eppendorf.link/BioBased

Eppendorf twin.tec® Trace PCR Plates BioBased
The twin.tec® Trace PCR Plates BioBased complete the Eppendorf biobased consumables product portfolio - revalidation of existing protocols when switching from conventional fossil-based twin.tec® Trace PCR Plates is not needed.
They are made for reproducible high-quality results in and provide high rigidity, geometrical consistency, and optimal heat transfer to the sample.
The polymer resins are made from biobased renewable resources following the mass balance approach where fossil oils are substituted by second-generation renewable resources. The resulting biobased polymers are chemically identical to the fossil oil-based polymers and thus show identical superior technical performance as our conventional fossil-based twin.tec® Trace PCR Plates. With laser engraved lot and expiration date, these plates are ideally suited for complex studies, automated high-throughput applications and regulated workflows and support traceability and documentation for audit purpose.

Ordering information

Description	Order no.
Eppendorf twin.tec® Trace PCR Plates 96 BioBased, skirted, 150 µL, PCR clean, colorless, ACT, 25 plates	0030129849
Eppendorf twin.tec® Trace PCR Plates 96 BioBased, skirted, 150 µL, PCR clean, spring green, ACT, 25 plates	0030129857
Eppendorf twin.tec® Trace PCR Plates 96 BioBased LoBind, skirted, 150 µL, PCR clean, colorless, ACT, 25 plates	0030531086
Eppendorf twin.tec® Trace PCR Plates 96 BioBased, semi-skirted, 250 µL, PCR clean, colorless, ACT, 25 plates	0030531043
Eppendorf twin.tec® Trace PCR Plates 96 BioBased LoBind, semi-skirted, 250 µL, PCR clean, colorless, ACT, 25 plates	0030531060
Eppendorf twin.tec® Trace PCR Plates 384 BioBased, skirted, 45 µL, PCR clean, colorless, ACT, 25 plates	0030531051
Eppendorf twin.tec® Trace PCR Plates 384 BioBased LoBind, skirted, 45 µL, PCR clean, colorless, ACT, 25 plates	0030531078

PCR Consumables and Sealing



Eppendorf PCR Tubes

Since 1963, when Eppendorf invented the microcentrifuge tube, Eppendorf tubes have proven to be reliable companions in a scientist's daily work. Eppendorf PCR tubes are easy to open and provide tight sealing to prevent evaporation in PCR. With their thin, consistent wall thickness and smooth wall surface, they also ensure efficient heat transfer to the sample, speeding up your PCR.

Ordering information

Description	Order no.
Eppendorf PCR Tube Strips, 0.1 mL	
PCR clean, without lids (10 × 12 strips)	0030124804
PCR clean, with Cap Strips, domed (10 × 12 strips)	0030124812
PCR clean, with Cap Strips, flat (10 × 12 strips)	0030124820
Eppendorf PCR Tubes, 0.2 mL	
PCR clean, colorless, 1,000 pcs.	0030124332
Forensic DNA Grade, colorless, 500 pcs. (5 bags × 100 pcs.)	0030124707
Eppendorf PCR Tube Strips, 0.2 mL	
PCR clean, 8-tube strips, 120 pcs. (960 tubes)	0030124359
Eppendorf PCR Tubes, 0.5 mL, PCR clean, with hinged lid, clear, 500 pcs.	0030124537



Eppendorf Fast PCR Tube Strips

The Eppendorf Fast PCR Tube Strips are made of polyethylene to transfer heat faster than tubes made of traditional plastics. These PCR strips with caps are particularly suited to fast PCR, for example using fast PCR reagent kits or cyclers with high heating and cooling rates, such as the Mastercycler® X50 family.

Ordering information

Description	Order no.
Eppendorf Fast PCR Tube Strips	
0.1 mL, without lids, PCR clean, 120 pcs. (10 × 12 pcs.)	0030124901
0.1 mL, with cap strips, flat, PCR clean, 120 pcs. (10 × 12 pcs.)	0030124910
0.1 mL, with cap strips, domed, PCR clean, 120 pcs. (10 × 12 pcs.)	0030124928



PCR cap strips

Eppendorf Cap Strips provide easy and rapid sealing of Eppendorf twin.tec® PCR plates, PCR tubes and other standard multiwell plates. Each strip has eight PCR caps for use on 0.1 mL and 0.2 mL wells.
PCR Cap Strips can also be used in real-time PCR (qPCR) assays. In this case it is recommended to use flat capped strips or Masterclear® strips for maximal transparency. If you encounter evaporation and sample loss, domed caps can be used to provide a tighter seal when using a heated lid. Eppendorf Cap Strips can be sterilized by autoclaving for 20 minutes at 121 °C.

Ordering information

Description	Order no.
Cap Strips, 8-strips, domed, 120 pcs. (10 bags × 12 pcs.)	0030124839
Cap Strips, 8-strips, flat, 120 pcs. (10 × 12 pcs.)	0030124847
***real-time* PCR Tube Strips**, without caps, 120 pcs. (10 × 12 pcs.)	0030132882
Masterclear® Cap Strips and *real-time* PCR Tube Strips, 120 pcs. (10 × 12 pcs.)	0030132890
Masterclear® Cap Strip, 120 pcs. (10 × 12 pcs.)	0030132874

PCR Consumables and Sealing



PCR-Cooler
Say goodbye to unstable racks and ice buckets at your bench. The PCR racks are ideal for safe sample transport and storage while the PCR-Cooler is perfect for keeping your samples cold throughout your PCR setup without using ice. Suitable for 0.2 mL and 0.5 mL PCR tubes and for 96-well PCR plates.

Ordering information

Description	Order no.
PCR-Cooler 0.2 mL Starter Set, 1 pink, 1 blue	3881000015
PCR-Cooler 0.2 mL, Pink	3881000023
PCR-Cooler 0.2 mL, Blue	3881000031



PCR-Rack
Handling several PCR tubes or tube strips can be cumbersome. Eppendorf PCR racks are a great help when dealing with numerous 0.1, 0.2, and 0.5 mL tubes and strips. The racks are stackable, can be stored down to -90°C and can be autoclaved.

Ordering information

Description	Order no.
PCR-Rack, assorted colors, 10 pcs.	0030124545



PCR films & foils
Eppendorf PCR films and foils provide effective and airtight sealing for plates to help protect PCR samples during thermal cycling and storage. PCR plate seals offer excellent chemical resistance and have been tested for resistance to a variety of common laboratory substances. Specialized seals with optimal optical properties are available to help minimize signal loss in qPCR.

Ordering information

Description	Order no.
Eppendorf Heat Sealing Film, PCR clean, 100 pcs.	0030127838
Eppendorf Heat Sealing Foil, PCR clean, 100 pcs.	0030127854
Eppendorf PCR Film, self-adhesive, PCR clean, 100 pcs.	0030127781
Eppendorf PCR Foil, self-adhesive, PCR clean, 100 pcs.	0030127790
Masterclear® *real-time* PCR Film, self-adhesive, PCR clean, 100 pcs.	0030132947

HeatSealer



To obtain reliable assay results, PCR plates need to be sealed tightly in a reproducible manner – and the same is true for maintaining sample integrity during storage. The HeatSealers S100 and S200 are user friendly instruments for reliable plate sealing of different plate formats. In combination with our range of adapters, Eppendorf HeatSealers enable you to seal almost any plate.

Ordering information

Description	Order no.
HeatSealer S100, incl. PCR Plate Adapter, 100 – 230 V/50 – 60 Hz (EU)	5391000001
HeatSealer S200, incl. PCR Plate Adapter, 100 – 230 V/50 – 60 Hz (EU)	5392000005
Plate Adapter low profile, for HeatSealer S100	5391070018
Plate Adapter high profile, for HeatSealer S100	5391070034
96-well-PCR Plate Adapter, for HeatSealer S100	5391070026
Plate Adapter high profile, for HeatSealer S200	5392070011
Plate Adapter low profile, for HeatSealer S200	5392070020
96-well Plate Adapter, for HeatSealer S200	5392070038
Eppendorf Heat Sealing Film, PCR clean, 100 pcs.	0030127838
Eppendorf Heat Sealing Foil, PCR clean, 100 pcs.	0030127854

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Freezers

Cold Storage – Protect what Matters



How Much Effort Did You Put into Your Samples?

Did you ever sum up the value of the samples within your freezer? All the hours, days, weeks, months, and costs spent on your samples? More than 50,000 samples fit into a large, standard ULT (also known as ultra-low temperature freezer, -80°C). The value of every single sample differs – from simple buffers to high-value clones, expensive enzymes, or very rare sample material. When predominantly storing high-value samples which are a result of months of work – a single freezer can easily reach a value equal to the load of hundreds of thousands of Euros or dollars.
Your ULT freezer is not just a storage room for samples. This instrument is your assurance for long-term scientific success, securing your work.

Confidence in Quality

Eppendorf has a long-standing history of innovation and quality, and our freezer manufacturing process is no exception. Each Eppendorf ULT freezer is thoroughly inspected to meet our rigorous quality guidelines. The final inspection takes more than 24h and is based on manual and visual technical checks. This process is documented by an individual certificate of quality, completed with serial number, provided as standard for your documentation.
As your expert partner for reliable, high-quality, and efficient storage solutions, Eppendorf finely engineers each freezer with care, using only the high quality materials to ensure a long lasting freezer that offers peace of mind and security. Performance data are based on external test runs of 3 units.
Eppendorf freezers are designed to offer a long-term value over the lifetime of its ownership. You can entrust your valuable samples to our ULT freezers, and you can trust your investment in high quality, reliable, and efficient storage solutions from Eppendorf.


eppendorf

Eppendorf Certificate

Certificate of Quality

Eppendorf Ultra-Low Temperature Freezer

Eppendorf Ultra-Low Temperature Freezers are manufactured in a controlled area and each individual freezer is tested after production. Tests (e.g. pull-down time, condenser, heat exchanger, and cabinet temperature) are performed in a separate area.

Freezer Model: Innova U535 230V 50 Hz
Serial Number: FU35xxxx EXAMPLE ONLY

High stage condenser temperature

Heat exchanger temperature

Chamber temperature

Set point change

The equipment referenced above has been manufactured, tested and inspected in accordance with Eppendorf quality standards.

Dr. Thomas Dichtbauer
Vice President
New Business Lab products

Dr. Birgit Schreiber
Director
Quality Management & Regulatory Affairs

ISO 9001 Certified
ISO 13485 Certified
ISO 14001 Certified

Your local distributor: www.eppendorf.com/contact
Eppendorf SE · Barkhausenweg 1 · 22339 Hamburg · Germany
E-mail: eppendorf@eppendorf.com

Eppendorf® and the Eppendorf logo are registered trademarks of Eppendorf SE, Germany. New Brunswick and the New Brunswick Logo are registered trademarks of Eppendorf, Inc., USA. Registered trademarks and trademarks in the USA and other countries. All rights reserved, including graphics and images. Copyright © 2019 by Eppendorf SE.

www.eppendorf.com

Get all information about the Eppendorf freezer portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/freezer-portfolio

Our Part for Sustainability

> ACT® label (My Green Lab®) partner
> 100% renewable power usage in our production facility
> Production based on high European social and environmental standards
> Environmentally-friendly insulation with green foam, vacuum insulation panels („h"-version), and insulated inner doors for energy efficiency
> Cooling liquids (Hydrocarbons: R170/ R290) with very low global warming potential (GWP) — to comply with the European F-Gas regulation and US SNAP regulations
> Over a decade of experience at Eppendorf with hydrocarbon-based cooling liquids for -80 °C applications in R&D, production, logistics, and service in the field
> Low energy consumption combined with efficient cooling performance and long freezer lifespan that you can rely on

ACT. The Environmental Impact Factor Label

epGreen

Get more information

www.eppendorf.link/sustainability

Digitalization of Cold Storage





Remember Your Last 2 a.m. Wake-up Call?

VisioNize® Lab Suite is your central software solution for effective monitoring and maintenance management to prevent sample storage emergencies. Benefit from 24/7 notification & monitoring for your ULT freezers and high-value stored samples

Independent Temperature Measurement Required?

With VisioNize sense, you can connect non-Eppendorf devices to VisioNize Lab Suite or utilize the sensor system as a second source of validation for monitoring the temperature in your freezer.

Discover how VisioNize® Lab Suite can keep you lab and samples safe
www.eppendorf.link/visionize

Our Portfolio – Your Choice





Model	CryoCube® F740hi, 3 c./ CryoCube® F740hi, 5 c.	CryoCube® F740h, 3c./ CryoCube® F740h, 5c.
Insulation	vacuum insulation paneling / polyurethane foam	vacuum insulation paneling / polyurethane foam
Wall Thickness[1]	type B	type B
Capacity	740 L (26.1 ft^3)	740 L (26.1 ft^3)
No. of internal doors	3	3
No. of compartments	3/5	3/5
Max. racks per freezer	18/30	18/30
Box capacity per rack		
53 mm (2 in) tall boxes	32/16	32/16
76 mm (3 in) tall boxes	20/8	20/8
102 mm (4 in) tall boxes	16/8	16/8
Box capacity per freezer		
53 mm (2 in) tall boxes	576/528	576/528
76 mm (3 in) tall boxes	360/288	360/288
102 mm (4 in) tall boxes	288/264	288/264
Sample capacity		
53 mm (2 in) samples	57,600/52,800	57,600/52,800
Dimensions (W × D × H)[2][3][4]	111 × 98.0 × 197.3 cm / 43.7 × 38.6 × 77.7 in	111 × 91.3 × 197.3 cm / 43.7 × 36 × 77.7 in
Dimensions internal (W × D × H)	86.5 × 62.1 × 139 cm / 34.1 × 24.5 × 54.7 in	86.5 × 62.1 × 139 cm / 34.1 × 24.5 × 54.7 in
Weight w/o accessories	315 kg / 694 lb/333 kg / 734 lb	308 kg / 679 lb/317 kg / 699 lb
Shipping weight	364 kg / 787 lb/382 kg / 806 lb	357 kg / 787 lb/366 kg / 806 lb
Pull-down time to -80 °C[5]	4 h 10 min	4 h 10 min
Noise level	41.3 dB	47.8 dB
Power supply	100 – 230 V, 50/60 Hz	100 – 230 V, 50/60 Hz
Average Daily Consumption (115 V)	11.6 kWh/day	13 kWh/day
Average Daily Consumption (208 V)	10.5 kWh/day	11.8 kWh/day
Average Daily Consumption (230 V)	10.5 kWh/day	11.8 kWh/day
Interior (shelves + chamber)	Stainless steel	Stainless steel
Password protection of parameters	yes	yes
Extras	Automatic vent port	Automatic vent port
Cooling liquid	R290 / R170	R290 / R170
Remote Device Monitoring and Notifications (VisioNize®)	VisioNize® touch enabled	VisioNize® box enabled

[1] Type A: 130 mm (foam), Type B: 80 mm (foam + VIP), Type C: 130 mm (foam + VIP)[2] Optional CO_2/LN_2 backup systems add 8.65 cm/3.5 in to height.[3] To allow for handles and hinges, add 80 mm to width of upright freezers and 110 mm to the depth of chest freezers.[4] Door open adds up to 15 cm.[5] Empty freezer with shelves fitted, upright freezers only, pull down from 20 – 22 °C ambient conditions.

Get all information about the Eppendorf freezer portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/freezer-portfolio







CryoCube® F570h	**CryoCube® F570hw**	**CryoCube® F570n**
vacuum insulation paneling / polyurethane foam	vacuum insulation paneling / polyurethane foam	polyurethane foam
type C	type C	type A
570 L (20.1 ft^3)	570 L (20.1 ft^3)	570 L (20.1 ft^3)
5	5	5
5	5	5
25	25	25
16	16	16
8	8	8
8	8	8
400	400	400
200	200	200
200	200	200
40,000	40,000	40,000
110.3 × 89.8 × 195.0 cm / 43.4 × 35.4 × 76.8 in	110.3 × 89.8 × 195.0 cm / 43.4 × 35.4 × 76.8 in	110.3 × 89.8 × 195.0 cm / 43.4 × 35.4 × 76.8 in
76.5 × 57.5 × 126.5 cm / 30.1 × 22.6 × 49.8 in	76.5 × 57.5 × 126.5 cm / 30.1 × 22.6 × 49.8 in	76.5 × 57.5 × 126.5 cm / 30.1 × 22.6 × 49.8 in
341 kg / 752 lb	341 kg / 752 lb	281 kg / 619 lb
388 kg / 855 lb	388 kg / 855 lb	328 kg / 723 lb
3 h 30 min	3 h 45 min	3 h 50 min
57.7 dBA	56.0 dBA	57.5 dB
230 V, 115 V	230 V	230 V, 208 V, 115 V
7.1 kWh/day		8.8 kWh/day
		8.5 kWh/day
7.4 kWh/day	8.0 kWh/day	8.3 kWh/day
Stainless steel	Stainless steel	Stainless steel
yes	yes	yes
Automatic vent port	Automatic vent port	Automatic vent port
R290 / R170	R290 / R170	R290 / R170
VisioNize® box enabled	VisioNize® box enabled	VisioNize® box enabled

You will find detailed information on services for these products in the “Service Products” chapter.

Our Portfolio – Your Choice





Model	CryoCube® F440h	CryoCube® F440n
Insulation	vacuum insulation paneling / polyurethane foam	polyurethane foam
Wall Thickness[1)]	type C	type A
Capacity	440 L (15.5 ft^3)	440 L (15.5 ft^3)
No. of internal doors	5	5
No. of compartments	5	5
Max. racks per freezer	20	20
Box capacity per rack		
53 mm (2 in) tall boxes	16	16
76 mm (3 in) tall boxes	8	8
102 mm (4 in) tall boxes	8	8
Box capacity per freezer		
53 mm (2 in) tall boxes	320	320
76 mm (3 in) tall boxes	160	160
102 mm (4 in) tall boxes	160	160
Sample capacity		
53 mm (2 in) samples	32,000	32,000
Dimensions (W × D × H)[2)3)4)]	95.5 × 89.8 × 195.0 cm / 37.6 × 35.4 × 76.8 in	95.5 × 89.8 × 195.0 cm / 37.6 × 35.4 × 76.8 in
Dimensions internal (W × D × H)	61.6 × 57.5 × 126.5 cm / 24.3 × 22.6 × 49.8 in	61.6 × 57.5 × 126.5 cm / 24.3 × 22.6 × 49.8 in
Weight w/o accessories	286 kg / 631 lb	267 kg / 589 lb
Shipping weight	327 kg / 721 lb	308 kg / 679 lb
Pull-down time to -80 °C[5)]	3 h 20 min	3 h 35 min
Noise level	51.5 dBA	51.5 dBA
Power supply	230 V, 115 V	230 V, 208 V, 115 V
Average Daily Consumption (115 V)	6.5 kWh/day	8.5 kWh/day
Average Daily Consumption (208 V)		7.9 kWh/day
Average Daily Consumption (230 V)	6.8 kWh/day	8.3 kWh/day
Interior (shelves + chamber)	Stainless steel	Stainless steel
Password protection of parameters	yes	yes
Extras	Automatic vent port	Automatic vent port
Cooling liquid	R290 / R170	R290 / R170
Remote Device Monitoring and Notifications (VisioNize®)	VisioNize® box enabled	VisioNize® box enabled

[1)] Type A: 130 mm (foam), Type B: 80 mm (foam + VIP), Type C: 130 mm (foam + VIP)[2)] Optional CO_2/LN_2 backup systems add 8.65 cm/3.5 in to height.[3)] To allow for handles and hinges, add 80 mm to width of upright freezers and 110 mm to the depth of chest freezers.[4)] Door open adds up to 15 cm.[5)] Empty freezer with shelves fitted, upright freezers only, pull down from 20 – 22 °C ambient conditions.

Get all information about the Eppendorf freezer portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/freezer-portfolio





CryoCube® F101h	**CryoCube® FC660h**
vacuum insulation paneling / polyurethane foam	vacuum insulation paneling / polyurethane foam
type B	type C
101 L (3.6 ft^3)	660 L (23.3 ft^3)
2	
2	
6	40
10	13
6	9
4	7
66	520
36	360
24	280
6,600	52,000
93.6 × 62.9 × 83.4 cm / 36.9 × 24.8 × 32.8 in	207 × 94.5 × 109 cm / 81.5 × 37.2 × 42.9 in
48 × 33 × 64 cm / 18.9 × 13 × 25.2 in	147 × 59 × 76 cm / 57.9 × 23.2 × 29.9 in
123 kg / 271 lb	304 kg / 670 lb
153 kg / 337 lb	379 kg / 836 lb
2 h	2 h 50 min
39.7 dBA	58.3 dBA
230 V, 115 V	230 V
5.1 kWh/day	
4.7 kWh/day	
Stainless steel	Stainless steel
yes	yes
Stackable, fits below bench	30 mm thick inner lids for temp uniformity
R290 / R170	R290 / R170 (208 V: R404A/ R508B)
VisioNize® box enabled	VisioNize® box enabled

You will find detailed information on services for these products in the “Service Products” chapter.

CryoCube® F440 Series



Zero compromise

How often do you open your ULT freezer door each day? For how long? What are the crucial factors for maintaining a steady -80 °C? It is best practice to open and close your freezer as quickly as possible when accessing samples. However, locating and removing the correct sample can take time. The more time it takes, the more the temperature of your frozen samples increases as they are exposed to the warm air flow.

The efficient and reliable compressor systems of CryoCube® F440 series ULT freezers ensure sample protection by guaranteeing fast recovery and pull-down back to -80 °C.

The CryoCube® F440h freezer is based on foam insulation enforced by vacuum insulation panels whereas the CryoCube® F440n is based on foam insulation. As a result, the CryoCube 440h comes with faster pull-down times to -80 °C and a significantly lower power consumption.



For daily usage

> Space for up to 320 boxes (1.5 mL) for your daily sample storage, combined with efficient pull-down and recovery times back to -80 °C
> Hydrocarbon-based cooling and low power consumption of 6.8 KWh/ day for high levels of sustainability
> Technical data based on external test house evaluation for independent validation

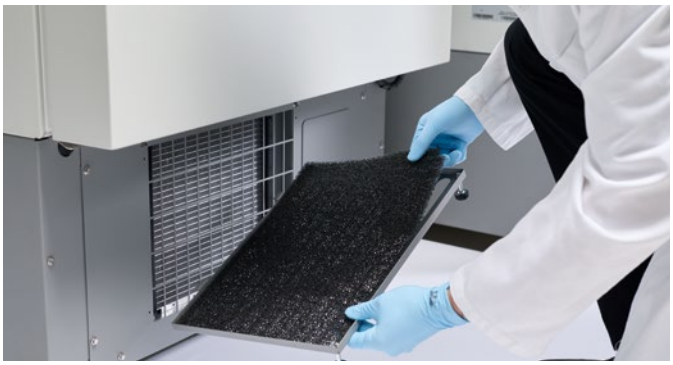
Donwload the Eppendorf freezer family brochure

www.eppendorf.link/freezer-brochure

Technical specifications subject to change.



Easy opening of your freezer requested? Following the PhysioCare Concept®, the CryoCube® ULT freezers have an ergonomic door handle for convenient opening and closing



Filter cleaning needed for your ULT freezer? Simple filter replacement - just open the filter cover and insert a clean filter



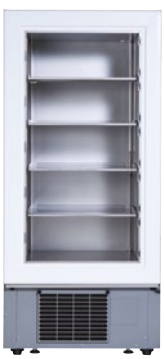
Cleaning your ULT freezer? The inner insulated doors of the CryoCube® freezer can easily be removed to quickly clean and maintain your ULT freezer



Reliable temperature measurement within your ULT freezer requested? All CryoCube® freezers have an integrated probe which is located in the middle compartment for a reliable temperature measurement



Doubled safety for the samples? The built-in temperature probe can be supported by the independent temperature measurement system of VisioNize® sense



Cleaning needed? The CryoCube® F440 ULT freezer is equipped with 5 compartments and a stainless steel chamber for easy cleaning

CryoCube® F740 Series

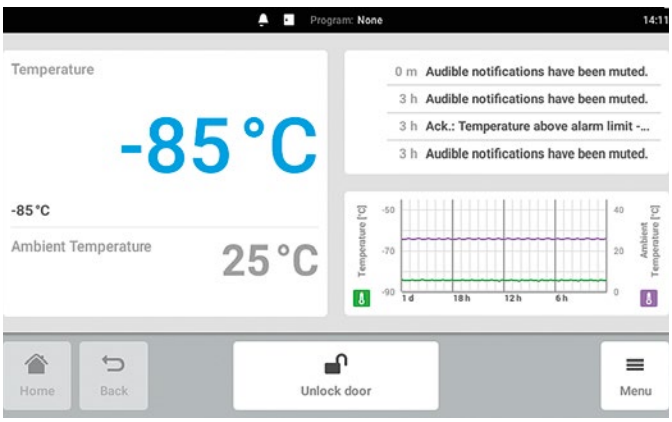


Design the Freezer Around the Sample
The CryoCube® F740 freezer series is smartest member of the Eppendorf ULT Freezer family. Combining the high-quality tradition of our previous freezers with an increased capacity, the CryoCube® F740 series is designed to store more of your samples securely while maintaining optimal energy usage. Fast pull-down and recovery time back to -80°C increase sample safety. The integration of the PhysioCare Concept® during development means that the CryoCube® F740 is easier and more comfortable to use, supports an ergonomic workspace, and enables an optimal workflow in the lab.

Smart Control and Monitoring
Worried about the safety of your high value samples stored in your -80 °C ULT freezer? With the Eppendorf ULT monitoring concept, you can check the freezer performance, monitor and store temperature data and events directly generated from the freezer.

VisioNize® touch interface available on CryoCube® F740hi models
> On-board data storage to keep track of freezer data
> Easily adjust parameters using device touchscreen
> Electronic lock system with user management-

Cloud-based monitoring and instant alert notifications
> Connect to VisioNize® Lab Suite for 24/7 monitoring and instant alert notifications wherever you are
> Track all alert acknowledgements with time-stamped data logs
> Export device parameter, event data and any user interactions



Easy overview required? Quickly review important parameters on the home screen of the CryoCube® F740hi freezer

Discover VisioNize Lab Suite
www.eppendorf.link/visionize

VisioNize Lab Suite

Subscribe and connect up to three devices for free!

Technical specifications subject to change.



Take your pick: 3-compartment or 5-compartment options available (CryoCube® F740 series only)



If you are in a hurry: Automatic vent port enables fast sample access without door vacuum locking (CryoCube® F440/ 570/ 740 series)



Keep it tight: Compact, flat, and flexible outer door seal for optimal insulation of the CryoCube® ULT freezer



Tailored alarm settings needed? The alarm system of the CryoCube® F740hi freezer can be easily adapted to your needs



Double protection: Gaskets at outer door as well as at inner door (CryoCube® F740 series + Innova® series)



Easy access to filter?: Just flip down the cover of CryoCube® F740 series
Silence requested?: Filter position reduces noise level of CryoCube F740 series



Discover the Eppendorf freezer portfolio

www.eppendorf.link/freezer-portfolio

Eppendorf ULT Upright Freezers

Ordering information

Description	Order no.
CryoCube® F740h, 740 L, classic interface, VIP, green cooling liquids, air cooling, handle left side, 3 compartments, 230 V/50/60 Hz (EU)	F740340011
CryoCube® F740h, 740 L, classic interface, VIP, green cooling liquids, air cooling, handle left side, 5 compartments, 230 V/50/60 Hz (EU)	F740340031
CryoCube® F740hi, 740 L, touchscreen interface, VIP, green cooling liquids, air cooling, handle left side, 3 compartments, ACT, 230 V/50/60 Hz (EU)	F740320011
CryoCube® F740hi, 740 L, touchscreen interface, VIP, green cooling liquids, air cooling, handle left side, 5 compartments, ACT, 230 V/50/60 Hz (EU)	F740320031
CryoCube® F570n, 570 L, classic interface, green cooling liquids, air cooling, handle left side, 5 compartments, ACT, 230 V/50 Hz (EU/GB)	F571300031
CryoCube® F570h, 570 L, classic interface, VIP, green cooling liquids, air cooling, handle left side, 5 compartments, ACT, 230 V/50 Hz (EU/GB)	F571340031
CryoCube® F570hw, 570 L, classic interface, VIP, green cooling liquids, water cooling, handle left side, 5 compartments, 230 V/50 Hz (EU/GB)	F571340131
CryoCube® F440h, 440 L, classic interface, VIP, green cooling liquids, air cooling, handle left side, 5 compartments, ACT, 230 V/50 Hz (EU/GB)	F440340031
CryoCube® F440n, 440 L, classic interface, green cooling liquids, air cooling, handle left side, 5 compartments, 230 V/50 Hz (EU/GB)	F440300031
CryoCube® F101h, 101 L, classic interface, VIP, green cooling liquids, air cooling, handle right side, 2 compartments, 230 V/50 Hz (EU)	F101340061

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

➢ For racks please check page 14

Eppendorf ULT Chest Freezers

Ordering information

Description	Order no.
CryoCube® FC660h, 660 L, classic interface, VIP, green cooling liquids, air cooling, ACT, 230 V/50 Hz (EU/GB)	F660320001

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

➢ For racks please check page 14

Freezer Accessories



CO_2 and LN_2 Back-up System

> Equipped with a battery back-up to temporarily protect the contents of your freezer in case of power or system failure
> Available in either liquid CO_2 and LN_2. Liquid CO_2 can maintain temperatures between -50 °C and -70 °C, where as LN_2 can go down to -80 °C
> Both systems can be factory installed with your freezer order or retrofitted on existing models

CO_2 and LN_2 Back-up System for Innova® U101, U360, U535, U725/ -G, C585, C760, CryoCube® F101h and F740 series

Description	Order no.
CO_2 back-up system, 100 V/50 – 60 Hz (JP)	F652999005
LN_2 back-up system, 100 V/50 – 60 Hz (JP), Innova® Green 'G' / F740, LN_2 Backup	F652999006
CO_2 back-up system, 230 V/50 Hz, Innova®, Green 'G', and CryoCube® 740 series, ('narrow')	U9043-0004
LN_2 back-up system, 230 V/50 Hz, Innova®, Green 'G', and CryoCube® 740 series, ('narrow')	U9044-0004

CO_2 and LN_2 Back-up Systems for CryoCube® F440/ F570/ FC660 series, Premium U410, HEF® U410

Description	Order no.
CO_2 back-up system, 120 – 220 V/60 Hz, CryoCube® F440/ F570/ FC660 series, Premium, and HEF®	U9043-0006
CO_2 back-up system, 230 V/50 Hz, CryoCube® F440/F570/FC660 series, Premium, and HEF®	U9043-0008
LN_2 back-up system, 230 V/50 Hz, CryoCube® F440/ F570/FC660 series, Premium, and HEF®	U9044-0008

Freezer Racks

Drawer or side access?
When using racks with drawers, only the drawer with the freezer boxes of interest is pulled out. All other boxes stay in the cold inner area of the ULT freezer. Eppendorf drawers are optimized for smooth movement at -80 °C for ergonomic handling.
When using side access racks, most of the storage boxes have to be pulled out of the cold inner area of the freezer to access the samples. Racks for chest freezers can be equipped with locking rods to secure freezer boxes when pulling out the rack tower.



Stainless steel tower rack for Eppendorf Innova® ULT chest freezers without locking pin: 2.0 in boxes



Rack with locking rod for Eppendorf Innova® ULT chest freezer



Drawer rack for Eppendorf ULT freezer



Side access rack for Eppendorf ULT freezer

Pick your material
Standard freezer racks are available in either stainless steel or aluminum, each with its own benefits.

Stainless steel:
> Stable/robust for longevity and higher capacity
> Fits freezer boxes up to 136 mm × 136 mm for high flexibility regarding boxes
> Special design of drawer racks for optimized cooling conditions and improved sample safety

Aluminum:
> For freezer boxes up to 133 mm × 133 mm
> Non-corrosive anodized aluminum for long-term use

3-compartment or 5-compartment?
The freezer with 3 compartments/ shelves (e.g. Innova® U535) has higher compartments compared to the 5-compartment freezer (e.g. CryoCube® F570 series). Racks of a 5-compartment freezer do fit into a 3-compartment freezer but not vice versa. To get the maximum capacity out of your freezer, the CryoCube® F740 series (3-compartment) can be equipped with "3-compartment MAX" racks. These racks only fit into the CryoCube® F740 series 3-compartment instruments.

Stainless steel racks

Ordering information

Description	Order no.
Freezer Rack: Innova® U101, CryoCube® F101h	
2 in/53 mm, drawer, stainless steel	6001062210
2.5 in/64 mm, drawer, stainless steel	6001062910
3 in/76 mm, drawer, stainless steel	6001062310
4 in/102 mm, drawer, stainless steel	6001062410
5 in/127 mm, drawer, stainless steel	6001062510
2 in/53 mm, side access, stainless steel	6001061210
2.5 in/64 mm, side access, stainless steel	6001061910
3 in/76 mm, side access, stainless steel	6001061310
4 in/102 mm, side access, stainless steel	6001061410
5 in/127 mm, side access, stainless steel	6001061510
MAX freezer rack: CryoCube® F101h	
2 in/53 mm, drawer, stainless steel	6001092210
Freezer Rack: CryoCube® F740 series (3-compartment, Standard), Innova® U360, U535	
2 in/53 mm, drawer, stainless steel	6001012210
2.5 in/64 mm, drawer, stainless steel	6001012910
3 in/76 mm, drawer, stainless steel	6001012310
4 in/102 mm, drawer, stainless steel	6001012410
5 in/127 mm, drawer, stainless steel	6001012510
2 in/53 mm, side access, stainless steel	6001011210
2.5 in/64 mm, side access, stainless steel	6001011910
3 in/76 mm, side access, stainless steel	6001011310
4 in/102 mm, side access, stainless steel	6001011410
5 in/127 mm, side access, stainless steel	6001011510
DWP (53 mm), side access, stainless steel	6001011110
Freezer Rack: CryoCube® F440/ F570 series, CryoCube® F740 series (5-compartment, compartment 1-4), Premium U410, HEF® U410	
2 in/53 mm, drawer, stainless steel	6001022210
2.5 in/64 mm, drawer, stainless steel	6001022910
3 in/76 mm, drawer, stainless steel	6001022310
4 in/102 mm, drawer, stainless steel	6001022410
2 in/53 mm, side access, stainless steel	6001021210
2.5 in/64 mm, side access, stainless steel	6001021910
3 in/76 mm, side access, stainless steel	6001021310
4 in/102 mm, side access, stainless steel	6001021410
DWP (53 mm), side access, stainless steel	6001021110
Freezer Rack: CryoCube® F740 series (5-compartment, MAX for 5th comp.)	
2 in/53 mm, side access, stainless steel	6001081210
2.5 in/64 mm, side access, stainless steel	6001081910
3 in/76 mm, side access, stainless steel	6001081310
4 in/102 mm, side access, stainless steel	6001081410
5 in/127 mm, side access, stainless steel	6001081510
DWP (53 mm), side access, stainless steel	6001081110
2 in/53 mm, drawer, stainless steel	6001082210
2.5 in/64 mm, drawer, stainless steel	6001082910
3 in/76 mm, drawer, stainless steel	6001082310
4 in/102 mm, drawer, stainless steel	6001082410
5 in/127 mm, drawer, stainless steel	6001082510

MAX freezer rack: CryoCube® F101h from H2/2023 and newer

Freezer Racks

Ordering information

Description	Order no.
Freezer Rack: CryoCube® F740 series (3-compartment, MAX)	
2 in/53 mm, side access, stainless steel	6001071210
2.5 in/64 mm, side access, stainless steel	6001071910
3 in/76 mm, side access, stainless steel	6001071310
4 in/102 mm, side access, stainless steel	6001071410
5 in/127 mm, side access, stainless steel	6001071510
DWP (53 mm), side access, stainless steel	6001071110
2 in/53 mm, drawer, stainless steel	6001072210
2.5 in/64 mm, drawer, stainless steel	6001072910
3 in/76 mm, drawer, stainless steel	6001072310
4 in/102 mm, drawer, stainless steel	6001072410
5 in/127 mm, drawer, stainless steel	6001072510

Freezer Rack: CryoCube® F740 series (3-compartment, Standard)

➢ see page 15 at Innova table

Chest freezer racks

Ordering information

Description	Order no.
Freezer Rack: Innova® C585, C760	
2 in/53 mm, side access, stainless steel	6001040210
Freezer Rack: Innova® C585, C760, CryoCube® FC660 series	
2.5 in/64 mm, side access, stainless steel	6001000910
3 in/76 mm, side access, stainless steel	6001000310
4 in/102 mm, side access, stainless steel	6001000410
5 in/127 mm, side access, stainless steel	6001000510
Freezer Rack: Innova® C585, C760	
DWP (53 mm), side access, stainless steel	6001040110
MTP, side access, stainless steel	6001040010
locking rod, 2 in/53 mm, side access, stainless steel	6001040211
Freezer Rack: Innova® C585, C760, CryoCube® FC660 series	
locking rod, 2.5 in/64 mm, side access, stainless steel	6001000911
locking rod, 3 in/76 mm, side access, stainless steel	6001000311
locking rod, 4 in/102 mm, side access, stainless steel	6001000411
Freezer Rack: Innova® C585, C760	
locking rod, DWP (53 mm), side access, stainless steel	6001040111
locking rod, MTP, side access, stainless steel	6001040011

Ordering information	
Description	**Order no.**
Freezer Rack: CryoCube® FC660 series	
2 in/53 mm, side access, stainless steel	6001050210
Freezer Rack: Innova® C585, C760, CryoCube® FC660 series	
2.5 in/64 mm, side access, stainless steel	6001000910
3 in/76 mm, side access, stainless steel	6001000310
4 in/102 mm, side access, stainless steel	6001000410
5 in/127 mm, side access, stainless steel	6001000510
Freezer Rack: CryoCube® FC660 series	
DWP (53 mm), side access, stainless steel	6001050110
MTP, side access, stainless steel	6001050010
locking rod, 2 in/53 mm, side access, stainless steel	6001050211
Freezer Rack: Innova® C585, C760, CryoCube® FC660 series	
locking rod, 2.5 in/64 mm, side access, stainless steel	6001000911
locking rod, 3 in/76 mm, side access, stainless steel	6001000311
locking rod, 4 in/102 mm, side access, stainless steel	6001000411
Freezer Rack: CryoCube® FC660 series	
locking rod, DWP (53 mm), side access, stainless steel	6001050111
locking rod, MTP, side access, stainless steel	6001050011

Aluminum racks

Ordering information	
Description	**Order no.**
Upright freezer rack: Innova® U101, CryoCube® F101h	
10 boxes per rack, 2 in/53 mm, drawer, aluminum	K0641-3003
6 boxes per rack, 3 in/76 mm, drawer, aluminum	K0641-3004
4 boxes per rack, 4 in/102 mm, drawer, aluminum	K0641-3005
Chest freezer rack: Innova® C585, C760, CryoCube® FC660 series	
13 boxes per rack, 2 in/53 mm, side access, aluminum	K0641-1690
9 boxes per rack, 3 in/76 mm, side access, aluminum	K0641-1700
6 boxes per rack, 4 in/102 mm, side access, aluminum	K0641-1750
Upright freezer rack: CryoCube® F740 series (3-compartment), Innova® U360, U535	
28 boxes per rack, 2 in/53 mm, drawer, aluminum	K0641-3000
20 boxes per rack, 3 in/76 mm, drawer, aluminum	K0641-3001
12 boxes per rack, 4 in/102 mm, drawer, aluminum	K0641-3002
Upright freezer rack: U410 series, CryoCube® F440/ F570 series, CryoCube® F740 series (5-compartment)	
16 boxes per rack, 2 in/53 mm, drawer, aluminum	K0641-1900
12 boxes per rack, 3 in/76 mm, drawer, aluminum	K0641-1890
8 boxes per rack, 4 in/102 mm, drawer, aluminum	K0641-1880

K0641-1890, optimal for cardboard boxes of lower height

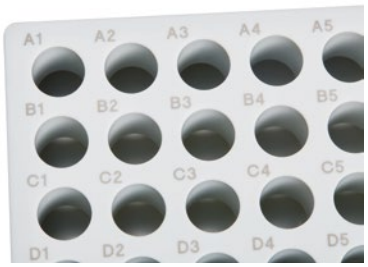
Eppendorf Storage Boxes



In need of resilient options for long-term storage?
The Eppendorf Storage Boxes are a durable system solution for sample storage. The outer footprint dimensions (133 mm) are compatible with common freezer rack systems. The different inner grids provide a perfect fit for typical tube formats: cryogenic tubes, microcentrifuge tubes, conical tubes (5 mL, 15 mL,25 mL, and 50 mL), and other laboratory vessels. This space-saving approach helps to optimize your storage and archiving of samples.



Product features
> Made of polypropylene (PP) for high stability in freezing applications and smooth opening and closing
> For freezing to -86 °C
> High-contrast permanent alphanumeric marking of each location through laser labeling enables easy sample identification and minimizes risk of sample mix-up



Ordering information

Description	Order no.
Storage Box 10 × 10, freezer box, for 100 cryogenic tubes w. int. thread, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140508
Storage Box 9 × 9, freezer box, for 81 screw cap (cryog.) tubes 1 – 2 mL, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140516
Storage Box 9 × 9, freezer box, for 81 screw cap (cryog.) tubes 3 mL, 2 pcs., height 76 mm, 3 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140540
Storage Box 9 × 9, freezer box, for 81 screw cap (cryog.) tubes 4 – 5 mL, 2 pcs., height 102 mm, 4 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140567
Storage Box 8 × 8, freezer box, for 64 tubes 1 – 2 mL, 3 pcs., height 53 mm, 2 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140524
Storage Box 5 × 5, freezer box, for 25 tubes 5 mL, 4 pcs., height 64 mm, 2.5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140532
Storage Box 5 × 5, freezer box, for 25 tubes 5 mL screw cap, 2 pcs., height 76 mm, 3 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140613
Storage Box 5 × 5, freezer box, for 25 tubes 15 mL, 2 pcs., height 127 mm, 5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140583
Storage Box 3 × 3, freezer box, for 9 tubes 25 mL, 2 pcs., height 89 mm, 3.5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140729
Storage Box 3 × 3, freezer box, for 9 tubes 50 mL and 4 tubes 15 mL, 2 pcs., height 127 mm, 5 in, polypropylene, for freezing to -86 °C, autoclavable, with lid and alphanumeric code	0030140591

Freezer Cardboard Boxes and Dividers

Looking for basic freezer boxes for storage?
Water-resistant cardboard boxes are a cost-effective solution to safely organize and store your samples at -80°C. The freezer boxes fit into both models of ULT freezers, upright as well as chest lab freezers.





Product features
> White freezer cardboard boxes with water resistant coating are ideal for sample storage at 4 °C, –20 °C, or –86 °C
> Freezer boxes are available in 53 mm (2 in), 76 mm (3 in), and 102 mm (4 in)
> Freezer box dividers are available in 7 x 7, 8 x 8, 9 x 9, and 10 x 10

Ordering information

Description	Order no.
Freezer cardboard box, white, 1 box	
2 in/ 53 mm tall	6001500220
3 in/ 76 mm tall	6001500310
4 in/ 102 mm tall	6001500410
Freezer cardboard box divider, white, 10 pcs	
7 × 7, 17 mm max. tube diameter, holds 49 tubes, 30 mm tall	6001505710
7 × 7, 17 mm max. tube diameter, holds 49 tubes, 65 mm tall	6001507710
8 × 8, 15 mm max. tube diameter, holds 64 tubes, 30 mm tall	6001505810
8 × 8, 15 mm max. tube diameter, holds 64 tubes, 65 mm tall	6001507810
9 × 9, 13 mm max. tube diameter, holds 81 tubes, 30 mm tall	6001505920
9 × 9, 13 mm max. tube diameter, holds 81 tubes, 65 mm tall	6001507920
10 × 10, 11.8 mm max. tube diameter, holds 100 tubes, 30 mm tall	6001505120
10 × 10, 11.8 mm max. tube diameter, holds 100 tubes, 65 mm tall	6001507120

Eppendorf SafeCode System

Safe sample identification needed?
Missing data are mainly realized during retrospective review. "I should have taken more notes" is probably one of the most frequently uttered phrases in science. Particularly in the case of consumables, all relevant information about the lot/batch, type of product, or purity grade is printed on the outer box. This, together with all the important information about the product, is usually the first to be disposed of, while the tubes with the corresponding samples are stored for years.

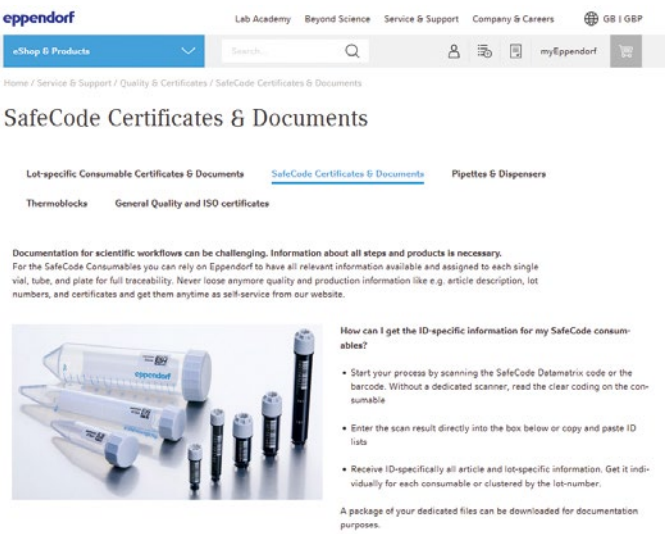
The SafeCode system solves these problems: The precoded consumables are prelabeled with a DataMatrix code and a clear code, encoding one specific kind of serial-number for each individual consumable. This identifier provides far more reliable sample identification than self-generated labels and provides access to the special vessel information mentioned above as well as certificates. These data sets can be downloaded from the Eppendorf website.












Documentation required?
For certification purposes, more and more users need to document every piece of information. Vessels are a major part of the workflow within the lab. Therefore, further information about Eppendorf consumables with SafeCode are available via the Eppendorf website. Based on the individual vial or tube code you can get:
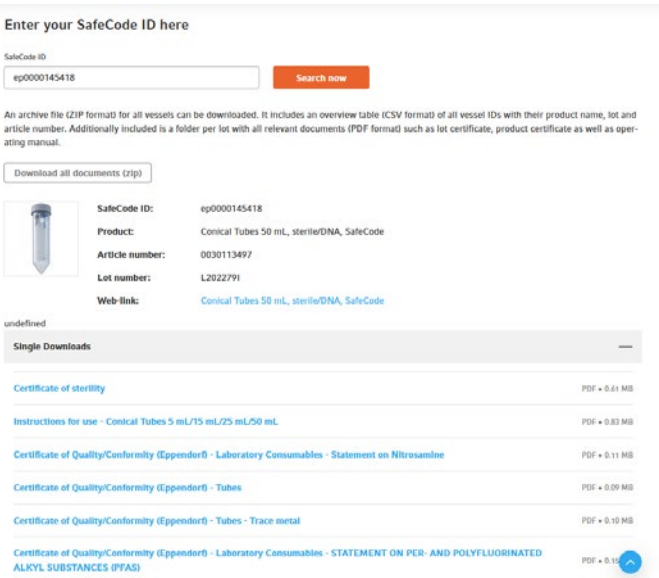
> Lot number
> Order number
> Certificates



Check the SafeCode system

www.eppendorf.link/SafeCode

Eppendorf CryoStorage Vials (barcoded)



Scanning labels of 20 vials in a row?
The SafeCode system for Eppendorf CryoStorage Vials is based on a 3-level coding to enable safe sample identification. Up to 96 pre-labeled vials are pre-racked and pre-capped for convenient usage.



Product features
> 3-level coding for safe sample identification
> ECC 200 error correction function enables safe code reading with up to 25 % damaged codes
> Temperature range: -196 °C (gas phase of LN_2) to +121 °C

Ordering information

Description	Order no.
Eppendorf CryoStorage Vial, 0.5 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 960 vials (10 racks × 96 vials), individually packed racks	0030079400
Eppendorf CryoStorage Vial, 1.0 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 960 vials (10 racks × 96 vials), individually packed racks	0030079418
Eppendorf CryoStorage Vial, 1.5 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 480 vials (10 racks × 48 vials), individually packed racks	0030079426
Eppendorf CryoStorage Vial, 2.0 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 480 vials (10 racks × 48 vials), individually packed racks	0030079434
Eppendorf CryoStorage Vial, 4.0 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 480 vials (10 racks × 48 vials), individually packed racks	0030079442
Eppendorf CryoStorage Vial, sterile, 0.5 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 960 vials (10 racks × 96 vials), individually packed racks	0030079450
Eppendorf CryoStorage Vial, sterile, 1.0 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 960 vials (10 racks × 96 vials), individually packed racks	0030079469
Eppendorf CryoStorage Vial, sterile, 1.5 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 480 vials (10 racks × 48 vials), individually packed racks	0030079477
Eppendorf CryoStorage Vial, sterile, 2.0 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 480 vials (10 racks × 48 vials), individually packed racks	0030079485
Eppendorf CryoStorage Vial, sterile, 4.0 mL, free of DNase, RNase, human DNA, endotoxin; external thread, pre-capped gray, with 2D SafeCode (DataMatrix/ECC200), linear and human readable code, 480 vials (10 racks × 48 vials), individually packed racks	0030079493

Eppendorf RackScan



Scanning more than one sample at a time?
The Eppendorf RackScan provides you a number of solutions to scan samples tubes with datamatrix (2D) codes. The Eppendorf RackScan b scans data from the bottom of the vessels. The instrument can also be equipped with the „s“ accessory to read side-labeled barcodes.
Data can be exported in different formats for downstream software applications.

Product features
> Camera based instrument resulting in rapid imaging and decoding
> Comfortable and easy plug-in system
> Small footprint, ideal for benchtop (and integration)

Ordering information

Description	Order no.
Eppendorf RackScan s, code scanner for side reading of SBS racks and cryostorage boxes, accessory for the RackScan b, /50 – 60 Hz	6002000014
Eppendorf RackScan b, scanner (bottom reading) for 2D-coded tubes in SBS racks and cryostorage boxes, incl. software RackScan Analyzer, 100 – 240 V ±10 %/50 – 60 Hz (EU)	6002000006

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

SafeCode Tubes and Plates

How often do you puzzle about tube labels while working at the bench?
A clean and stable label on the side or top of the vessel can make scientific life so much easier. Eppendorf tubes and plates are available with SafeCode - a well-designed barcoding system. Take advantage of the pre-labeled and durable 2-level coding of the SafeCode system (datamatrix code and clear coding) to enable safe sample identification. The plates provide a linear barcode, printed on 3 sides for highest flexibility. The safe sample ID is supported by online information about the dedicated consumable.
These sets of vessels expand your safe sample management solution from the existing SafeCode CryoStorage Vials at -80 °C storage for complete security in your daily work at the bench.

New



Small volumes required? Eppendorf SafeCode tubes provide volume classes of 1.5, 2.0 mL, and 5.0 mL



Process documentation required?
Identify your Eppendorf tube by SafeCode ID



Product features
> 2-level coding for safe sample identification
> ECC 200 error correction function enables safe code reading with up to 25 % damaged codes
> Temperature range: -86 °C to +121 °C



Safe sample identification needed? Eppendorf SafeCode provides reliable sample IDs for safe identification





Documentation for high-throughput applications needed? Eppendorf SafeCode provides reliable material documentation like certificates via the vessel ID

Documenting every step of your PCR? Eppendorf SafeCode provides a broad range of documents based on the vessel ID

SafeCode Tubes

Ordering information

	Description	Order no.
New	**Eppendorf Safe-Lock Tubes®**, 1.5 mL, 2D SafeCode (barcoded), PCR clean, colorless, 500 tubes (5 bags × 100 tubes)	0030113403
New	**Eppendorf Safe-Lock Tubes®**, 2.0 mL, 2D SafeCode (barcoded), PCR clean, colorless, 500 tubes (5 bags × 100 tubes)	0030113446
New	**Eppendorf Tubes® 5.0 mL**, 5.0 mL, 2D SafeCode (barcoded), snap-cap, PCR clean, colorless, 200 tubes (2 bags × 100 tubes)	0030113462
	Eppendorf Tubes® 5.0 mL, 5.0 mL, 2D SafeCode (barcoded), sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, 200 tubes (2 bags × 100 tubes)	0030113500
	Eppendorf Conical Tubes, 15 mL, 2D SafeCode (barcoded), sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 500 tubes (10 bags × 50 tubes)	0030113489
	Eppendorf Conical Tubes, 50 mL, 2D SafeCode (barcoded), sterile, pyrogen-, DNase-, RNase-, human and bacterial DNA-free, colorless, 500 tubes (20 bags × 25 tubes)	0030113497

SafeCode Plates

Ordering information

Description	Order no.
Deepwell Plate 96/500 µL, wells clear, 500 µL, 2D SafeCode, PCR clean, white, 40 plates (5 bags × 8 plates)	0030113543
Deepwell Plate 96/1000 µL, wells clear, 1,000 µL, 2D SafeCode, PCR clean, white, 20 plates (5 bags × 4 plates)	0030113535
Deepwell Plate 96/2000 µL, wells clear, 2,000 µL, 2D SafeCode, PCR clean, white, 20 plates (5 bags × 4 plates)	0030113527
Deepwell Plate 384/200 µL, wells clear, 200 µL, 2D SafeCode, PCR clean, white, 40 plates (5 bags × 8 plates)	0030113551
Eppendorf twin.tec® PCR Plate 96/150 µL, skirted, wells colorless, 150 µL, 2D SafeCode, PCR clean, colorless, 25 plates (5 bags × 5 plates)	0030113560
Eppendorf twin.tec® PCR Plate 384/45 µL, skirted, wells colorless, 45 µL, 2D SafeCode, PCR clean, colorless, 25 plates (5 bags × 5 plates)	0030113578
Eppendorf twin.tec® PCR Plate 96/150 µL, skirted, wells colorless, 150 µL, 2D SafeCode, PCR clean, blue, 25 plates (5 bags × 5 plates)	0030113624
Eppendorf twin.tec® PCR Plate 96/150 µL, skirted, wells colorless, 150 µL, 2D SafeCode, PCR clean, green, 25 plates (5 bags × 5 plates)	0030113616
Eppendorf twin.tec® PCR Plate 96/150 µL, skirted, wells colorless, 150 µL, 2D SafeCode, PCR clean, red, 25 plates (5 bags × 5 plates)	0030113632
Microplate 96/V, wells clear, 350 µL, 2D SafeCode, RecoverMax® well design, PCR clean, white, 80 plates (5 bags × 16 plates)	0030113586
Microplate 384/V 140 µL, wells clear, 140 µL, 2D SafeCode, RecoverMax® well design, PCR clean, white, 80 plates (5 bags × 16 plates)	0030113594


Cell Incubation



CO_2 incubators, service products, and digital lab management from Eppendorf



The CO_2 incubator is the home of your cells and a key device in every cell culture lab. Therefore, it is crucial that a CO_2 incubator provides **optimized and stable growth conditions** to ensure a high degree of reproducibility for your culturing results – even for sensitive cells. Fast atmosphere recovery rates after door openings without setpoint overshoot, uniformity of the atmosphere inside the CO_2 incubator chamber, and protection from vibrations and air turbulence are important features to consider and are all parts of the Eppendorf CO_2 incubator lineup. Eppendorf also offers various CO_2 incubator service products like IQ/OQ or preventive maintenance. These services are conducted by experienced Eppendorf service technicians to help you to **continuously achieve reproducible results and prepare for internal or external audits**. Furthermore, **comprehensive and centralized documentation** of incubation conditions (e.g. alerts and events), as well as **management of a device fleet** (e.g. customizable tasks or service reminders) are provided by our VisioNize® Lab Suite for a growing number of devices from Eppendorf.



In addition to optimized growth conditions, a CO_2 incubator must provide a **high degree of contamination protection and should be as easy to clean**. Eppendorf CO_2 incubators have a fanless incubator design that leaves no space for contaminants to hide and omits the need for internal fan-associated HEPA-filters. Fast and easy cleaning are ensured by a deep-drawn, seamless incubator chamber, few internal parts that are dissembled and quickly cleaned, and integrated high temperature disinfection (HTD). Furthermore, options for additional protection like copper interior or segmented inner doors are available for selected CO_2 incubators.



Often underestimated, running costs of CO_2 incubators can add significantly to a cell culture lab's total expenses. Main factors include, for example, costs for regular replacement of internal parts like fan-associated HEPA-filters, costs related to gas consumption (incl. gas costs, labor costs for replacing cylinders, CO_2 incubator downtime during changes etc.), costs for lost lab space due to low usable space vs. footprint ratio, or costs for insufficient future flexibility. Eppendorf CO_2 incubators support cell culture labs to **reduce the running costs** and to **achieve corporate carbon footprint reduction goals**.

Get all information about the Eppendorf CO_2 incubator portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/CO2-incubators-portfolio



CO_2 Incubator Service

Qualification, regular maintenance, and calibration of your CO_2 incubator are key to ensure reproducible results and easy audits at any time. Our trained Eppendorf service technicians will help you to continuously achieve this with preventive maintenance, IQ/OQ or extended warranty.



Smart cultivation with VisioNize® Lab Suite

Are you interested in monitoring your lab devices and receiving notifications e.g., for device alerts? A digital, connected lab offers even more.
VisioNize Lab Suite offers everything you need as a lab manager or scientist to get started to digitally manage your lab for increased sample security, compliance needs and maintenance management. Gain access to a modular range of digital services and choose what works for your lab.



Inside Cell Culture Newsletter

You are experienced in cell culture and want to keep expanding your knowledge? Are you looking for resources to improve your trainings? Then our "Inside Cell Culture" Newsletter is just perfect for you.

> Tips and tricks to improve your daily work
> Free videos, downloads, posters and more
> Access to advanced educational webinars
> Teaching support resources
> Upcoming events and trainings

Discover your service options

www.eppendorf.link/epservices

Discover VisioNize® Lab Suite

www.eppendorf.link/visionize

Sign up now

www.eppendorf.link/icc

VisioNize Lab Suite

Subscribe and connect up to three devices for free!

Our Portfolio – Your Choice





Model	CellXpert® C170i	CellXpert® C170
Positioning	Large (170 L) CO_2 incubator with many options for demanding cell culture applications (e.g. copper interior or field upgradeable O_2 control)	Basic version of the C170i
Page(s)	**6**	**9**
Capacity	170 L	170 L
Dimensions (W × D × H)	71.8 × 71.5 × 90.0 cm / 28.3 × 28.1 × 35.4 in	71.8 × 71.5 × 90.0 cm / 28.3 × 28.1 × 35.4 in
Dimensions internal (W × D × H)	53.9 × 44.5 × 69.2 cm / 21.2 × 17.5 × 27.2 in	53.9 × 44.5 × 69.2 cm / 21.2 × 17.5 × 27.2 in
Weight w/o accessories	113 kg / 249 lb	113 kg / 249 lb
Benchtop (B), Under Bench (U), Floor (F) or Stackable (S)	B, U, F, S (x2)	B, U, F, S (x2)
Display	color touch screen	softkey operated LCD display
High temperature disinfection (HTD)	180 °C	140 °C
Sealed inner glass doors	yes	yes
Segmented door options	4/8 segments (factory & in-field upgradeable)	4- (factory-installed)/8-segments (in-field upgrade)
Temperature range	Ambient +4 °C to 50 °C	Ambient +4 °C to 50 °C
Temperature control increment	±0.1 °C	±0.1 °C
Temperature stability at 37 °C	±0.1 °C	±0.1 °C
Temperature uniformity	±0.3 °C	±0.3 °C
Temperature accuracy	±0.4 °C	±0.4 °C
CO_2 range	0.1 – 20 %	0.1 – 20 %
CO_2 control increment	±0.1 %	±0.1 %
CO_2 stability at 5 % CO_2	±0.1 %	±0.1 %
CO_2 uniformity	±0.1 %	±0.1 %
O_2 control	1 – 20 % optional (upgradeable in-field later)	–
Number of shelves (standard/max)	4/8	3 (4 with 4-segmented door)/8
Copper options	water tray, shelves	water tray, shelves
Access port	2	2
On-board data logging	yes	no
Data export interface	USB, Ethernet, VisioNize®	Ethernet
Water/Humidity monitoring	optional	–
BMS relay	yes	yes
Remote Device Monitoring and Notifications (VisioNize®)	VisioNize® touch enabled	VisioNize® box enabled

Get all information about the Eppendorf CO_2 incubator portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/CO2-incubators-portfolio

New





CellXpert® CS220	**New Brunswick S41i**
High-capacity, stackable (2-3x) CO_2 incubator shaker with 180 °C sterilization routine	Medium-sized, versatile and 2x stackable CO_2 shaker – ideal for growing labs
10	**12**
224 L	170 L
131.8 × 80.5 × 67.3 cm / 51.9 × 31.7 × 26.5 in	87.5 × 73 × 85 cm / 34.4 × 28.7 × 33.5 in
102.5 × 58.0 × 38.5 cm / 40.4 × 22.8 × 15.2 in	69.1 × 44.4 × 53.8 cm / 27.2 × 17.5 × 21.2 in
240 kg / 529 lb	154 kg / 340 lb
F, S (x3)	U, F, S (x2)
color touch screen	touchscreen interface
180 °C	120 °C
no	yes
–	–
Ambient +8 °C to 60 °C	Ambient +4 °C to 50 °C
±0.1 °C	±0.1 °C
±0.1 °C (ambient temperature 22 °C) °C	±0.1 °C
±0.3 °C at 37 °C	±0.25 °C at 37 °C (in flask media)
±0.4 °C at 37 °C	±0.2 °C
0.1% - 20 %	0.2 – 20 %
0.1 %	±0.1 %
±0.1 %	±0.2 %
±0.1 %	±0.1 %
–	–
–	1/2
–	–
1	1
yes	data display (no data log or export)
USB, Ethernet, VisioNize®	Ethernet
–	–
yes	yes
VisioNize® touch enabled	VisioNize® box enabled

epServices for premium performance

You will find detailed information on services for these products in the "Service Products" chapter.

CellXpert® C170i

Description
Cell culture incubator CellXpert® – Culture of Tomorrow

Are you looking for a 170 L cell culture incubator that is easy to clean and delivers optimized growth conditions, even for your sensitive cells? The GMP/GLP-compatible CellXpert C170i is more than just that. It also helps to reduce the running costs of your lab significantly and it provides flexibility for different future lab setups and applications – with many in-field upgradeable options.



Product features

- **Easy cleaning and disinfection:** Seamless chamber, easy disassembling in 40 s, removable water tray
- **Certified, effective contamination protection:** 180 °C High temperature disinfection (HTD) with protocol, no internal fan-associated HEPA filters necessary
- **Uniform temperature:** Innovative heating concept with four temperature sensors at various locations - verified at 27 locations inside the incubator
(German DIN 12880:2007-05)

See the Video:
Easy cleaning


www.eppendorf.link/
Video-Contamination-Prevention



Full control and easy documentation with the intuitive user interface.



The removable water tray is easy to clean and refill.



There is no place for contaminants to hide in the seamless chamber.

	C170i	C170
Display	VisioNize® touch interface, onboard data log	Standard display
High temperature disinfection	180 °C standard (protocol downloadable)	140 °C standard
O_2 control (optional)	1-20 % (upgradeable in-field later)	–
In-field upgradeable options	> O_2 control > 4/8-segmented inner door > humidity monitoring > water level monitoring > door handle position	> 4/8-segmented inner door > door handle position
Inner door latch	magnetic, dual way	magnetic, single way
VisioNize® Lab Suite	touch enabled	box enabled
VisioNize® device management software including: User management, Performance charts, HTD-wizard, Customized tasks, Remote monitoring, Notifications	standard	optional
USB port	2 (front)	no



White Paper: Save costs with the CellXpert

www.eppendorf.link/cut-costs

Ordering information

Segmented door options	Door handle	O_2 control	Water/Humidity monitoring	Order no.
1 segment	right	–	no	6731000011
1 segment	right	–	humidity monitoring	6731000111
1 segment	right	–	water-level monitoring	6731000211
1 segment	right	–	water and humidity monitoring package	6731000311
1 segment	right	1 – 20 %	no	6731001011
1 segment	left	–	no	6731000021
1 segment	left	–	humidity monitoring	6731000121
1 segment	left	–	water-level monitoring	6731000221
1 segment	left	–	water and humidity monitoring package	6731000321
1 segment	left	1 – 20 %	no	6731001021
4 segments	right	–	no	6731000041
4 segments	right	–	water and humidity monitoring package	6731000341
4 segments	right	1 – 20 %	no	6731001041
4 segments	right	1 – 20 %	water and humidity monitoring package	6731001341
4 segments	left	–	no	6731000051
4 segments	left	–	water and humidity monitoring package	6731000351
4 segments	left	1 – 20 %	water and humidity monitoring package	6731001351
4 segments	left	1 – 20 %	no	6731001051
8 segments	right	1 – 20 %	no	6731001081
8 segments	left	1 – 20 %	no	6731001091

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

CellXpert® C170/C170i shelves, water trays and stacking stand

Description	Order no.
Door lock, for CellXpert® C170i CO_2 incubators, retrofittable, no service required	6731070166
Stacking stand, lower frame, with castors	6731070093
Stacking stand, upper frame	6731070085
Universal stacking stand, upper frame, CellXpert with other 170 L CO_2 incubators	6731070158
Safety fastening kit	6710070235
Set of copper water tray and 4 copper shelves for 170 L incubators	6731080013
Copper water tray, for 170 L incubators	P0628-6260
Copper shelves, for 170 L incubators, 2 pcs.	6710859106
Shelves, for 170 L incubators, 2 pcs.	6710859009
Shelf, for 170 L CO_2 incubators, stainless steel, 1 piece	6731070123
Shelf rack for 8 shelves, for 170 L incubators	P0628-6390
Water tray, for 170 L incubators	P0628-6140
Door damper kit for CellXpert®	6731070115

CellXpert® C170

Description
The C170 is the basic version of the C170i. It comes with the same uniform atmosphere, fast recovery, cleanability, high usable space but for example with a simpler user interface and less in-field upgradeable options. Use the flyer “C170i vs. C170” to find the right device for your needs.





The CellXpert C170i and C170 are stackable with CO_2 incubators of Thermo Scientific®, PHCbi (former Panasonic) and more with the Universal Stacking Kit

Product features
- **Easy cleaning and disinfection:** Seamless chamber, easy disassembling in 40 s, removable water tray
- **Effective contamination protection:** 140 °C High temperature disinfection (HTD), no internal fan-associated HEPA-filters necessary
- **Uniform temperature:** Innovative heating concept with four temperature sensors at various locations - verified at 27 locations inside the incubator (German DIN 12880:2007-05)

C170i or C170? Find the right CellXpert for your needs.

www.eppendorf.link/C170i-C170

Ordering information

Description	Order no.
CellXpert® C170, non-segmented inner door, handle right side, 220 – 240 V/50 – 60 Hz (EU)	6734000011
CellXpert® C170, inner door with 4 door segments, handle right side, 220 – 240 V/50 – 60 Hz (EU)	6734000041

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

For Accessories see page 13

CellXpert® CS220

Do you want to accelerate your research while minimizing the risk of costly delays for your mammalian suspension cultures? Discover the only CO_2 incubator shaker in the market with an integrated 180 °C sterilization and an outstanding capacity-to-footprint ratio. Learn more about the cost- and time-saving features that will help your team remain focused on the tasks critical to your success.

New



Product features

> **Up to 40 % higher flask capacity:** e.g., 8x 5 L Corning®/ Thomson Optimum Growth®, 25x 1 L / 42x 500 mL / 102x 125 mL Erlenmeyer flasks (on sticky pad)
> **180 °C sterilization routine integrated:** incl. wizard and downloadable performance protocol; no locally restricted UV-airflow/surface-disinfection
> **Stainless steel chamber:** Hygienic design according to EN ISO 14159:2008 standard plus only few internal parts and no drive wheel, crevices, cables or heating fins inside

Applications

Expansion of mammalian cells in suspension e.g., CHO or HEK293 for:

> Protein expression
> Screening
> Cell line development
> Early process development
> Viral vector production in mammalian cells e.g., Ad, AAV, LV
> Bioreactor inoculum preparation

MSC/iPSC-cultivation in normoxic conditions e.g., microcarrier-based for reprogramming or exosome production



Seamless stainless steel chamber
No room for contaminants to hide



Glide-up door and slide-out platform save space and ensure easy experiment setup, cleaning and service



Save costs: Touch interface, slide-out platform, rH-control, access port, and sterilization routine are always included in the product package

Technical specifications subject to change.

Ordering information

Description	Order no.
CellXpert® CS220, 224 L, CO_2 incubator shaker	
non-refrigerated, stackable up to 3-fold, 220 – 240 V ±10 %/50 – 60 Hz (EU), orbit 2.5 cm (1 in), Please order separately: platform, clamps, sticky pads, storage base or feet, water supply package; Optional: 1-2 stacking kits and water tank holder	6740211010
non-refrigerated, stackable up to 3-fold, 220 – 240 V ±10 %/50 – 60 Hz (DK), orbit 2.5 cm (1 in), Please order separately: platform, clamps, sticky pads, storage base or feet, water supply package; Optional: 1-2 stacking kits and water tank holder	6740211060
non-refrigerated, stackable up to 3-fold, 220 – 240 V ±10 %/50 – 60 Hz (EU), orbit 5.1 cm (2 in), Please order separately: platform, clamps, sticky pads, storage base or feet, water supply package; Optional: 1-2 stacking kits and water tank holder	6740212010
non-refrigerated, stackable up to 3-fold, 220 – 240 V ±10 %/50 – 60 Hz (DK), orbit 5.1 cm (2 in), Please order separately: platform, clamps, sticky pads, storage base or feet, water supply package; Optional: 1-2 stacking kits and water tank holder	6740212060
Universal platform, CellXpert CS220, resistant to 180 °C sterilization, 93.0 x 51.3 cm (36.6 x 20.2 in), anodized aluminum, compatible with sticky pads: 8 necessary to cover platform (sold separately, order no: M1250-9700, no cutting required) , includes 25 x screws for CS220 clamps and 25x screws for microplate/test tube rack	6740070012
Lab shaker clamp, CellXpert CS220	
for 100 – 125 mL Erlenmeyer flasks (standard, narrow/wide neck), 125 mL Corning®/ Thomson®/ Nalgene®, 180 °C resistant, autoclavable, stainless steel, incl. M4x7 screws	6740070152
for 200 – 250 mL Erlenmeyer flasks (standard, narrow/wide neck), 250 mL Corning®/ Thomson®/ Nalgene®, 180 °C resistant, autoclavable, stainless steel, incl. M4x7 screws	6740070160
for 500 mL flasks: Erlenmeyer flasks (standard, narrow/wide neck) / Corning®/ Thomson®/ Nalgene®, 180 °C resistant, autoclavable, stainless steel, incl. M4x7 screws	6740070179
for 1 L flasks: Erlenmeyer (standard, narrow/wide neck) / Corning®/ Thomson®/ Nalgene®, 180 °C resistant, autoclavable, stainless steel, incl. M4x7 screws	6740070187
for 2 L flasks: Erlenmeyer (standard, narrow neck) / Cornin®/ Thomson®/ Nalgene®, 180 °C resistant, autoclavable, stainless steel, incl. M4x7 screws	6740070195
for 2.8 L Fernbach flasks e.g., 2.8 L Nalgene®, 180 °C resistant, autoclavable, stainless steel, incl. M4x7 screws	6740070209
for 5 L Erlenmeyer (standard, narrow neck), 3/5 L Corning®, 5 L Thomson® , 180 °C resistant, autoclavable, stainless steel, incl. M4x7 screws	6740070225
Storage base, CellXpert CS220, 65 cm (25.6 in) height, for single device only, adjustable feet for levelling, allows easy cleaning below device and access with standard forklift to move devices, Eppendorf service required for installation	6740070055
High feet, 9 cm (3.5 in), CellXpert CS220, 1 fixed and 3 height-adjustable, for single device or 2-3x stack, for easy cleaning below device and access with standard forklift to move devices, 9 cm/3.5 in minimal feet height, Eppendorf service required for installation	6740070039
Low feet, 2 cm (0.8 in), CellXpert CS220, 1 fixed and 3 height-adjustable, for easiest access to top device in 3x stack , Eppendorf service required for installation	6740070020
Stacking kit, CellXpert CS220, 2x stack: 1 kit, 3x stack: 2 kits necessary, Eppendorf service required for installation	6740070047
Water supply package, CellXpert CS220, 1 package suitable for single device or 2x/3x stack, Includes 1 water tank 5L (autoclavable), 1 tank venting filter (0.2 µm pore size), 1 adaptor for tubing connection, 3 water tubings, 1 tubing weight, 3 water filters (35 µm pore size); order water tank holder separately	6740070080
Water tank holder, CellXpert CS220, For water tank 5L (674070.071)	6740070098
Water tank & adaptors, CellXpert CS220, Includes 1 water tank 5L (autoclavable), 1 tank venting filter (0.2 µm pore size), 1 tubing weight, 1 adaptor for tubing connections	6740070071
Water tubing package, CellXpert CS220, Includes 1 water tubing, 1 water filter (35 µm pore size)	6740070063
Sticky pad, 20 × 20 cm (8 × 8 in), Compatible platform or adapter kit necessary	M1250-9700

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Find test tube racks and microplate racks on page 14 of the shaker chapter, spare parts on page 13.

Discover the new CellXpert CS220

www.eppendorf.link/accelerate-your-growth

New Brunswick S41i

Description

Are you looking for a CO_2 incubator shaker with integrated high temperature disinfection (120 °C) and significantly reduced gas consumption? Make cleaning easy and change CO_2 cylinders less often with the fanless and stackable New Brunswick S41i.



Product features

> Experimental flexibility: Perforated shelf allows for static incubation at the same time as shaking
> Stable, uniform and vibration-free shaking: robust Innova triple eccentric drive
> Saves gas and provides an optimal growing atmosphere: Smart gas control (0.2 - 20% CO_2)

Applications

> Culturing of suspension cells requiring gentle agitation
> Protein expression
> Adherent cells such as stem cells that require both incubation and periodic gentle shaking

Download flyer

Incubator Shaker Evolution

www.eppendorf.link/
flyer-incubator-shaker-evolution

Ordering information

Description	Order no.
New Brunswick S41i, 170 L, CO_2 incubator shaker with inner shelf and touch screen control, 1 shelf, stackable up to 2-fold, 1 (2. optional) shelves, 230 V/50/60 Hz (EU), orbit 2.5 cm (1 in)	S41I230011
Universal platform for New Brunswick S41i, 36 × 61 cm (14 × 24 in), compatible with sticky pads: 5 necessary to cover platform (sold separately, order no: M1250-9700, cutting required), anodized aluminum	M1334-9920
Interchangeable platform for New Brunswick S41i, 36 × 61 cm (14 × 24 in)	
125 mL Erlenmeyer flask dedicated platform, comes complete with 32 clamps installed	M1334-9921
250 mL Erlenmeyer flask dedicated platform, comes complete with 24 clamps installed	M1334-9922
500 mL Erlenmeyer flask dedicated platform, comes complete with 15 clamps installed	M1334-9923
1 L Erlenmeyer flask dedicated platform, comes complete with 11 clamps installed	M1334-9924
2 L Erlenmeyer flask dedicated platform, comes complete with 6 clamps installed	M1334-9925
Stacking kit, allows up to 2 each New Brunswick S41i shakers to be stacked one on top of the other	P0628-6502
Additional shelf for New Brunswick S41i, perforated, can easily be added for static cell culture of adherent cells	P0628-6181
Sticky pad, 20 × 20 cm (8 × 8 in), Compatible platform or adapter kit necessary	M1250-9700

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Additional Accessories and Spare Parts



For stacking kits see individual CO_2 incubator pages.

White paper:
Guide to copper in CO_2 incubators

www.eppendorf.link/copper-CO2-incubators

Ordering information

Description	Order no.
HEPA filter 25 mm	P0628-5060
In-line gas filter, 2 pcs.	6710070251
Automatic gas cylinder CO_2 changeover unit	P0628-5000
Temperature probe, 100 mm tip for gas analyzer	P0628-7880
Temperature probe, 5 mm tip for gas analyzer	P0628-7881
Gas tubing, CellXpert C170/C170i/CS220, Spare part, for CO2-/N2-supply and dehumidification, 3 m, with in-line gas filter, ID/OD: 6.5 mm/10 mm	6731070107
Blind plug, 1 pcs, spare part	6740850050
BMS connector, CellXpert CS220, 2 channels, spare part	6740070101
Screw kit for clamps, CellXpert CS220, Includes 25 pcs M4 x 7 screws (PH-type, countersunk head), for CellXpert CS220 platform	6740070250
Screw kit for test tube and microplate racks, CellXpert CS220, Includes 25 pcs M4 x 6 screws (PH-type, button head), for CellXpert CS220 platform	6740070268

Lab Shakers



Incubated lab shakers

If the growth atmosphere needs to be controlled (e.g. temperature and photosynthetic light) and medium or high throughput is needed, an incubated lab shaker is necessary. Usually, incubated lab shakers are grouped based on any of the following criteria:
Temperature control:
> Cooling for a minimum of 4 °C
> Heating for a maximum of 80 °C
> Speed range (25 – 500 rpm)
> Position in the lab (Benchtop, under bench or stackable floor models)
> Stackability (2- or 3-fold)
> Capacity and throughput: Vessel type, size and capacity
> Mode of loading (front vs. top loading)
> CO_2 control
> Photosynthetic light

Lab Shaker Service

Qualification, regular maintenance, and calibration of your lab shaker are key to ensure reproducible results and easy audits at any time. Our trained Eppendorf service technicians will help you to continuously achieve this with preventive maintenance, IQ/OQ or extended warranty.

Smart shaking with VisioNize® Lab Suite

Are you interested in monitoring your lab shakers and other devices? What about receiving notifications e.g., for device alerts? A digital, connected lab offers even more.
VisioNize Lab Suite offers everything you need as a lab manager or scientist to get started to digitally manage your lab for increased sample security, compliance needs and maintenance management. Gain access to a modular range of digital services and choose what works for your lab.

Discover your service options
www.eppendorf.link/epservices

Discover VisioNize® Lab Suite
www.eppendorf.link/visionize

Lab Shaker Accessories

Eppendorf offers a wide range of accessories for lab shakers to provide full flexibility for your processes.



Lab shaker platforms

Different lab shaker platforms are available to provide you with the right balance between vessel capacity, vessel type flexibility, handling speed, and regarding necessary shaking speeds:
> Dedicated platforms
> Universal platforms
> Sticky pad platforms

Universal platforms are the best choice when a high degree of vessel type flexibility is needed, e.g. to mix different vessel types and sizes. These platforms come with multiple screwing holes that allow virtually any combination of lab shaker clamps and other accessories. Dedicated platforms are used when just one flask size will be used and high capacity is needed. Dedicated platforms come complete with clamps installed. Adhesive mats called sticky pad can be used as an alternative to clamps for flat bottom vessels. Sticky pads are re-usable and require an anodized aluminum platform for best performance. Thus, sticky pads are compatible with universal platforms of New Brunswick S41i and Innova® S44i. All other shakers require a sticky pad adapter kit for universal platforms or a dedicated sticky pad platform.



Flask clamps for lab shakers

Eppendorf flask clamps for lab shakers are made of a single piece stainless-steel construction (not spot welded or riveted) for added strength and safety. All flask clamps come with coiled wire springs for added safety and stability at higher shaking speeds. Flasks clamps for 2-, 2.8-, 4- and 6 L and higher volumes come with an extra girdle for added security and noise reduction.

Available clamps for lab shakers:
> Erlenmeyer flask clamps (10 mL – 6 L)
> 2.8 L Fernbach flask clamps
> 500 mL and 1 L media bottles
> 450 mL or 600 mL TPP bioreactors
> 2 L Lauber Thomson flask clamps



Test tube racks and microplate racks for lab shakers

Eppendorf offers 18 different racks for various test tubes with diameters between 8 – 30 mm. Racks come with an adjustable angle (to optimize media oxygenation), tube height-support, and are made of stainless-steel with specialized inserts. These inserts help to retain tubes and prevent them from spinning in the shaker rack.

Two different racks for microplates are available: for stacks (three deep-well plates or nine standard plates) or single layers (five plates). In addition, universal lab shaker platforms are also compatible with microplate screening systems like the Duetz System.

Get all information about the Eppendorf lab shaker portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/shakers-portfolio

Our Portfolio – Your Choice







Model	Innova® S44i	Innova® 44/44R	Innova® 42/42R
Page(s)	**6**	**8**	**10**
Positioning	Most advanced stackable (2-3x) incubator shaker with highest capacity in our portfolio	Stackable (2-3x) incubator shaker with high vessel capacity	Space-saving, stackable (2x) incubator shaker with high versatility
Capacity	extra large	large	medium
Platform size (cm/in)	76 × 62 cm (30 × 24 in)	76 × 46 cm (30 × 18 in)	46 × 46 cm (18 × 18 in)
Max. vessel volume (without static shelf, depending on flask format)	5 L	5 L	6 L
Application-related features			
Bacteria, Yeast, Fungi, Insect cells	yes	yes	yes
Algae/plant cells	yes (LED-light, tunable intensity to simulate day/night-cyles)	yes (fluorescent bulbs, no intensity modulation)	yes (fluorescent bulbs, no intensity modulation)
Mammalian cells (CO_2 control and humidification)	no	no	no
Parallel static cultivation	yes (static shelve optional)	no	yes (one static shelve included, culture drawer for Agar plates optional)
Orbit	2.5/5.1 cm (1/2 in)	2.5/5.1 cm (1/2 in)	1.9/2.5 cm (0.75/1 in)
Temperature range	Incubated: 10 °C above ambient to 80 °C; Refrigerated: 15 °C below ambient (min. 4 °C) to 80 °C.	Incubated: 10 °C above ambient to 80 °C; Refrigerated: 20 °C below ambient (min. 4 °C) to 80 °C (max. 70 °C with PS-light, 60 °C with rH-monitoring).	Incubated: 10 °C above ambient to 80 °C; Refrigerated: 20 °C below ambient (min. 4 °C) to 80 °C (max. 70 °C with PS-light, 60 °C with rH-monitoring).
Speed range	2.5 cm orbit: 20 – 400 rpm, 5.1 cm orbit: 20 – 300 rpm	25 – 400 rpm with 2.5 cm orbit; 25 – 300 rpm with 5.1 cm orbit or 2 stacked units; 25 – 250 rpm with 3 stacked units	25 – 400 rpm; 25 – 300 rpm when using flasks > 500 mL in stacked devices
Lab position and stackability			
Lab position	floor	floor	floor, under/on bench
Stackability	up to 3-fold	up to 3-fold	up to 2-fold
Handling, ergonomics, programmability			
Door opening	glide up	glide up	opening to front
Platform type	slide out	slide out	fixed
Programming steps / storable programs	unlimited/unlimited	15/4	15/4
Drive mechanism	Eppendorf X-Drive	triple-eccentric counterbalanced drive	triple-eccentric counterbalanced drive
Dimensions (W × D × H)	118.2 × 86.9 × 63 cm / 46.5 × 34.2 × 24.8 in	134.9 × 84.3 × 66 cm / 53.1 × 33.2 × 26 in	63.5 × 74.5 × 81.8 cm / 25 × 29.3 × 32.8 in

Get all information about the Eppendorf lab shaker portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/shakers-portfolio

New







Innova® 40/40R	**CellXpert® CS220**	**New Brunswick S41i**
12	**Cell Incubation page 10**	**Cell Incubation page 12**
Benchtop orbital shaker with compact design and capacity for flasks with a volume up to 3 L	High-capacity, stackable (2-3x) CO_2 incubator shaker with 180 °C sterilization routine	Medium-sized, versatile and 2x stackable CO_2 shaker – ideal for growing labs
medium	extra large	medium
46 × 46 cm (18 × 18 in)	51.4 × 93 cm (20.2 × 36.6 in)	36 × 61 cm (14 × 24 in)
3 L	5 L	4 L
yes	no	no
no	no	no
no	yes	yes
no	no	yes (static shelve included)
1.9/2.5 cm (0.75/1 in)	2.5/5.1 cm (1/2 in)	2.5 cm (1 in)
Incubated: 10 °C above ambient to 80 °C; Refrigerated: 15 °C below ambient (min. 4 °C) to 80 °C.	8 °C above ambient to 60 °C	Ambient +4 °C to 50 °C
25 up to 500 rpm (depending on load)	20 – 300 rpm with 2.54 cm (1 in) orbit, 20 – 250 rpm with 5.1 cm (2 in) orbit	25 – 400 rpm (stacked: 25 - 250/400 rpm for top/ bottom unit)
benchtop	floor	floor, under bench
non-stackable	up to 3-fold	up to 2-fold
top opening hood	glide up	opening to front
fixed	slide out	fixed
15/4	–	–
triple-eccentric counterbalanced drive	Eppendorf X-Drive	triple-eccentric counterbalanced drive
55.9 × 76.2 × 61 cm / 22 × 30 × 24 in	131.8 × 80.5 × 66.1 cm / 51.9 × 31.7 × 26.0 in	87.5 × 73 × 85 cm / 34.4 × 28.7 × 33.5 in

epServices for premium performance

You will find detailed information on services for these products in the “Service Products” chapter.

Innova® S44i



Description
Do you need a stackable incubator shaker for the highest plasmid or protein yields in a small footprint to quickly reach your ambitious targets? The latest and most advanced incubator shaker from Eppendorf, the Innova S44i, can fit up to twice as many flasks as other shakers in the market and is ready to reliably support current high-yield expression protocols at high speeds, 24/7.

Product features
> **For higher plasmid or protein quantities:** Up to twice as many flasks as other shakers (e.g. 15x/13x 2.5 L UltraYield™ or 39/36x 1 L Erlenmeyer flasks on dedicated/universal platform); 2x/3x stackable
> **Ready for high-speed expression protocols:** Up to 400 rpm (orbit 25 mm/1 in) in all devices of a triple stack
> **True control with touch interface:** All setpoints and current values are visible at a glance; Restrict access to change settings with user management

Applications
> Grow bacteria, yeast, fungus, photosynthetic organisms
> Plasmid DNA production and protein expression
> Process optimization and media development
> Media screening and optimization
> Seed cultures for bioprocess scale-up
> Biofuel research
> Food quality testing

VisioNize Lab Suite

Subscribe and connect up to three devices for free!

See the video: Innova® S44i fully loaded

www.eppendorf.link/s44i-fully-loaded



Eppendorf X-Drive: The five eccentric mounting points for the shaker platform are precisely engineered to ensure long-lasting, repeatable performance for years to come. The four shafts in the corners and Balance Master Technology support precise vibration-free shaking on every point of the platform, including the periphery.



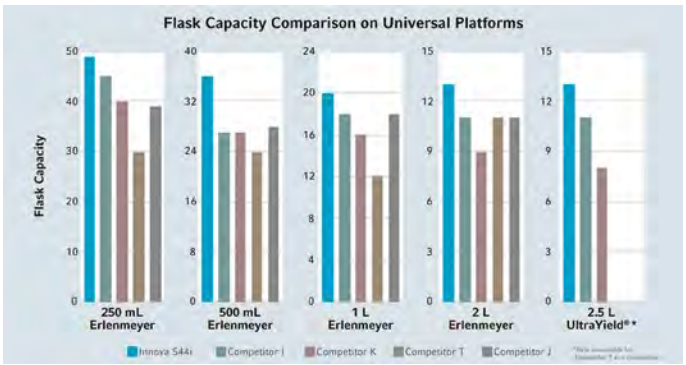
Glide up door: saves lab space and makes cleaning easier



All parameter at a glance



The Innova S44i is also available with a photosynthetic LED light bank for the growth of algae or plant cells.



Compare your Innova® S44i now

www.eppendorf.link/s44i-comparison

Ordering information

Description	Order no.
Innova® S44i, non-refrigerated, stackable up to 3-fold, 230 V/50/60 Hz (EU), orbit 2.5 cm (1 in)	S44I300001
Innova® S44i, refrigerated, stackable up to 3-fold, 230 V/50/60 Hz (EU), orbit 2.5 cm (1 in)	S44I310001
Innova® S44i, refrigerated, stackable up to 3-fold, 230 V/50/60 Hz (EU), orbit 2.5 cm (1 in), photosynthetic LED light bank	S44I311001
Innova® S44i, non-refrigerated, stackable up to 3-fold, 230 V/50/60 Hz (EU), orbit 5.1 cm (2 in)	S44I320001
Innova® S44i, refrigerated, stackable up to 3-fold, 230 V/50/60 Hz (EU), orbit 5.1 cm (2 in)	S44I330001
Innova® S44i, refrigerated, stackable up to 3-fold, 230 V/50/60 Hz (EU), orbit 5.1 cm (2 in), photosynthetic LED light bank	S44I331001
Positioning base (small), 10.16 cm (4 in), Innova® S44i	S44I041001
Positioning base (tall), 30.48 cm (12 in), Innova® S44i	S44I041002
Stacking kit, for double stack of Innova® S44i	S44I041005
Stacking kit, for Innova® S44i to Innova® 44/44R	S44I041006
Stacking kit, for triple stack Innova® S44i	S44I041003
Static incubation shelf, Innova® S44i	S44I042001
Darkening window shade, removable, Innova® S44i	S44I042002
Universal platform for Innova® S44i, 76 × 62 cm (30 × 24 in), compatible with sticky pads: 9 necessary to cover platform (sold separately, order no: M1250-9700, cutting required), anodized aluminum	S44I040001
125 mL Erlenmeyer flask dedicated platform, 86 clamps	S44I040002
250 mL Erlenmeyer flask dedicated platform, 53 clamps	S44I040003
500 mL Erlenmeyer flask dedicated platform, 39 clamps	S44I040004
2 L Lauber Thomson flask dedicated platform, 15 clamps, aluminum, for 2 L narrow neck Erlenmeyer, Thomson, or Corning flasks (DIN-ISO 1773) bottom diameter ~166 mm	S44I040010
1 L Erlenmeyer flask dedicated platform, 23 clamps	S44I040005
2 L Erlenmeyer flask dedicated platform, 15 clamps, aluminum, for 2 L wide neck Erlenmeyer flasks (DIN-ISO 24450), bottom diameter ~153 mm	S44I040006

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

New Brunswick Innova® 44/44R



Description
Are you looking for a reliable high-capacity stackable incubator shaker? The Innova 44/44R is one of our most popular shakers – its capacity for flasks up to 5 L in volume, the space-saving glide up door, multistep programming, the reliable Innova triple-eccentric drive, and the cost saving potential make it a smart choice.

Product features
- **Applicational flexibility:** Accommodates flasks up to 5 L, sticky pad platform for flat bottom vessels, orbits 25 or 51 mm (1 or 2 in), optional: photosynthetic light bank and humidity monitoring
- **Saves money and lab space:** No internal HEPA-filter that must be replaced annually for optimal performance, 2x/3x stackable in a small footprint
- **Reliable 24/7 with high loads:** Innova triple eccentric counterbalanced drive (three weight-supporting shafts; please do not confuse with “triple counterbalanced” drives that usually come with only one weight support), max. load 26 kg / 57 lb (solid weight test)

Ordering information

Description	Order no.
New Brunswick Innova® 44	
stackable up to 3-fold, 230 V ± 10 %/50 Hz (EU/CN), orbit 2.5 cm (1 in)	M1282-0002
stackable up to 3-fold, 230 V ± 10 %/50 Hz (EU/CN), orbit 5.1 cm (2 in)	M1282-0012
New Brunswick Innova® 44R	
refrigerated, stackable up to 3-fold, 230 V ± 10 %/50 Hz (EU/CN), orbit 2.5 cm (1 in)	M1282-0006
refrigerated, stackable up to 3-fold, 230 V ± 10 %/50 Hz (EU/CN), orbit 5.1 cm (2 in)	M1282-0016
Stacking kit, for stacking one additional 44 or 44R (3 × Innova® 44/44R can be placed in a single stack)	M1282-0500
Remote alarm option, for Innova® 44/44, Innova® 43/43, Innova® 42/42 or Innova® 40/40	M1320-8029
Universal platform for Innova® 44/44R, 76 × 46 cm (30 × 18 in), not interchangeable with other 76 × 46 cm platforms	M1282-9904
Aluminum platform for Innova® 44/44R, 76 × 46 cm (30 × 18 in), not interchangeable with other 76 × 46 cm platforms	
125 mL Erlenmeyer flask dedicated platform	M1282-9905
250 mL Erlenmeyer flask dedicated platform	M1282-9906
500 mL Erlenmeyer flask dedicated platform	M1282-9907
1 L Erlenmeyer flask dedicated platform	M1282-9908
2 L Erlenmeyer flask dedicated platform for Innova® 44, 76 × 46 cm (30 × 18 in), 12 clamps, aluminum, for 2 L wide neck Erlenmeyer flasks (DIN-ISO 24450), bottom diameter ~153 mm. For 2 L narrow neck Erlenmeyer, Thomson, or Corning flasks (DIN-ISO 1773) bottom diameter ~166 mm, please refer to universal platform and clamps M1190-9004	M1282-9909
Sticky pad platform for Innova® 44(R), 76 × 46 cm (30 × 18 in), 7 sticky pads necessary to cover platform (sold separately, order no: M1250-9700, cutting required), anodized aluminum	M1282-9913
Heavy duty 0.95 cm-thick aluminum plate platform for Innova® 44/44R only, 76 × 46 cm (30 × 18 in), not interchangeable with other 76 × 46 cm platforms. Heavy-duty platforms are recommended for shaking full loads of flasks, 1 L and larger, containing more than 20 % volume or with baffles.	
Heavy duty universal platform	M1282-9915
Positioning bases, increases the height of the shaker for easier access, mandatory for stacked shakers	
for Innova® 44/44R, 10.2 cm, short	M1282-0600
for Innova® 44/44R, 30.5 cm, medium	M1282-0800
for Innova® 44/44R, 40.6 cm, tall	M1282-0700
12-port gassing manifold, for Innova® 44/44R - contact Eppendorf for installation options	M1282-0291
Humidity monitor, for Innova® 44/44R - contact Eppendorf for installation options	M1282-5011
UV germicidal light, for Innova® 44R only - contact Eppendorf for installation options	M1282-9921
Photosynthetic light bank, for Innova® 44R only - contact Eppendorf for installation options	M1282-9922

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

New Brunswick Innova® 42/42R



Description
Are you looking for a highly-versatile stackable incubator shaker that comes with Innova reliability? The Innova 42/42R is one of our most popular shakers because of its cleanability, variety of options (like a static cultivation shelf, a culture drawer to protect Agar plates from evaporation, UV germicidal or photosynthetic light), and flexibility of positioning in the lab.

Product features
- > **High capacity in a small footprint:** for example, 4x 5 L or 2x 6 L flasks on universal platform; device footprint 4731 cm^2 /733 in^2 (63.5 cm/25 in width, 74.5 cm/29.3 in depth)
- > **Ergonomical and safe interface handling:** Top mounted controls and display make bending down unnecessary during handling, avoids accidental parameter changes, and can be reached easily even in a double stack
- > **Easy to clean:** Spill diverter and drainable built-in spill pan with rounded corners protect the drive from accidental spills (can be used as a water reservoir to reduce sample evaporation); airflow UV-germicidal light optional

More info about the Innova 42/42R Download Flyer

www.eppendorf.link/flyer-Innova-42-42R

Ordering information

Description	Order no.
New Brunswick Innova® 42, small stackable shaker	
stackable up to 2-fold, 230 V/50/60 Hz (CN/EU), orbit 1.9 cm (0.75 in), one height-adjustable shelf (stainless steel) included, additional shelves can be added (Order no. M1335-0080)	M1335-0002
stackable up to 2-fold, 230 V/50/60 Hz (CN/EU), orbit 2.5 cm (1 in), one height-adjustable shelf (stainless steel) included, additional shelves can be added (Order no. M1335-0080)	M1335-0012
New Brunswick Innova® 42R, small stackable shaker	
refrigerated, stackable up to 2-fold, 230 V/50/60 Hz (CN/EU), orbit 1.9 cm (0.75 in), one height-adjustable shelf (stainless steel) included, additional shelves can be added (Order no. M1335-0080)	M1335-0006
refrigerated, stackable up to 2-fold, 230 V/50/60 Hz (CN/EU), orbit 2.5 cm (1 in), one height-adjustable shelf (stainless steel) included, additional shelves can be added (Order no. M1335-0080)	M1335-0016
Stacking kit, for stacking Innova® 42/42R units	M1335-0800
Stacking kit, for stacking Innova® 4200/4230 units on top of Innova® 42/42R shakers	M1335-0810
Remote alarm option, for Innova® 44/44, Innova® 43/43, Innova® 42/42 or Innova® 40/40	M1320-8029
Additional perforated shelf and brackets, for Innova® 42/42R	
stainless steel, 19.5 x 19.5 in / 49.5 x 49.5 cm (W x D)	M1335-0080
Platforms for Innova® 2100/40/40R/42/42R, Excella® E24/E24R, 46 × 46 cm (18 × 18 in), phenolic resin (unless otherwise stated)	
Universal platform, aluminum	M1250-9902
125 mL Erlenmeyer flask dedicated platform	M1194-9904
250 mL Erlenmeyer flask dedicated platform	M1194-9905
500 mL Erlenmeyer flask dedicated platform	M1194-9906
1 L Erlenmeyer flask dedicated platform	M1194-9907
2 L Erlenmeyer flask dedicated platform, for 2 L wide neck Erlenmeyer flasks (DIN-ISO 24450), bottom diameter ~153 mm. For 2 L narrow neck Erlenmeyer, Thomson, or Corning flasks (DIN-ISO 1773) bottom diameter ~166 mm refer to universal platform and clamps M1190-9004.	M1194-9908
Sticky pad platform for Innova® 40(R)/42(R)/2100, Excella® E24(R), 46 × 46 cm (18 × 18 in), 4 sticky pads necessary to cover platform (sold separately, order no: M1250-9700), anodized aluminum	M1250-9903
Sticky pad adapter kit, 2 anodized aluminum sheets, each 15.2 × 45.7 cm (6 × 18 in)	M1250-9504
Sticky pad, 20 × 20 cm (8 × 8 in), Compatible platform or adapter kit necessary	M1250-9700
Quick-change platform kit, enables platform attachment without tools, for Innova® 2100/4000/4080/4230	M1192-9901
Culture drawer, (height adjustable) prevents plates from drying	M1335-0501
Utility carrier, holds racks and vessels between x2 rubber-cushioned cross bars, for Innova® 2100/Innova® 40 /Innova® 42/Excella® 24	M1194-9909
Rod kit, for utility carrier (one additional rod), of Innova 40/42/2100 and Excella 24 lab shakers	M1194-9923
Utility tray with non-skid rubber surface for Innova® 2100, 40, 42, usable as a stand-alone – no other platform required	M1194-9910
Drip pan, to catch accidental spills, for universal platform M1250-9902	M1250-9906
Photosynthetic light bank, programmable, Innova® 42R only - contact Eppendorf for installation options	M1335-0300
UV germicidal light, programmable, Innova® 42R only - contact Eppendorf for installation options	M1335-0400
Humidity monitor, for Innova® 42/42R - contact Eppendorf for installation options	M1335-0500
12-port gassing manifold, for Innova® 42/42R - contact Eppendorf for installation options	M1335-0600

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

New Brunswick Innova® 40/40R



Description
Do you need a compact benchtop orbital shaker that offers high visibility and quick access to flasks with a volume of up to 3 L? The Innova 40/40R is an easy-to-program orbital shaker that comes with the famous Innova triple eccentric drive to provide 24/7 reliable operation for decades.

Product features
> **Check your samples:** Large, insulated, and scratch-resistent viewing provides a clear view of the chamber contents (device stops when lid is opened); holds flasks up to 3 L
> **Built to perform and last:** Innova triple-eccentric counterbalanced drive in cast iron housing provides vibration and trouble-free operation for years
> **Tight temperature and speed control:** Temperature accuracy and uniformity: ±0.1 °C and ±0.25 °C (at 37 °C; independent over-temperature cutoff included), speed accuracy 1 rpm

More info about the Innova 40/40R Download Flyer

www.eppendorf.link/flyer-Innova-40-40R

Technical specifications subject to change.

Ordering information

Description	Order no.
New Brunswick Innova® 40	
non-stackable, 230 V/50/60 Hz (CN/EU), orbit 1.9 cm (0.75 in)	M1299-0082
non-stackable, 230 V/50/60 Hz (CN/EU), orbit 2.5 cm (1 in)	M1299-0092
New Brunswick Innova® 40R	
refrigerated, non-stackable, 230 V/50/60 Hz (CN/EU), orbit 1.9 cm (0.75 in)	M1299-0086
refrigerated, non-stackable, 230 V/50/60 Hz (CN/EU), orbit 2.5 cm (1 in)	M1299-0096
Remote alarm option, for Innova® 44/44, Innova® 43/43, Innova® 42/42 or Innova® 40/40	M1320-8029
Platforms for Innova® 2100/40/40R/42/42R, Excella® E24/E24R, 46 × 46 cm (18 × 18 in), phenolic resin (unless otherwise stated)	
Universal platform, aluminum	M1250-9902
125 mL Erlenmeyer flask dedicated platform	M1194-9904
250 mL Erlenmeyer flask dedicated platform	M1194-9905
500 mL Erlenmeyer flask dedicated platform	M1194-9906
1 L Erlenmeyer flask dedicated platform	M1194-9907
2 L Erlenmeyer flask dedicated platform, for 2 L wide neck Erlenmeyer flasks (DIN-ISO 24450), bottom diameter ~153 mm. For 2 L narrow neck Erlenmeyer, Thomson, or Corning flasks (DIN-ISO 1773) bottom diameter ~166 mm refer to universal platform and clamps M1190-9004.	M1194-9908
Sticky pad platform for Innova® 40(R)/42(R)/2100, Excella® E24(R), 46 × 46 cm (18 × 18 in), 4 sticky pads necessary to cover platform (sold separately, order no: M1250-9700), anodized aluminum	M1250-9903
Quick-change platform kit, enables platform attachment without tools, for Innova® 2100/4000/4080/4230	M1192-9901
Utility carrier, holds racks and vessels between x2 rubber-cushioned cross bars, for Innova® 2100/Innova® 40 /Innova® 42/Excella® 24	M1194-9909
Rod kit, for utility carrier (one additional rod), of Innova 40/42/2100 and Excella 24 lab shakers	M1194-9923
Utility tray with non-skid rubber surface for Innova® 2100, 40, 42, usable as a stand-alone – no other platform required	M1194-9910
Drip pan, to catch accidental spills, for universal platform M1250-9902	M1250-9906

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Shakers Accessories

Accessories	
Description	**Order no.**
Test tube rack, small, 30 × 8 × 12.9 cm	
diameter 8 – 11 mm, 48 tubes	M1289-0001
diameter 12 – 15 mm, 34 tubes	M1289-0002
diameter 15 – 18 mm, 24 tubes	M1289-0003
diameter 18 – 21 mm, 18 tubes	M1289-0004
diameter 22 – 26 mm, 13 tubes	M1289-0005
diameter 26 – 30 mm, 12 tubes	M1289-0006
Test tube rack, medium, 36 × 8 × 12.9 cm	
diameter 8 – 11 mm, 60 tubes	M1289-0010
diameter 12 – 15 mm, 44 tubes	M1289-0020
diameter 15 – 18 mm, 31 tubes	M1289-0030
diameter 18 – 21 mm, 23 tubes	M1289-0040
diameter 22 – 26 mm, 16 tubes	M1289-0050
diameter 26 – 30 mm, 16 tubes	M1289-0060
Test tube rack, large, 45 × 8 × 12.9 cm	
diameter 8 – 11 mm, 80 tubes	M1289-0100
diameter 12 – 15 mm, 60 tubes	M1289-0200
diameter 15 – 18 mm, 42 tubes	M1289-0300
diameter 18 – 21 mm, 30 tubes	M1289-0400
diameter 22 – 26 mm, 22 tubes	M1289-0500
diameter 26 – 30 mm, 20 tubes	M1289-0600
Clamp, for 1 L media bottles	ACSB-1000S
Clamp, for 500 mL media bottles and TPP Bioreactors 450 mL or 600 mL	ACSB-500S
Angled test tube rack holder, for user-supplied test tube racks and microplates	TTR-210
Angled Test Tube Rack Spacer Bar, for use with TTR-210	
to accommodate test tubes racks that are less than 13 mm (5 in) wide	TTR-215
Microplate rack, single layer, for single layer of five plates	TTR-221
Microplate rack, stack, stack three deepwell or nine standard plates	M1289-0700
Sticky tape, 23 m × 3.8 cm (75 feet × 1.5 in) roll	M1250-9600
Sticky pad, 20 × 20 cm (8 × 8 in), Compatible platform or adapter kit necessary	M1250-9700
Drip pan, to catch accidental spills, for use with universal platform M1250-9920	M1250-9921
Drip pan, to catch accidental spills, for universal platform M1250-9902	M1250-9906

8 – 11 mm: fits e.g. Eppendorf tubes 1.5 mL, 15 – 18 mm: fits e.g. 15 mL Conicals, 26 – 30 mm: fits e.g. 50 mL Conicals

Clamps - See page 16/17 for clamp capacities and order numbers

Find the right lab shaker accessory

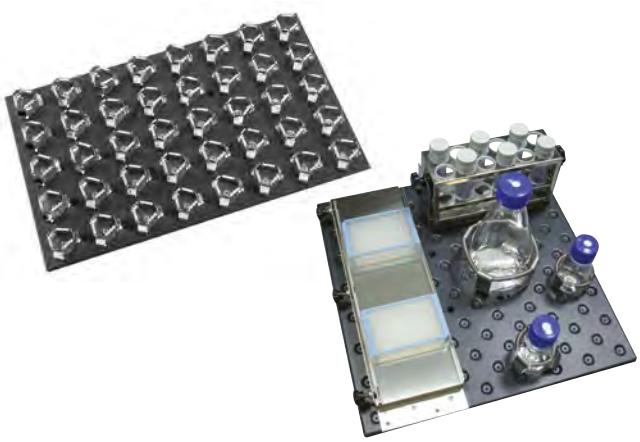
Shaker Accessory Guide

www.eppendorf.link/shaker-accessory-guide



Test tube racks


Shakers Accessories



Various platform types



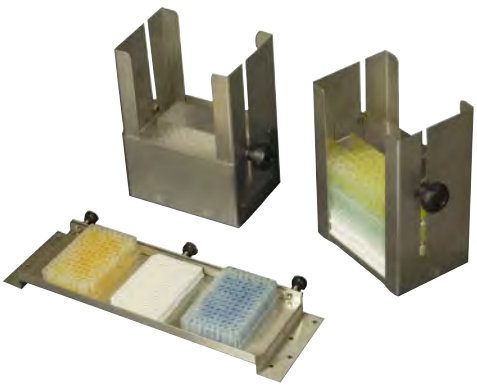Lab shaker clamps



Microplate racks



Sticky pad



Utility carrier



Utility Tray

Universal Platforms for Incubated Shakers

Universal Platforms and Clamps for Incubated Shakers

	Innova® S44i	Innova® 44/44R	Innova® 43/43R	Innova® 42/42R
Order no. universal platform	**S44I040001**	**M1282-9904**	**M1250-9920**	**M1250-9902**
	Clamps	**Clamps**	**Clamps**	**Clamps**
10 mL Erlenmeyer flasks	238	187	183	109
25 mL Erlenmeyer flasks	238	96	92	64
50 mL Erlenmeyer flasks	130	96	92	45
125 mL Erlenmeyer flasks	81	39	39	24
250 mL Erlenmeyer flasks	48	31	30	19
500 mL Erlenmeyer flasks	36	24	24	14
1 L Erlenmeyer flasks	20	14	12	8
2 L Erlenmeyer flasks*	14[1)]	11	11	6
3 L Erlenmeyer flasks	9[1)]	6	6	4
4 L Erlenmeyer flasks	8[1)]	6	6	4
5 L Erlenmeyer flasks	6[1)]	6[2)]	6[2)]	4[3)]
6 L Erlenmeyer flasks			4[2)]	2[3)]
2 L Lauber Thomson*	13	11	11	6
2.8 L Fernbach flasks	8	6	6	4
500 mL media bottle flasks	30	24	24	14
1 L media bottle flasks	20	13	13	8
Microplate rack, single layer, for single layer of five plates	4	4	4	2
Microplate rack, stack, stack three deepwell or nine standard plates	20	16	16	8
Test tube rack, small, 30 × 8 × 12.9 cm	12	9	9	5
Test tube rack, medium, 36 × 8 × 12.9 cm	10	8	8	4
Test tube rack, large, 45 × 8 × 12.9 cm	7	6	6	4
Platform size (cm/in)	76 × 62 cm (30 × 24 in)	76 × 46 cm (30 × 18 in)	76 × 46 cm (30 × 18 in)	46 × 46 cm (18 × 18 in)

* Note to 2 L clamps: ACE-2000S fits 2 L wide neck Erlenmeyer flasks (DIN-ISO 24450), max. bottom diameter ~158 mm. For 2 L narrow neck Erlenmeyer (DIN-ISO 1773), Thomson, or Corning flasks with max. bottom diameter of 166 mm refer to clamp M1190-9005 (Clamp, for 2 L Thompson flasks).

[1)] S44i: Maximum flask capacity limited to 1 L with installed shelf (removable), distance platform to ceiling ~43.7 cm, platform to shelf ~27 cm, platform to photosynthetic light bank ~40.6 cm.[2)] Innova 43/44: Maximum flask size limited to 4 L with installed photosynthetic light bank. I44: Distance platform to ceiling ~46 cm, platform to photosynthetic light bank ~40 cm. I43: Distance platform to ceiling ~48 cm. [3)] Innova 42: Maximum flask size limited to 4 L with installed drawer, shelf or photosynthetic light bank (shelf and drawer removable, shelf adjustable in height). Distance platform to ceiling: ~47.7 cm, platform to drawer ~35.3 cm, platform to shelf (in position 5 from top) ~36.8 cm.[4)] New Brunswick S41i: Max. flask size with shelf in lower position limited to 250 mL Erlenmeyer or 500 mL Thomson Optimum Growth. Max. flask size with shelf in upper position limited to 1 L Erlenmeyer or 2.8 L Thomson Optimum Growth. Max. flask size without shelves 3 L and 5 L Corning and 5 L Thomson Optimum Growth. No fit of standard 5 L Erlenmeyer flasks (nn/wn). Platform to ceiling: ~40 cm, platform to lower shelf: ~18.5 cm, platform to upper shelf ~27.5 cm [5)] CellXpert CS220 specialized clamps are available (see page 11 Cell Incubation, 180 °C resistant, metric screws M4x7). [6)] Capacity data not available at time of publication. Please contact your Eppendorf representative for more information.

Dedicated Platforms and Clamps for Incubated Shakers

	Innova® S44i		Innova® 44/44R		Innova® 43/43R	
	Clamps	**Order no.**	**Clamps**	**Order no.**	**Clamps**	**Order no.**
125 mL Erlenmeyer flasks	86	S44I040002	60	M1282-9905	60	M1191-9909
250 mL Erlenmeyer flasks	53	S44I040003	40	M1282-9906	40	M1191-9910
500 mL Erlenmeyer flasks	39	S44I040004	24	M1282-9907	24	M1191-9911
1 L Erlenmeyer flasks	23	S44I040005	15	M1282-9908	15	AG-1
2 L Erlenmeyer flasks*	15	S44I040006	12	M1282-9909	12	AG-2
2 L Lauber Thomson*	15	S44I040010				
Sticky pad platform**		Not required[1)]		M1282-9913		M1250-9904
Platform size (cm/in)	76 × 62 cm (30 × 24 in)		76 × 46 cm (30 × 18 in)		76 × 46 cm (30 × 18 in)	

* Note to 2 L clamps: For 2 L wide neck Erlenmeyer flasks (DIN-ISO 24450), max. bottom diameter ~158 mm refer to 2 L Erlenmeyer flask platforms. For 2 L narrow neck Erlenmeyer (DIN-ISO 1773), Thomson, or Corning flasks with max. bottom diameter of 166 mm refer to 2 L Lauber Thomson platforms.

** Sticky pads to be ordered separately see page 280

[1)] The universal platform of the Innova S44i, CellXpert CS220 and the New Brunswick S41 are designed to be compatible with sticky pads directly.

Lab Shaker Clamps

Innova® 40/40R	New Brunswick S41i	Clamps	Clamps	CellXpert® CS220	Clamps CS220
M1250-9902	M1334-9920			6740070012	
Clamps	Clamps	Dimensions (W × H)	Order no.	Clamps	Order no.
109	110	31 × 26 mm	ACE-10S	-	
64	60	23 × 22 mm	M1190-9004	-	
45	60	51 × 26 mm	M1190-9000	-	
24	23	68 × 37 mm	M1190-9001	60[5)]	6740070152
19	18	91 × 47 mm	M1190-9002	50[5)]	6740070160
14	15[4)]	102 × 48 mm	M1190-9003	30[5)]	6740070179
8	10[4)]	130 × 64 mm	ACE-1000S	20[5)]	6740070187
6	6[4)]	158 × 72 mm	ACE-2000S	14[5)]	6740070195
4	3[4)]	189 × 112 mm	ACE-3000S	6[5)]	6740070225
	3[4)]	210 × 99 mm	ACE-4000S	-	
	3[4)]	222 × 145 mm	ACE-5000S	6[5)]	6740070225
		244 × 100 mm	ACE-6000S	-	
6	6[4)]	165 × 112 mm	M1190-9005	[6)]	[6)]
4	3[4)]	203 × 73 mm	ACFE-2800S	[6)]	6740070209
14	15[4)]	92 × 108 mm	ACSB-500S	28	ACSB-500S
8	8[4)]	108 × 150 mm	ACSB-1000S	[6)]	ACSB-1000S
2			TTR-221	4	TTR-221
8			M1289-0700	19	M1289-0700
5	6		see page 14	15	see page 14
4	3		see page 14	11	see page 14
4	3		see page 14	10	see page 14
46 × 46 cm (18 × 18 in)	46 × 46 cm (18 × 18 in)			51.4 × 93 cm (20.2 × 36.6 in)	

Innova® 42/42R		Innova® 40/40R		New Brunswick S41i		Clamps
Clamps	Order no.	Clamps	Order no.	Clamps	Order no.	Dimensions (W × H)
34	M1194-9904	34	M1194-9904	32	M1334-9921	68 × 37 mm
25	M1194-9905	25	M1194-9905	24	M1334-9922	91 × 47 mm
16	M1194-9906	16	M1194-9906	15	M1334-9923	102 × 48 mm
9	M1194-9907	9	M1194-9907	11	M1334-9924	130 × 64 mm
5	M1194-9908	5	M1194-9908	6	M1334-9925	158 × 72 mm
						165 × 112 mm
	M1250-9903		M1250-9903		Not required[1)]	
46 × 46 cm (18 × 18 in)		46 × 46 cm (18 × 18 in)		36 × 61 cm (14 × 24 in)		

Bioprocess

»We help bring life-saving treatments to the world.«

Lina Tao, Senior Vice President, Eppendorf Bioprocess Unit

Bioprocess engineers develop and produce a multitude of products and ingredients available today. Their applications are diverse and the products can be found in the pharmaceutical, chemical, and nutritional industry. Within those branches, promising new bioprocess approaches, such as cell and gene therapies (CGT) or stem cell-derived novel food, start gaining momentum and open the door towards a new tomorrow. The progresses in the CGT field hold great potential to revolutionize how we will live in the future, but such progresses will only be possible with the help of the bioprocessing industry.
With our Eppendorf Bioprocess solutions, we are committed to help bring life-saving treatments to the world. Our bioprocess solutions are successfully used in the development of cell and gene therapies for more than a decade and with our single-use stirred-tank bioreactor technology, we are aiming to provide the new gold-standard for this growing industry. By exploiting the strong synergies in bioreactor technology and polymer manufacturing, Eppendorf bioprocess has emerged as a global player and valuable resource to its customers. With our equipment, training programs, and application services, we support scientists in resolving cultivation bottlenecks from bioprocess development to production. In that way and in line with our corporate mission, we contribute to the efforts of our customers worldwide to improve human living conditions.



From Cell and Gene Therapy to Cultured Meat
Currently, we are entering an age where not only cell products but also the cell itself is the product of interest. Cell and gene therapies can facilitate treating diseases like cancer, for example by modulated immune cells or viral vectors that adjust immune responses accordingly. Cell therapy techniques aim to treat diseases by harnessing cells to deliver treatment. Alternatively, cell therapy can be used to repair or replace damaged tissue. Gene therapy aims towards restoring abnormal or dysfunctional expression patterns of a disease-related gene by introducing genetic material to replace, enhance or silence its function. In the same line, stem cell-based technologies are promising approaches for drug discovery and therapy. Moreover, new advances within the stem cell field even revolutionize how we will cultivate meat in the future.
Our bioprocess solutions enable the controlled cultivation of induced pluripotent stem cells (iPSCs), mesenchymal stem cells (MSCs) and others to help establishing optimal and reproducible conditions for your process development. Single-use stirred-tank rigid-wall bioreactors are the key technology to overcome limitations of established 2D or bag-based cell cultivations. Our BioBLU® Single-Use Bioreactors are developed for high-density (stem) cell cultivation to overcome production bottlenecks through seamless scale-up and reproducible results.
Learn more about Eppendorf single-use bioreactors and examples for cell and gene therapy applications at:
www.eppendorf.link/cell-and-gene-therapy-development

Learn more about vaccines
www.eppendorf.link/vaccines

Learn more about antibodies
www.eppendorf.link/antibodies



From small scale to pilot/production scale, Eppendorf provides the bioprocess solution you need.

Antibodies/Hormones
Improved cultivation techniques such as perfusion and new possibilities in data handling and automation enhance the development of antibodies, therapeutic proteins, and active ingredients.
Eppendorf offers one of the most scalable and comprehensive single-use portfolios for cell culture applications on the market, for seamless process scale-up from R&D labs to pilot and manufacturing facilities.

Academic Customers
No matter which research area you are focusing on, we understand that universities and other publicly funded institutes are facing special challenges, such as frequently changing staff and often limited budgets. With flexible hardware and intuitive software tools, Eppendorf bioprocess systems support the various stages of discovery – from understanding a metabolic pathway to developing a commercially viable bioprocess. Specialists from Eppendorf will recommend equipment that meets your needs and budget.

Vaccines
Driven by events such as the COVID-19 pandemic and other governmental vaccination programs, there is a rising demand for development of new vaccines. Eppendorf bioprocess equipment helps companies in setting up flexible processes to balance costs and shorten time-to-market. Besides standard impellers, Eppendorf offers specialty impellers which can facilitate perfusion processes. For example, our packed-bed impeller uses Fibra-Cel® Disks as a solid support material for growth when secreted proteins are desired, e.g. from mammalian or insect cell culture.

Looking for expert advice on key bioprocessing topics?

www.eppendorf.link/bioprocessing-intro

Download the bioprocess family brochure
www.eppendorf.com/bioprocess-brochure

Our Portfolio – Your Choice



Model	DASbox® Mini Bioreactor System	DASGIP® Parallel Bioreactor Systems	SciVario® twin
Page	**8**	**8**	**6**
Working volume range[1]	60 – 250 mL	0.2 – 1.8 L	0.2 – 40 L
Single-use vessels available	■	■	■
Glass vessels, autoclavable	■	■	■
Interchangeable vessels	■	■	■
Bacteria/yeasts/fungi	■	■	■
Mammalian/animal cells	■	■	■
Stem cells	■	■	Optional
Insect cells	■	■	Optional
Number of parallel units	Up to 24	Up to 16	2
Controller	PC	PC	Touchscreen
BioCommand®			
DASware®	■	■	■
Gas mixing options	4 gas (air, N_2, O_2, CO_2)	4 gas (air, N_2, O_2, CO_2)	4 gas (air, N_2, O_2, CO_2)
Gas flow control[2]	TMFC	R or TMFC	TMFC
Exhaust analysis	■	■	■
Optical density measurement	■	■	■
Suitable for qualification for GMP			

[1] Realized using multiple vessel sizes [2] Gas Flow Controllers: R = Rotameter, TMFC = Thermal Mass Flow Controller

Get all information about the Eppendorf Bioprocess portfolio!
Explore the eshop and get an overview!
www.eppendorf.link/bioprocess-portfolio







BioFlo® 120	BioFlo® 320	BioFlo® 720
9	**9**	**10**
0.4 – 40 L	0.4 – 40 L	50 – 2,000 L
■	■	■
■	■	
■	■	■
■	■	
■	■	■
■	■	■
■	■	■
	Up to 8	
Touchscreen	Touchscreen	Touchscreen
■	■	■
■	■	
4 gas (air, N_2, O_2, CO_2)	4 gas (air, N_2, O_2, CO_2)	4 gas (air, N_2, O_2, CO_2)
R or TMFC	TMFC	TMFC
■	■	■
■	■	
	■	■

epServices
for premium performance

You will find detailed information on services for these products in the "Service Products" chapter.

SciVario® twin



Description
The SciVario twin is a next generation bioprocess controller that evolves together with you. In a fast-changing field like modern biotechnology, working with a system that supports your current and future needs is indispensable. With an intuitive user-interface and highly innovative hardware and software, it enables flexibility for process optimization and readiness for the digital age.

Product features
> Customizable and flexible thanks to the innovative bay-drawer concept for further extension and reconfiguration
> Integrated digital sensor technology (Mettler Toledo® ISM® and Hamilton ARC®), supporting analog sensors for pH and DO and optical DO sensors
> Optional PreSens® optical DO sensor technology for BioBLU Single-Use Bioreactors

Applications
> Research and development in cell culture and microbiology
> Lab scale fermentation of aerobic and anaerobic bacteria, yeasts as wel as filamentous fungi
> Cultivation of mammalian and human cell lines
> Medium optimization
> Clone and cell line screening, strain characterization

SciVario® twin
0.2 – 3.8 L working volume (autoclavable)
0.25 – 40 L working volume (single-use)



> Variable speed pumps for accurate liquid addition and operation in batch and fed-batch mode
> Wide range TMFC to allow for individual mixing of air, N_2, O_2, and CO_2 to headspace and/or submerged aeration



> Individual or parallel operation of two glass and/or BioBLU Single-Use Bioreactors, in any combination of bioreactor types
> Suitable for cell culture and microbial fermentation



> Compact design, 16-40 cm of benchspace needed per bioreactor
> Cable management guides for a clean and tidy setup



> Intuitive and exciting new user interface supporting efficient and intelligent process control
> Compatible with DASware® control software

SciVario twin Video

www.eppendorf.link/SciVario-twin-video

SciVario twin Brochure

www.eppendorf.link/One-for-All-brochure

DASbox® Mini Bioreactor System



DASbox® Mini Bioreactor System
60 – 250 mL working volume (autoclavable)
65 – 250 mL working volume (single-use)

www.eppendorf.link/DASbox

Product features

> 4-fold parallel system expandable to up to 24 bioreactors
> Suitable for glass and/or BioBLU Single-Use Bioreactors, that can be used in any combination
> Bioreactors can be run independently or in parallel
> Suitable for cell culture and microbial fermentation
> Compact mini bioreactor system: requires only 7 cm (3 inches) bench space per bioreactor
> Optimal tool for DoE and scale-down approaches
> Agitation control supporting overhead-driven Rushton, marine-type or pitched blade impellers
> Innovative liquid-free temperature control system needs no cooling agent supply and supports independent temperature control for each bioreactor
> Accurate monitoring and control of pH, DO, and level
> Variable speed pumps for accurate liquid addition and operation in batch, fed-batch, continuous, and cyclic perfusion mode
> Four mass flow controllers per bioreactor allow for individual mixing of air, N_2, O_2, and CO_2 to headspace and/or submerged aeration
> Novel liquid-free Peltier exhaust condenser with easy to handle slide in – slide out activation and deactivation
> DASware® control software for advanced process control
> Compatible with DASware Software Suite for interconnectivity and bioprocess information management

DASGIP® Parallel Bioreactor System



DASGIP® Parallel Bioreactor System
200 mL – 1.8 L working volume (autoclavable)
250 mL – 1.25 L working volume (single-use)

www.eppendorf.link/DASGIP-Parallel

Product features

> Parallel operation of up to 16 glass or single-use bioreactors
> DASGIP Bioblock for advanced and user-friendly temperature control
> Suitable for cell culture and microbial fermentation
> Modular design of control units allows for flexible system configurations that meet the demands of specific applications
> Control of agitation, pH, level, and DO (including customizable cascade modes) in each bioreactor
> Variable speed pumps for accurate liquid addition and operation in batch, fed-batch, continuous, and cyclic perfusion mode
> Optical absorbance measurement for online calculation of e.g. OD_{600} or cell dry weight
> TMFC individual gas mixing of air, N_2, O_2 and CO_2
> Online calculation of OTR, CTR and RQ
> DASware control software for advanced process control
> Compatible with DASware Software Suite for interconnectivity and bioprocess information management

BioFlo® 120



Product features

> Flexible software platform for universal control of both microbial and cell culture applications
> Auto Culture modes offer process control at the touch of a button
> Compatible with BioBLU® Single-Use Bioreactors for fermentation and cell culture applications
> Precise temperature control provided through interchangeable heat-blanketed or water-jacketed bioreactors
> High precision TMFC for automatic gas flow control
> Automatic gas mix for four independent sparge gas supplies
> Available analog input/output connection for direct integration of accessories (i.e. scales, variable-speed pumps, etc.)
> Integrated Mettler Toledo® ISM® platform
> Compatible with DASware Software Suite or BioCommand for bioprocess information management

BioFlo® 120
0.4 – 10.5 L working volume (autoclavable),
0.4 – 40 L working volume (single-use)

www.eppendorf.link/BioFlo-120

BioFlo® 320



Product features

> Interchangeable autoclavable and BioBLU Single-Use Bioreactors
> Integrated Mettler Toledo® ISM® platform
> Control up to eight systems from a single user interface
> Universal control for both microbial and cell culture applications
> Field-upgradable TMFC drawers for sparge and overlay gas
> Enhanced software package with new cascade and time profile features
> Built-in optical pH sensing technology for use with the BioBLU Single-Use Bioreactors
> DeltaV™ compatibility available through DeltaV Discovery and DeltaV ProPlus PAS
> Up to six integrated pumps capable of operating in variable-speed mode
> Eight independently controlled process gas supplies
> Documentation packages available to help qualify the system for use in GMP environments
> Compatible with DASware Software Suite or BioCommand for bioprocess information management

BioFlo® 320
0.6 - 10.5 L working volume (autoclavable),
0.4 - 40 L working volume (single-use)

www.eppendorf.link/BioFlo-320

Bioprocess Autosampler



Product features

> Aseptic operation without the use of a laminar flow cabinet
> Compatible with differently-sized glass and BioBLU® Single-Use Bioreactors with working volumes of 60 mL to 1.8 L
> Suitable for 1.5 mL and 10 mL sample vials, up to 648 samples can be stored
> Enables regular sampling 24/7
> Sample storage between 4 and 40 °C.
> Sanitation procedure using ethanol is similar to procedures, usually applied when sampling manually
> Low dead volume minimizes the reduction of culture volume
> Modular design that facilitates expansion of the number of bioreactors to be sampled and retrofitting of existing bioprocess systems
> Control of the Bioprocess Autosampler is integrated in DASware® control bioprocess software

Bioprocess Autosampler:
Modular autosampling solution for small and bench scale bioprocess systems

www.eppendorf.link/bp-autosampler

BioFlo® 720



Product features

> Compatible with Thermo Scientific™ HyPerforma™ 5:1 bioreactors from 50 L to 2,000 L
> High performance Mass Flow Controllers capable of up to 500:1 turn-down allowing multiple bioreactor sizes to be run from the same controller
> Suitable for analog and digital sensors Mettler-Toledo® ISM® and Hamilton® ARC®
> Available with dual sparge, overlay and CO_2 stripping options
> Field-upgradeable options for future expansion of the system
> Documentation packages available to help qualifying the system for use in GMP environments[1)]
> Intuitive software tools such as Auto Calibrate and Auto Inflate reduce preparation time, maximizing system efficiency
> Integrated Scale Up Assist software simplifies the workflow and calculations necessary to scale up and scale down
> Flexible choices for single-use bioreactors (SUBs) and Bioprocess Containers (BPCs)
> Mobile enclosure with a small footprint (0.7 m^2/7.55 sq ft) fitting through a standard lab door
> Watson-Marlow® peristaltic pumps for flow rates in a range of 1.2 mL/min - 3.3 L/min

[1)] BioFlo 720 is not a medical device as defined by the Food and Drug Administration or other regulatory authorities.

BioFlo® 720
Pilot- and Large-scale Single-Use bioreactor
50 – 2,000 L Working Volume

www.eppendorf.link/BioFlo-720

Eppendorf Bioprocess Software – Much More Than Just Bioprocess Control

Eppendorf offers BioCommand as well as DASware control Supervisory Control and Data Acquisition (SCADA) software packages for advanced bioprocess control. The comprehensive DASware Software Suite provides next-generation bioprocess management.

DASware Software Suite
Next-generation bioprocess management:
A suite of smart and flexible software solutions to accelerate bioprocess development, with DASware control for parallel bioprocess control. The DASware licences enable interconnectivity of bioreactors and bioreactor controllers with external lab-devices, Design of Experiments (DoE), and integration into process control systems.




DASware control
> Advanced process monitoring, control, and data logging - for parallel cultivation with individual control of each bioreactor




DASware connect
> Integration into process control systems and legacy corporate historians facilitating company-wide access to all relevant bioprocess data



DASware design
> Applies the Design of Experiments (DoE) concept via a full factorial DoE builder or by importing DoE designs from third-party DoE tools



DASware analyze
> Seamless integration of external lab devices to the bioreactor allows for process automation and feedback control loops



BioCommand software
> Enables monitoring, controlling, and logging data from your fermentation and cell culture processes. Three distinct packages provide the tools needed for research, optimization, and if needed, the security and audit trails to support your regulatory requirements.

BioBLU® Single-Use Bioreactors



Description
With renowned polymer expertise, Eppendorf is proud to offer the largest portfolio of rigid walled stirred-tank single-use bioreactors – for use in small and bench scale processes that are operated by parallel DASbox Mini Bioreactor System, DASGIP Parallel Bioreactor Systems, SciVario twin or BioFlo bench-scale systems.

BioBLU Single-Use Bioreactors combine the benefits of single-use bioreactor technology with the reliable performance of conventional glass or stainless-steel bioreactors.

Applications
> The BioBLU c bioreactors are rigid-wall, stirred-tank, single-use bioreactors, specifically designed and optimized for cultivation of mammalian cells.
> The BioBLU 5p bioreactor is a packed-bed bioreactor perfectly suited for adherent cells and perfusion culture. Pre-loaded with Fibra-Cel® disks, it provides a solid support growth matrix, e.g. for production of secreted proteins.
> The BioBLU 0.3sc bioreactor is optimized for gentle stirring and cell aggregate formation to suit the special needs of stem cells.
> The BioBLU f bioreactors for microbial applications were developed as true replacements for existing fermentation bioreactors. Utilizing an industrial standard, rigid-wall design, BioBLU f Single-Use Bioreactors allow microbial process development at the highest level.

Compared to Existing Glass Bioreactors, BioBLU Single-Use Bioreactors Have Many benefits:

> Reduced costs for cleaning and sterilization qualification
> Reduced capital investment, use your existing equipment
> β-irradiated and autoclavable bioreactor options available
> Increased productivity with reduced turnaround time between runs
> Simplified handling reduces cross contamination
> Reliable scalability through industrial design
> Simplify installation with rigid-wall design, reduced potential for bioreactor damage
> Single layer polymer design mitigates issues related to leachables and extractables
> Reduce the amount of lost runs due to sensor failure with non-invasive sensor options
> BioBLU bioreactors are compatible with a variety of Eppendorf benchtop bioprocess systems



BioBLU c Single-Use Bioreactors for cell culture applications
Single-use solutions for small and bench scale cell culture applications. A full portfolio of bioreactors covering working volumes of 100 mL – 40 L, offer unmatched scalability. The single-layer polymer design mitigates issues related to leachables and extractables.



BioBLU 5p Single-Use Bioreactor with packed-bed
For the cultivation of adherent cells and for perfusion processes we offer the BioBLU 5p packed-bed bioreactor. It utilizes the proprietary Eppendorf packed-bed impeller design and is pre-loaded with Fibra-Cel® Disks. Providing a shear-free environment, it is a premium choice for a wide variety of applications, including the production of secreted products and stem cell culture.



BioBLU f Single-Use Bioreactors for microbial applications
Single-use solutions for small and bench scale fermentation applications, covering a working volume range of 65 mL – 3.75 L. Fermentation processes have high mass transfer and heat removal requirements. Proven stirred-tank design, powerful overhead drives featuring Rushton-type impellers, and effective cooling enable the BioBLU f Bioreactors to achieve these demands.

Want to know more about BioBLU Single-Use Bioreactors?
Follow the links to the cell culture or microbiology bioreactors below to access our application notes, publications, and brochures.

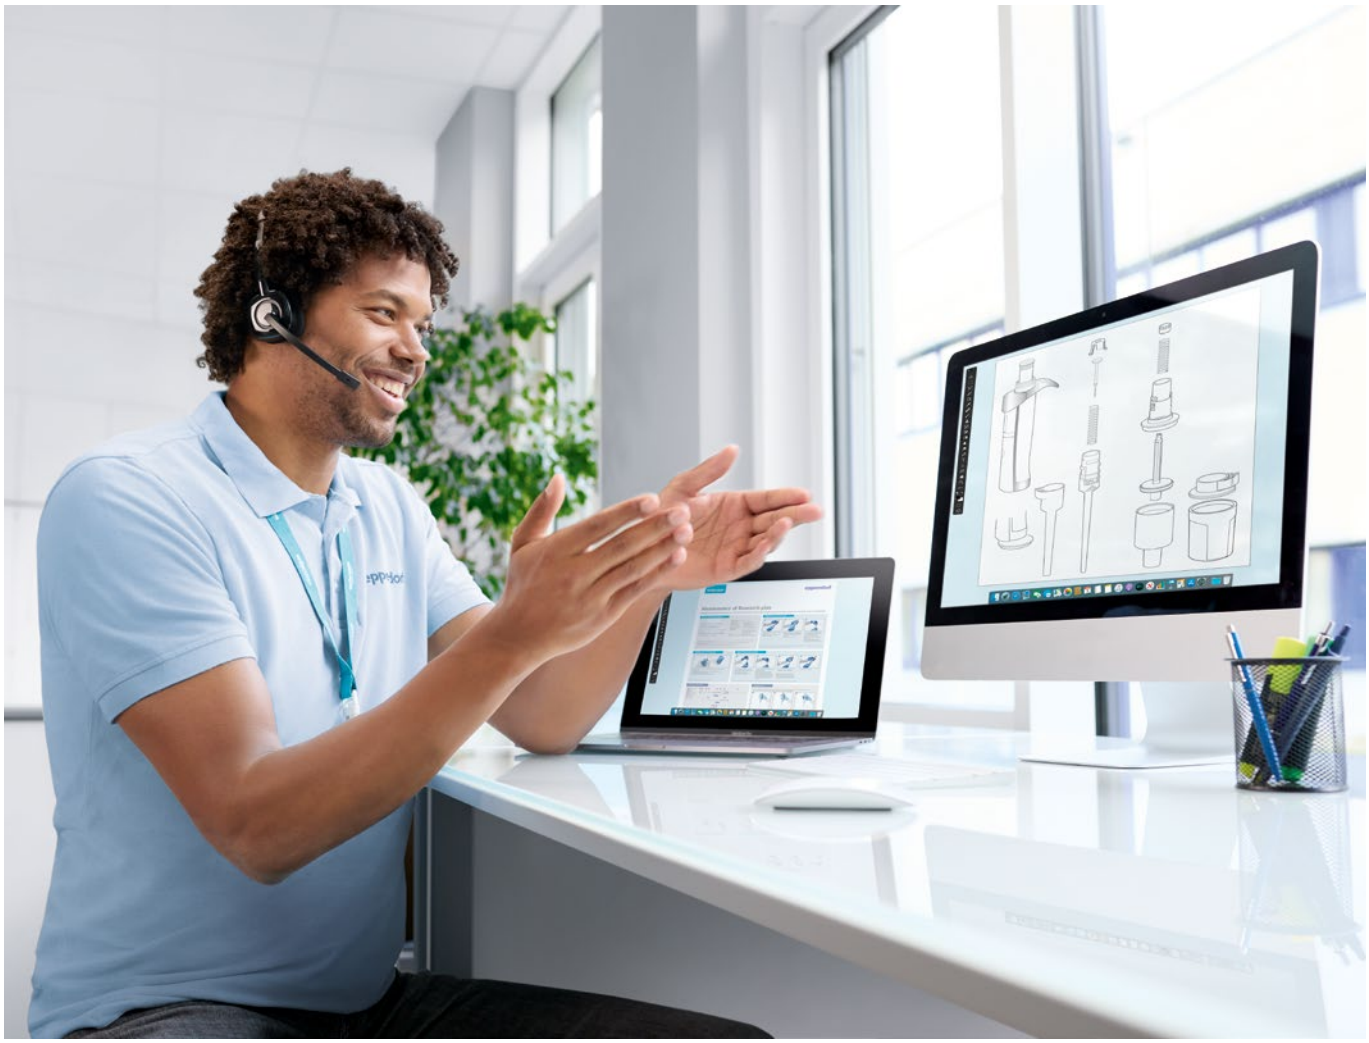
Learn more about BioBLU c Single-Use Bioreactors

www.eppendorf.link/BioBLU-c

Learn more about BioBLU f Single-Use Bioreactors

www.eppendorf.link/BioBLU-f

Service Products



Supporting You for over 80 Years

Eppendorf Services
Eppendorf began in 1945 as a medical instrument repair workshop on the grounds of the University Hospital Eppendorf in Hamburg, Germany. Today, more than 500 certified service specialists across the world provide in-house or on-site service solutions, ensuring the uptime you need and can rely on, increasing your peace of mind in terms of supporting you to comply to regulatory requirements, and the quality and safety of your results.

Application and Training Services
Keep pace with new trends, methods and technologies by receiving training and application support from our global team of scientific product and application specialists. Acquire basic knowledge, or develop more advanced skills needed for your workflows and routine maintenance within scientific research, healthcare and industry.

Our dedicated Applications and Technical Service teams are here to support you!

Get all information about the Eppendorf Service portfolio!
www.eppendorf.link/Services

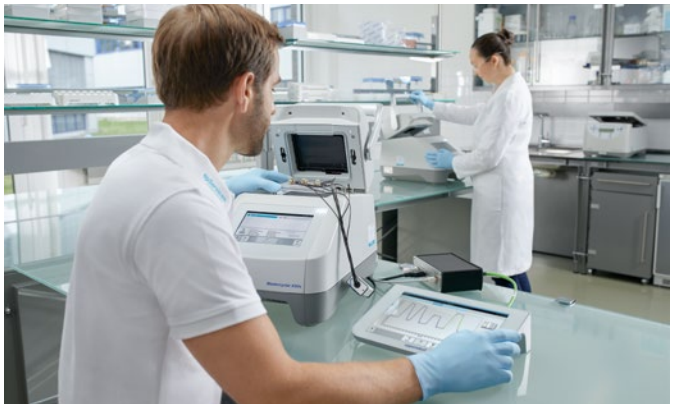
Your Needs – Our Solutions

From service agreements to on-demand services – You choose the best solution for your uptime requirements and budget, while meeting national and international compliance with corresponding norms and regulations.


We take care of your equipment throughout their full lifecycle, while you can fully concentrate on achieving the reliable results you are looking for with your research and routine lab work.



Pipette Service Done Right
Since we released the first piston stroke pipette in 1961, we continue to manufacture and service pipettes with a passion for improving user results. Our highly qualified technicians undergo intensive training and must pass rigorous exams to become certified before servicing pipettes. We maintain over 5,000 pipette manufacturer specifications and conform to the manufacturer standard when their specifications are tighter than ISO 8655 standards, if requested. In our major markets, ISO/IEC 17025-accredited calibration processes are available. As your liquid handling expert partner, we can help you meet your regulatory needs.



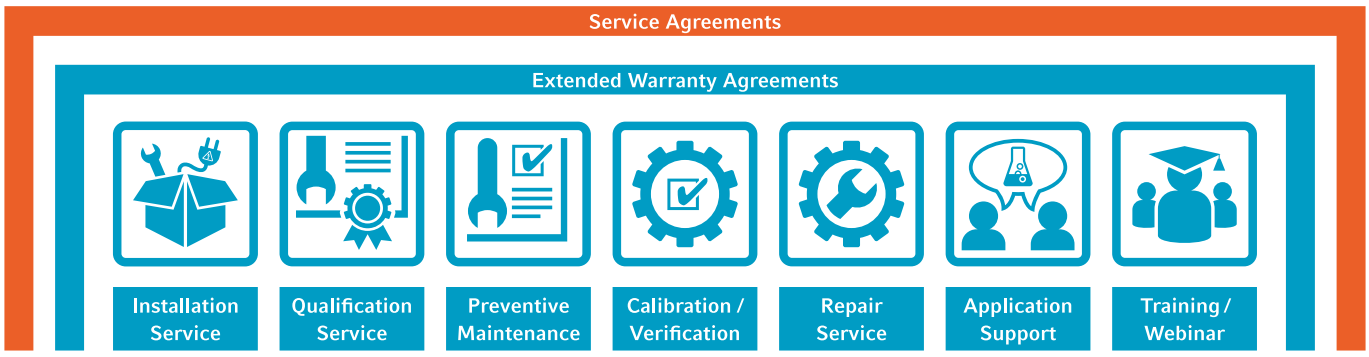Your Instruments – Our Services
How much effort does it cost you to take good care of your lab instruments to ensure valuable uptime, and prove that they are delivering reproducible results? For your peace of mind, we offer a comprehensive service portfolio, so you can be assured of reliable and optimal working equipment. Trust in Eppendorf as your service partner.



Knowledge Base
Various Application Notes, Short Protocols, FAQs, and videos are available on our website.

Exceeding your expectations
Download instrument brochure here!
www.eppendorf.link/Services-instrument

Pipette service done right
Download pipette brochure here!
www.eppendorf.link/Services-pipette

Simplify Your Service Processes

We accompany you every step of the way – from the installation and maintenance of your lab instrument or software to the support for your quality and regulatory audits.

Choose from the following service options:
> Service agreements from cost-efficient to all-inclusive care packages for an easy service process
> On-demand service solutions for individual service needs
> Do you have to spend your service budget now, but you need our services only at a later point in time? Please contact your local service organization for information on our prepaid solutions: www.eppendorf.link/service-support-form

Our Service Agreements – Your Advantages
> With our basket of Service Agreement solutions, we take the load off your shoulders by simplifying your ordering and budgeting process:
> Assuring continuous productivity
> Maintenance for a long service life
> Including repair costs: fully or partially
> Discounting on additional services
> Discounting with flexible prepaid services

Service Portal
> In our web-based Service Portal you can easily and quickly register your pipettes, define required calibration intervals and book the pipette services you need from our extensive portfolio. www.eppendorf.link/Service-tutorial

Keeping track of all of your calibration needs:
> Free cloud-based backup of your pipette inventory service data
> Define calibration intervals with reminders for upcoming services
> Convenient, fast, and intuitive online booking of pipette services
> Direct access to your service orders and documents
> Overview of the status and history of your services www.eppendorf.link/service-portal

Info: Please contact your local Eppendorf service organization for further information.



Eppendorf Service Agreements for Instruments



	AdvancedCare	PremiumCare
Service Agreement	For assured instrument reliability and uptime	For assured instrument reliability, uptime and financial plannability
Full preventive maintenance	1/year	1/year
Software update (during annual maintenance, if applicable)	■	■
Priority support[1)]	■	■
Parts, labor, travel on repairs	20 % discount	included
Discount on additional services (e.g. IQ/OQ)	10 %	10 %

[1)] Subject to local business conditions, and based on a "best effort" practise. For more information please contact your local service organization.



Extended Warranty Agreements for Instruments

For your peace of mind, we offer Extended Warranty agreements covering all repair costs and optional maintenance after the standard warranty period.

Service Agreement	**Extended Warranty** Purchased one time within the standard warranty period. Valid for one year following the standard warranty period.	**Extended Warranty plus** Purchased within the standard warranty period. Valid following the standard warranty period.
Full preventive maintenance	–	1/year
Software update (during annual maintenance, if applicable)	–	■
Priority support[1)]	■	■
Parts, labor, travel included on repairs	■	■
Discount on additional services (e.g. IQ/OQ)	–	10 %

[1)] Subject to local business conditions, and based on a "best effort" practise. For more information please contact your local service organization.



Eppendorf Service Agreements for Pipettes

Service Agreements	**PremiumCare Smart** Budget-based Agreement for fixed service budgets	**PremiumCare Protect** Service Quantitybased Agreement for assured service prices
Financial features for enhanced budget planning		
Set budget for a range of pipette services	■	
Set quantity of specific pipette services		■
Prices are based on the valid list price	■	
Prices are fixed at the start of the service agreement period		■
Flexible payment option such as pre-payment, monthly, quarterly	■	■
Spare parts included	■	■
Repair/labor costs covered up (optional)	(■)	(■)
Expedited shipping with local provider costs included	■	■
Service features for assured reliability and maximized uptime		
Preventive maintenance	■	■
Calibration in accordance with ISO 8655:2022	■	■
Accredited calibration per ISO/IEC 17025	■	■



Installation Service

The installation of your Eppendorf instrument and software will be performed by our certified service technicians. They will support you with the correct instrument settings in your environment, and will provide the initial operational instructions.



Qualification Services

Installation Qualification and Operational Qualification Services supporting GxP compliance
Are you working in a regulated environment? We offer specifically created and revised Installation Qualification and Operational Qualification services including GxP supporting documentation. These documents support you in fulfilling the complex GxP standards, reducing your administrative workload, and provide you with qualified assurance that your instrument is installed and is operating in accordance with manufacturers' specifications.

Be prepared for your internal and external audits with our GxP supporting documentation!

Installation Qualification & Operational Qualification Services	IQ/OQ GxP	OQ GxP
Check of delivery status, and installation environment	■	
Initial configuration, functional[1)] and safety checks	■	
Detailed IQ report	■	
Test of notification and alert functions	■	■
Verification of instrument parameters[1)] (e.g. temperature, speed)	■	■
Detailed OQ report	■	■
Handling of deviation list	■	■
Signed approval by customer and service technician	■	■

[1)]according to manufacturer specifications

Maintenance Services

Preventive Maintenance Services
How much do you rely on keeping your instrument in good working order? Our professional maintenance services are aimed at the prevention of unexpected downtimes and failures by early detection of problems.
Keeping your instrument in perfect working order will not only extend their service life but also increase your productivity.

Services include:
> Cleaning (external and internal)
> Maintenance
> Exchange of wear and tear parts
> Comprehensive functional check
> Software updates
> Evaluation of stored data
> Documentation

Dated service sticker to confirm Eppendorf Service

Ensure reliability and save your resources!

Calibration Services

Calibration and Verification Services
Assuring the precision and accuracy of your instrument is maintained according to specifications is your first step to reliable results.

Eppendorf offers calibration, verification and adjustment services for:
> Pipettes and Dispensers (volume)
> epMotion® dispensing tools, epMotion® 96, epMotion® 96 Flex dispensing head (volume)
> epMotion® 5073/5075 (temperature, speed)
> Centrifuges (time, speed, temperature)
> Thermocycler (temperature)
> Biological Shaker (speed, temperature)
> CO_2 Incubator (temperature, $C0_2$, O_2, rH)
> ULT Freezer (temperature)
> Photometry (wavelength, temperature i.a.)
> Temperature control- & Mixing instruments (i.a. temperature)

Repair Service

For the most productive long life and highest uptime of your Eppendorf instrument, we can provide complete and thorough technical support. Our qualified service staff ensures timely and accurate resolutions and provides professional guidance and care in our major markets. For any technical support please contact your local service organization.

Application Support

You can expect the highest standards of support for your products and applications from Eppendorf. Our highly trained scientific support staff is available in all time zones to assist you with any questions concerning our products.

Training Webinar

The Eppendorf Training Center has been providing high-quality webinars and training courses since 1997 at various locations and in several languages. Contents are constantly being updated to always include the latest insights into the scientific fields. We work with small groups to ensure optimal attention and sufficient hands-on time for our participants.



Download your decontamination form to return goods:

www.eppendorf.link/decontamination

Your local distributor: www.eppendorf.link/contact
Eppendorf SE · Barkhausenweg 1 · 22339 Hamburg · Germany · eppendorf@eppendorf.com · www.eppendorf.com · www.eppendorf.link/eshop

Pipette Calibration Service



Pipette Calibration Services Ordering Information

Service	Calibration measurements "As Found"	Calibration measurements "As Left"	Decontamination from the outside[1)]	Checking, cleaning, lubricating[2)] before calibration
ISO 8655 without Preventive Maintenance	10 per test volume		included	
ISO 8655 including Preventive Maintenance		10 per test volume	included	included
3x4 without Preventive Maintenance	4 per test volume		included	
3x4 including Preventive Maintenance		4 per test volume	included	included

[1)] Pipettes and dispensers and package equipment need to be decontaminated before sending in. Download decontamination form at www.eppendorf.com/decontamination. [2)] Internal parts

Pipette Calibration Service Packages Ordering Information

Service	Calibration measurements "As Found"	Calibration measurements "As Left"	Outside decontamination[2)], checking, cleaning, lubrication[4)]	ISO 17025 Accreditation calibration certificate
ISO 8655 Verified	4 per test volume[1)]	10 per test volume[1)]	included	
ISO 17025 including Preventive Maintenance		10 per test volume[1)]	included	included
ISO 17025 Advanced	4 per test volume[1)]	10 per test volume[1)]	included	included[3)]
ISO 17025 Professional	10 per test volume[1)]	10 per test volume[1)]	included	included

[1)] 10%, 50% and 100% of nominal volumes for variable volume instruments. [2)] Pipettes and dispensers and package equipment need to be decontaminated before sending in. Download decontamination form at www.eppendorf.com/decontamination. [3)] ISO 17025 accreditation calibration certificate is included in the second calibration after the maintenance. [4)] Internal parts

Pipette Service Agreements

Pipette Service Agreements	Order no.
PremiumCare Smart **Choose our budget based PremiumCare Smart, where you can allocate your remaining funds for any service your equipment requires, maximizing your investment until the budget is fully utilized.**	0082000066
PremiumCare Protect **Alternatively, opt for our PremiumCare Protect to keep your equipment fleet in top shape with a set number of pipette services – send in any pipette model until your service quota is fulfilled.**	0082000065

Advantages:
> Comprehensive Savings
> Hassle-free repairs (optional)
> Easy budget and consumption tracking
> Simplified coverage
> Advancing sustainability goals by:
  > paperless service ordering and digital documentation of service data
  > reducing shipping: include other brands pipettes for service by Eppendorf
> Maintenance, repair and calibration by the manufactory

For more information on Service Agreements options for multiple pipettes contact your local service organization or go to www.eppendorf.link/pipette-service

Preventive Maintenance, Calibration and Adjustment Services
Pipettes are precision instruments with parts subject to normal wear and tear leading to imprecision over time. Therefore, regular maintenance and calibration are fundamental to their precision and accuracy. Calibration services performed by highly trained and certified Eppendorf Calibration Service Technicians build the foundation of your reliable and reproducible results with your downstream applications.

Our clearly designed calibration service portfolio includes a thorough check of the pipette internally and externally, ensuring that wearable parts like O-rings are replaced in a timely manner.

We offer a range of transparent and modular service options

> We maintain every pipette's conformity according to ISO 8655:2022 (if available in your country)
> ISO/IEC 17025 accredited certification

Single Channel Pipette	8-Channel Pipette	12-Channel Pipette	16-Channel Pipette	24-Channel Pipette	Bottle Top/Dispenser
0082000140	0082000161	0082000162	0082000181	0082000182	0082000408
0082000142	0082000165	0082000166	0082000185	0082000186	0082000409
0082000139	0082000159	0082000160	0082000179	0082000180	0082000406
0082000141	0082000163	0082000164	0082000183	0082000184	0082000407

Single Channel Pipette	8-Channel Pipette	12-Channel Pipette	16-Channel Pipette	24-Channel Pipette	Bottle Top/Dispenser
0082000234	0082000235	0082000236	0082000237	0082000238	n/a
0082000143	0082000167	0082000168	0082000187	0082000188	0082000410
0082000227	0082000228	0082000229	0082000230	0082000231	n/a
0082000220	0082000221	0082000222	0082000223	0082000224	n/a

Service Products

ISO 8655
ISO 8655 lays out the standard criteria by which a pipette should be calibrated and what error limits should be used at each volume. ISO 8655 criteria include measurements at 3 volumes, 10 measurements at each volume, and controls for room environment.

Manufacturer Standard
In addition to ISO 8655 specifications, many manufacturers make pipettes that work within a tighter set of error limits than required by ISO 8655. It is important to calibrate using manufacturer error limits to ensure the pipette works according to manufacturer specifications.

ISO/IEC 17025
The ISO/IEC 17025 accreditation ensures a high level of competence and compliance with strict quality rules. ISO/IEC 17025 criteria include a traceability chain for measurement equipment, measurement uncertainty values, and approved quality standards.

We ensure our stringent and validated procedures are followed to the highest standards possible, for Eppendorf and other brand pipettes.

Description of Additional Services	Order no.
Labor Charge, 15 min. of repair services, time unit of one technician	0082000210
ISO 17025 Calibration Certificate[2)]	0082000211
Advanced Documentation, Excel file for calibration information on all pipettes/dispensers per order[1)2)]	0082000212
ISO 17025 calibration for bottle top dispenser/burets with Preventive Maintenance	0082000410
ISO 17025 calibration for bottle top dispenser/burets without Preventive Maintenance	0082000411

[1)] ISO 17025 accreditation calibration certificate is included in the second calibration after the maintenance. [2)] This service may be available in your country. Please contact your local Eppendorf service organization.

Pipette Service Overview

Pipette Service Options	3 x 4	3 x 10	3 x 10 ISO/IEC 17025 Accredited
For 1/8/12/16/24 channels and bottle top/burets	Routine test acc. to ISO 8655:2022-7	Compliant to ISO 8655:2022-6	Compliant to ISO 8655:2022-6 and ISO/IEC 17025
Readings “As found”	At 10 %, 50 % and 100 % volume	At 10 %, 50 % and 100 % volume	At 10 %, 50 % and 100 % volume
Preventive maintenance incl. seal and O-ring replacement if necessary	■	■	■
Readings “As left”	At 10 %, 50 % and 100 % volume	At 10 %, 50 % and 100 % volume	At 10 %, 50 % and 100 % volume
Also available in bundles	■	■	■
Test Report in acc. with ISO 8655-7:2022	■		
Test Report in acc. with ISO 8655-6:2022		■	
ISO 17025 Calibration Certificate in acc. with ISO 8655-6:2022 with expanded measurement uncertainties and raw data			■

Take a break, watch this video!

www.eppendorf.link/pipette-video

epMotion® 96 Service



epMotion 96 Service
The Eppendorf epMotion 96 is a semi-automated electronic pipette system for fast and precise parallel 96-channel microplate processing. The reliability of the electronic parallel pipetting system movement is the prerequisite for high precision and reproducibility of the results across the whole 96- or 384-well plate. Maintaining and verifying your system´s accuracy and precision on a regular basis is highly recommended to make sure your system still dispenses according to the specification.

Preventive Maintenance services for epMotion® 96 Flex include:
> Checking of location
> Cleaning of device
> Checking of safety mechanisms and device functionality acc. to manufacturer´s specifications
> Checking and exchanging of 96 O-rings on tip cones
> Checking and exchanging of constant force spring, spring washers, and TIPS handle springs (every 2 years)
> Software/firmware update if applicable
> Leak test with 50 µl/300 µl or 300 µl/1000 µl tips
> Maintenance report
> Dated service sticker to confirm Eppendorf service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (e.g. volume)
> Detailed IQ/OQ report
> Handling of deviation list/management
> Signed approval by customer and service technician

[1)]according to manufacturer specifications

Preventive Maintenance services for epMotion® 96 include:
> Cleaning and lubrication of dispensing block
> Checking and exchanging of 96 O-rings from cones
> Software/firmware update if applicable
> Leak Test with 50 µL + 300 µL tips
> Gravimetric calibration test of 6 volumes, 5 measurements per volume in ‚as left' condition
> Photometric test with 2 volumes, 5 measurements per volume in ‚as left' condition
> Maintenance report
> Dated service sticker to confirm Eppendorf Service
> Calibration test report according to ISO 23783-2:2022

Calibration services for epMotion® 96 Flex dispensing head
> Decontamination from the outside
> Cleaning and lubrication of dispensing head
> Checking and exchanging of 96 O-rings on tip cones
> Leak test with 50 µl + 300 µl, or 300 µl + 1000 µl tips
> Gravimetric calibration test of 6 volumes, 5 measurements per volume in "as left" condition
> Photometric test of 2 volumes, 5 measurements per volume in 'as left' condition
> Issuing of a calibration certificate in compliance with ISO/IEC 17025/ISO 23783 regulations, or a calibration test report acc. ISO 23783 for non-accredited services, and a calibration label

epMotion® Service



epMotion Service
epMotion and its dispensing tools are precision instruments. As such, they should be regularly maintained and calibrated to ensure continuing high accuracy, precision and reproducibility.

Preventive Maintenance services include:
> Cleaning (external and internal)
> Maintenance, instrument calibration and software update
> Exchange of CAN-bus cables/O-rings of dispensing tools
> Comprehensive functional check
> Evaluation of stored data
> Service check list
> Dated service sticker to confirm Eppendorf Service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (e.g. temperature, vacuum, speed, volume)
> Detailed IQ/OQ report
> Handling of deviation list/management
> Signed approval by customer and service technician

[1)]according to manufacturer specifications

Calibration services for dispensing tools
How do you know that your experimental data are correct?
Your first step to reliable results is to ensure your dispensing tools are calibrated, assuring the:

> Accuracy and precision of the dispensing tool
> Reproducibility of the dispensed volumes
> Optimization of sample yields

Calibration services for epMotion® dispensing tools include:
> Decontamination from the outside
> Cleaning of dispensing tool (internal and external)
> Exchanging of O-rings on tip cones and worn-out parts, if required
> Gravimetric calibration test of 3 volumes, 10 measurements per volume in “as found” and/or “as left” condition
> Issuing of a calibration certificate incl. measurement uncertainty according to ISO/IEC 17025 for accredited services and ISO 23783-2:2022 regulations, subject to availabilty in your region
> Issuing of a calibration test report according to ISO 23783-2:2022 for non-accredited services
> Issuing of a calibration labe

Keep your process in motion with regular maintenance and calibration services!

epMotion® Application Implementation



Automated Pipetting – Difficult Application?
Are you having trouble with a protocol or are not sure how to optimize your automated application? We are happy to advise and assist you with your application. Eppendorf offers various application support services for epMotion users with low to high throughput experiments. Our network of highly skilled and extensively trained In-Field Automation Specialists is available for comprehensive application training and support after installation of your epMotion as well as during the setup of your own advanced methods.

Application Implementation
Eppendorf will provide the on-site support to program your epMotion methods for a single application as well as optimize all liquid classes needed for the application to the best of the instrument's capability. An initial in-house feasibility test is performed. Upon completion of the method on the customer's epMotion, the application will be approved by the user. Optimization to the maximum level of performance!

For your next level of performance!

Your advantages
> Well trained Application Specialist will get you started with your methods in less time than without professional help
> Approved reliability of your programmed method
> Shortening your protocol setup times and reducing your personnel costs
> Reducing waste of valuable samples
> Improving productivity with optimized utilization of the deck capacities and the operation of the system

All systems go - At all times
Download epMotion brochure here!

www.eppendorf.link/Services-epMotion

Your local distributor: www.eppendorf.link/contact
Eppendorf SE · Barkhausenweg 1 · 22339 Hamburg · Germany · eppendorf@eppendorf.com · www.eppendorf.com · www.eppendorf.link/eshop

Centrifuge Service



Centrifuge Service
Regular service of centrifuges and rotors in either an operational or a disassembled state ensures a safe working environment. Functional inspections assure that all manufacturer specifications are met.

Preventive Maintenance services include:
> Cleaning of external and internal parts
> Checking of
  > stability, housing, lid latch, display and keypad
  > temperature sensors and speed sensor
  > rotor and imbalance detection
> Software update, if required
> System test run
> Evaluation of stored data
> Maintenance report
> Dated service sticker to confirm Eppendorf Service

Relax while your samples are spinning safely!

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (temperature, speed)
> Detailed IQ/OQ report
> Handling of deviation list/management
> Signed approval by customer and service technician

[1)]according to manufacturer specifications

Rotor Assurance Plans
Rotors and buckets are subject to normal wear and tear during regular operation. Microscopic cracks can be detected early during a qualified inspection, which will allow the rotor to be exchanged before serious damage has occurred. If none or very few surface changes are identified, the rotor can be used according to instructions.

Take a break,
watch this video!

www.eppendorf.link/centrifuge-video

Ultra- and High-Speed Centrifuge Service



Ultra- and High-Speed Centrifuge Service
Your centrifuge from our Himac centrifuge product line is now supported by Eppendorf. Our qualified staff ensures timely and accurate solutions are provided with professional guidance and care. Maintain and qualify your laboratory instruments on a regular basis with our service agreement options and on-demand services for many years of productive and reliable operation.

Preventive Maintenance services include:
> Cleaning of external and internal parts
> Checking of
  > stability, housing, lid latch, display and keypad
  > temperature sensors and speed sensor
  > rotor and imbalance detection
> Software update, if required
> System test run
> Maintenance report
> Dated service sticker to confirm Eppendorf Service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (temperature, speed)
> Detailed IQ/OQ report
> Handling of deviation list/management
> Signed approval by customer and service technician

[1)]according to manufacturer specifications

Save time by ensuring uptime and reproducible results!

Find our service flyer

www.eppendorf.link/service-ultra-centrifuge

Your local distributor: www.eppendorf.link/contact
Eppendorf SE · Barkhausenweg 1 · 22339 Hamburg · Germany · eppendorf@eppendorf.com · www.eppendorf.com · www.eppendorf.link/eshop

Mastercycler® Service



Mastercycler Service
Your cycler should be regularly maintained, and followed by a temperature verification. The exact adherence to defined temperatures is crucial for reproducible results.

Preventive Maintenance services include:
> Cleaning of external and internal parts
> Checking of
  > housing, accessories and internal parts
  > electrical connection (incl. mains power)
  > LED, display and keyboard, touchscreen
  > USB-interface
  > thermoblock
  > heated lid
  > fan(s)
> Software update if required
> Verification of temperature
> Evaluation of stored data
> Maintenance report
> Dated service sticker to confirm Eppendorf Service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameter[1)] (e.g. temperature)
> Detailed IQ/OQ report
> Handling of deviation list/management
> Signed approval by customer and service technician

[1)]according to manufacturer specifications

Keep operating – with absolute confidence

Temperature verification services
Temperature verification of selected well positions and adjustment of the cycler block temperature if necessary is highly recommended to assure instrument consistency and accuracy. The temperature verification from Eppendorf is a very accurate and precise method, meeting documentation and detection requirements in the lab.

Future-proof with Eppendorf Services

www.eppendorf.link/Mastercycler-Service-video

Temperature Control and Mixing Service



Temperature Control and Mixing Service
Slight deviations in temperature and mixing frequency of your samples can affect their reaction conditions leading to non-reproducible results. To guarantee you the precise function of the instrument we offer manufacturer-designed maintenance and qualification services.

Preventive Maintenance services include:
> Cleaning of housing, accessories, internal parts
> Checking of
  > housing, plate holder, accessories, internal parts
  > electrical connection
  > Function checking of
  > LED, display and keyboard
  > vortex sensor
  > overload protection
  > detection of ThermoTop, SmartBlock, thermoblock
  > mixing, heating, cooling, vortexing
  > fans
> Evaluation of stored data
> Maintenance report
> Dated service sticker to confirm Eppendorf Service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (e.g. heating, cooling, mixing, vortexing, timer)
> Detailed IQ/OQ report
> Handling of deviation list/management
> Signed approval by customer and service technician

[1)]according to manufacturer specifications

Temperature Verification
Temperature verification of selected well positions is highly recommended to assure instrument consistency and accuracy.

Care for your samples with our mix of services!

ULT Freezer Service



ULT Freezer Service
Reliable and efficient performance can be expected for years of smooth operation from any of our ULT Freezers. Our services are designed to check, validate, and promote reliable freezer performance according to specifications.

Preventive Maintenance services include:
> Cleaning and inspection of air filter, heated vent/condenser
> Checking of
  > environment, electrical supply and fittings
  > CO_2 /LN_2 backup system
  > independent temperature monitoring system
  > compressor operating temperature
  > condition and function of inner door/lids, cooling fan
  > motor, bearings, blades, insulation, accessible cooling
  > circuit pipes, and accessible electrical wiring
> Operation of
  > freezer lid gas strut (chest freezer)
  > display and function keys
  > chamber temperature sensors and alert
  > RS232/RS485 communication port
> Alignment of door handle/sealing of outer door (upright freezer)
> Verification and adjustment of operating parameters
> Maintenance report
> Dated service sticker to confirm Eppendorf Service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (e.g. temperature)
> Basic IQ/OQ report

[1)]according to manufacturer specifications

Protect your priceless samples!

How to protect precious samples in your Eppendorf ULT freezer:

www.eppendorf.link/Services-freezer-video

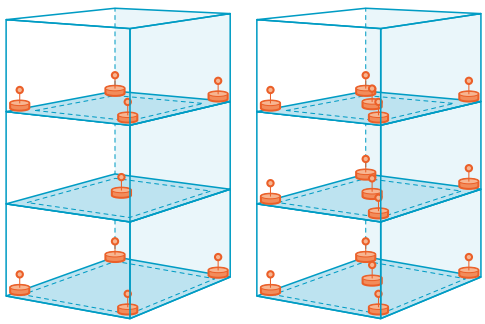
ULT Freezer Service

Multi-Temperature Mapping for Ultra-Low Temperature Upright Freezer
Regular verification with the help of an external, calibrated multi-channel temperature verification system inside your ULT freezer provides you with the security of reliable long-term sample storage.


Our factory-trained and certified service technician will perform an on-site temperature mapping study including a full report stating:

> Minimum, maximum and average temperature of each location
> Full log of raw data of each measurement
> Temperature profile graphic for duration of measuring period
> All relevant calibration certificates

Norms, standards and best practices such as ISPE-Controlled Temperature Chamber Mapping and Monitoring, IEC 60068 - Environmental testing, or Vaisala – 5 Rules of Sensor Placement in Validation/Mapping Applications recommend a temperature mapping of 9 or 15 probes after installation, and subsequently every two years, or when changes are made to the system.



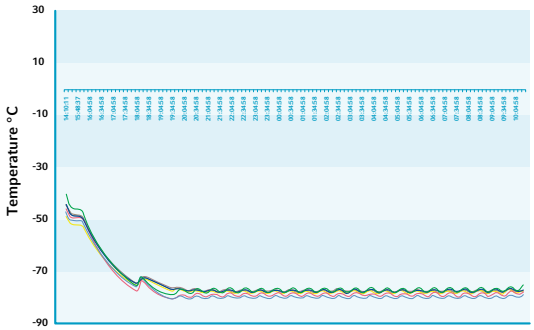A probe holder system (9 and 15 probes) is used to ensure comparable results between different measurements and units



Example of a Multi-Temperature Mapping with 9 probes inside an ULT upright freezer

Your advantages
> 24 hours, 365 days a year reliable storage for temperature-sensitive samples
> Comparable annual temperature distribution results in one or multiple freezers
> Supporting you with audit proof documentation

This service is only available in selected countries. Please contact your local Eppendorf service organization for further information.

Poster maintenance ULT freezer

www.eppendorf.link/Services-freezer-poster

CO_2 Incubator/Shaker Service



CO_2 Incubator/Shaker Service
CO_2 incubators feature complex, dynamic control systems to maintain user-defined culturing parameters for optimized cell growth and proliferation. To ensure reproducible results and to protect your precious cultures from undesirable variables, we check and validate your incubator performance.

Preventive Maintenance services include:
- Checking of
  - installation environment
  - electrical/gas supply and fittings
  - door seals and door hinges
  - all chamber gas, temperature, humidity sensors
  - security of incubator shelf and racking systems
  - sensor covers
  - humidity trays
  - wiring system, PCB's, display, and controller
- Testing of alert functions
- Replace in-line gas filter(s) and auto-zero filter
- Validation/adjustment of operating parameters within specifications
- Maintenance report
- Dated service sticker to confirm Eppendorf Service

Preventive Maintenance services for CellXpert® CS220 Incubator Shaker include:
- Check of installation environment
- Check of electrical/gas supply and fittings
- Replacement of in-line CO_2
- Check shaker platform, flask holder
- Check of shaker drive belt
- Check of functionality of chamber CO_2, temperature sensors and rH sensor
- Maintenance report
- Dated service sticker to confirm Eppendorf Service

Qualification service include:
- Checking of
  - delivery status, and environment
  - initial configuration, functional[1)] and safety checks
- Testing of notification and alert functions
- Verification of instrument parameters[1)] (e.g. temperature, CO_2, speed, alert)
- Basic IQ/OQ report

[1)]according to manufacturer specifications

Special documentation for CellXpert® series:
- Detailed IQ/OQ report
- Handling of deviation list/management
- Signed approval by customer and service technician

Our service culture for peace of mind!

S41i Incubator Shaker Service



S41i Incubator Shaker Service
The versatility of the S41i Incubator Shaker supports simultaneous culture of adherent and suspension cultures. The smallest deviations in the culturing environment can result in undesirable outcomes. To ensure reproducible results and to protect your precious cultures from undesirable variables, we offer a range of maintenance and qualification services.

Preventive Maintenance services include
> Checking of
  > electrical/gas supply and fittings
  > chamber CO_2, temperature sensors
  > security of shaker platform(s) and flask holders
  > security of incubator shelf and racking systems
  > humidity trays
  > shaker drive belt
  > platform support boot seals
> Replace
> in-line CO_2 filter and auto-zero filter
> Validation/adjustment of operating parameters within specifications
> Maintenance report
> Dated service sticker to confirm Eppendorf Service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (e.g. temperature, CO_2, speed, alert)
> Detailed IQ/OQ report

[1)]according to manufacturer specifications

Achieve reliable culturing results with optimized performance of incubating and shaking systems!

How to clean your incubator:

www.eppendorf.link/Services-incubator

Biological Shaker Service



Biological Shaker Service
Biological shakers are required to be in continuous use for years. Small and short-term variations in shaker operation can influence culturing outcomes, with negative effects on yields and/or cell expression. Ensure consistent, reliable shaker performance with our shaker services.

Preventive Maintenance services include:
> Cleaning of condenser
> Lubricate non-sealed shaker bearings, as appropriate
> Checking of
  > installation environment
  > electrical/gas supply and fittings
  > any door/lid open sensors
  > security of doors/lids, handles, door struts and hinges
  > security of shaker mechanism
  > shaker drive motor, and circulation fan
  > shaker drive belt; adjust belt tension as necessary
> Validation/adjustment of operating parameters within specifications
> Maintenance report
> Dated service sticker to confirm Eppendorf Service

Qualification services include:
> Checking of
  > delivery status, and environment
  > initial configuration, functional[1)] and safety checks
> Testing of notification and alert functions
> Verification of instrument parameters[1)] (e.g. rpm, temperature, alerts)
> Detailed IQ/OQ report
> Handling of deviation list/management
> Signed approval by customer and service technician

[1)]according to manufacturer specifications

Care for your shaker – Optimize your cultures!

Service Agreements and Qualification Services Ordering Information

Ordering Information	AdvancedCare Agreement	PremiumCare Agreement	IQ/OQ GxP	OQ GxP	1 Year Extended Warranty[1]	1 Year Extended Warranty plus[2]
	Assured instrument reliability and uptime	Full coverage for instrument reliability and uptime	Qualification services for the regulated environment	Re-Qualification services for the regulated environment	Parts, labor and travel cost are covered in case of a repair	Full coverage for repair, including maintenance for reliability
epMotion® 5070	0082030105	0082030107	0082030030	0082030040	0082030100	0082030102
epMotion® 5073	0082030106	0082030108	0082030031	0082030041	0082030101	0082030103
epMotion® 5075	0082030073	0082030075	0082030032	0082030042	0082030069	0082030071
epMotion® 96 Flex	0082030182	0082030183	0082030179	0082030178	0082030180	0082030181
epMotion® 96	0082030074	0082030076	0082030036	0082030016	0082030070	0082030072
Microcentrifuge w/o refrigeration	0082020325	0082020320	0082020300	0082020305	0082020340	0082020345
Microcentrifuge with refrigeration	0082020326	0082020321	0082020301	0082020306	0082020341	0082020346
Multipurpose centrifuge w/o refrigeration	0082020327	0082020322	0082020302	0082020307	0082020342	0082020347
Multipurpose centrifuge with refrigeration	0082020328	0082020323	0082020303	0082020308	0082020343	0082020348
Multipurpose Centrifuge 592x	0082020331	0082020330	0082020303	0082020308	0082020343	0082020348
High-Speed Centrifuge	0082029327	0082029321	0082029221	0082029227	0082029341	0082029347
Micro Ultracentrifuge	0082029328	0082029319	0082029220	0082029226	0082029339	0082029345
Ultracentrifuge	0082029326	0082029320	0082029220	0082029226	0082029340	0082029346
Vacuum Concentrator	0082020329	0082020324	00820200123)	00820200113)	0082020344	0082020349
Mastercycler®	0082040325	0082040320	0082040300	0082040301	0082040340	0082040345
ULT Freezer	0082070325	0082070320	00820700093)	00820700083)	0082070340	0082070345
CO_2 Incubator	0082060325	0082060320	00820600093)	00820600083)	0082060340	0082060345
CellXpert®	0082060325	0082060320	0082060302	0082060303	0082060340	0082060345
CellXpert® CS220 Incubator Shaker	0082050326	0082050321	0082050302	0082050303	0082050341	0082050346
Incubator Shaker S41i	0082050325	0082050320	0082050300	0082050301	0082050340	0082050345
Shaker - open air	0082080325	0082080320	0082080300	0082080305	0082080340	0082080345
Shaker - heating	0082080326	0082080321	0082080301	0082080306	0082080341	0082080346
Shaker - heating & cooling	0082080327	0082080322	0082080302	0082080307	0082080342	0082080347
Shaker - S44i	0082080329	0082080324	0082080304	0082080309	0082080344	0082080349
Temperature control & mixing instruments[4]	0082100325	0082100320	0082100300	0082100301	0082100340	0082100345

[1] Purchased once within the standard warranty period. Valid for one year following the standard warranty period. [2] Purchased within the standard warranty period. Valid following the standard warranty period. Our General Terms and Conditions of Sale and Delivery contain information about our standard warranty periods. [3] Non-GxP compliant. [4] Eppendorf ThermoMixer®/Eppendorf ThermoStat, MixMate®

Service Products

Further Services

Ordering information

Description	Order no.
ISO 23783 single-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) without preventive maintenance, in accordance with ISO 23783, as-found calibration	0082030239
ISO 237834-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-left calibration	0082030243
ISO 237838-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) without preventive maintenance, in accordance with ISO 23783, as-found calibration	0082030241
ISO 23783 single-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-left calibration	0082030242
ISO 237834-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) without preventive maintenance, in accordance with ISO 23783, as-found calibration	0082030240
ISO 237838-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-left calibration	0082030244
ISO 23783 single-channel epMotion® dispensing tool calibration - professional, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-found calibration (3x10), as-left calibration	0082030245
ISO 237834-channel epMotion® dispensing tool calibration - professional, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-found calibration (3x10), as-left calibration	0082030246
ISO 237838-channel epMotion® dispensing tool calibration - professional, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-found calibration (3x10), as-left calibration	0082030247
epMotion® 96 Flex dispensing head calibration, 5 measurements per test volume (min, mid, max each with smaller and larger tip) with preventive maintenance, in accordance with ISO 23783, as-left calibration - 6x5	0082030052
UV-Lamp exchange in epMotion® CleanCap	5073920070

Info: Our service offers may differ by country. Please contact your local service representative for more information.

Note: The abbreviation PM stands for preventive maintenance

Ordering information

Description	Order no.
ISO 17025 single-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) without preventive maintenance, in accordance with ISO 23783, as-found calibration	0082030230
ISO 170254-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) without preventive maintenance, in accordance with ISO 23783, as-found calibration	0082030236
ISO 170258-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) without preventive maintenance, in accordance with ISO 23783, as-found calibration	0082030231
ISO 17025 single-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-left calibration	0082030232
ISO 170254-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-left calibration	0082030237
ISO 170258-channel epMotion® dispensing tool calibration, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-left calibration	0082030233
ISO 17025 single-channel epMotion® dispensing tool calibration - professional, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-found calibration (3x10), as-left calibration	0082030234
ISO 170254-channel epMotion® dispensing tool calibration - professional, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-found calibration (3x10), as-left calibration	0082030238
ISO 170258-channel epMotion® dispensing tool calibration - professional, 10 measurements per test volume (min, mid, max) with preventive maintenance, in accordance with ISO 23783, as-found calibration (3x10), as-left calibration	0082030235

Info: only available in selected markets (currently Nordic, Benelux, Great Britain, and Ireland)

Instrument Installation and Maintenance Services Ordering Information	Installation Services	Preventive Maintenance	Device Check
epMotion® 5070	0082030081	0082030010	N/A
epMotion® 5073	0082030111	0082030011	N/A
epMotion® 5075	0082030141	0082030012	N/A
epMotion® 96 Flex	N/A	0082030177	N/A
epMotion® 96	0082030171	0082030002	N/A
Microcentrifuge w/o refrigeration	0082020101	0082020260	0082020270
Microcentrifuge with refrigeration	0082020131	0082020261	0082020271
Multipurpose Centrifuge w/o refrigeration	0082020161	0082020262	0082020272
Multipurpose Centrifuge with refrigeration	0082020191	0082020263	0082020273
Multipurpose Centrifuge 592x	0082020191	0082020264	0082020274
High-Speed Centrifuge	0082029211	0082029251	N/A
Micro-Ultracentrifuge	0082029210	0082029250	N/A
Ultracentrifuge	0082029210	0082029250	N/A
Vacuum Concentrator	0082020212	0082020265	0082020275
Mastercycler®	0082040131	0082040260	N/A
ULT Freezer	0082070071	0082070260	0082070270
CO_2 Incubator	0082060071	0082060260	0082060270
CellXpert® CS220 Incubator Shaker	0082050061	0082050261	0082050271
S41i Incubator Shaker	0082050021	0082050260	0082050270
Open Air Shaker	0082080091	0082080260	0082080270
Shaker with Heating	0082080121	0082080261	0082080271
Shaker with Heating/Cooling	0082080151	0082080262	0082080272
Shaker S44i	0082080231	0082080264	0082080274
Temperature control & mixing instruments[1)]	0082100061	0082100260	N/A
VisioNize®	0082160001		

[1)] Eppendorf ThermoMixer®/Eppendorf ThermoStat, MixMate®

Info: Our service offers may differ by country. Please contact your local service representative for more information.

Rotor Inspection Services for Microcentrifuges and Multipurpose Centrifuges Ordering Information	
Fixed-angle rotors	5424860109
Swing-bucket rotors	5810860113

Temperature Verification Services Ordering Information	
Eppendorf ThermoMixer®/Eppendorf ThermoStat/MixMate®	0082100025
Eppendorf ThermoMixer®/Eppendorf ThermoStat/MixMate® - ISO 17025	0082100026
Eppendorf ThermoMixer®/Eppendorf ThermoStat/MixMate® - multi-channel	0082100023
Eppendorf ThermoMixer®/Eppendorf ThermoStat/MixMate® - multi-channel - ISO 17025	0082100024
Mastercycler® - sequential	6321897000
Mastercycler® - ISO 17025 - sequential	0082040027
Mastercycler® - parallel	6321897507
Mastercycler® - ISO 17025 - parallel	0082040030

Bioprocess Service



Bioprocess Performance Plans
Bioprocess systems include several sophisticated technologies. Peak performance requires smooth interplay of the subsystems and fully functioning consumable parts. Regular maintenance by qualified engineers helps to ensure reliable operation, while deferring it can cause unreliable results, expensive repairs, and prolonged downtime. Eppendorf Bioprocess Performance Plans help you to maintain the optimal performance of your Eppendorf equipment over years of frequent use.

Download the bioprocess catalog

www.eppendorf.link/catalog

You will find details and ordering information for all Bioprocess Performance Plans in the Bioprocess Catalog!



EU-IVD Centrifuges



Are the tools in your lab compliant to the IVD legislation?
Do they need to be?

To support regulatory compliance, Eppendorf offers two versions of our benchtop centrifuges:

An IVDR compliant, CE marked version for diagnostic applications (according to the EU In Vitro Diagnostic Regulation (IVDR) 2017/746), and a General Lab Product version for research applications.

Choosing the right version for your laboratory is easy

If your lab work is predominantly a clinical or diagnostic application IVDR compliant products can add peace of mind to support your documentation and accreditation requirements. Eppendorf has taken all measures needed to make sure the IVDR compliant documentation is fulfilled and furthermore CE certificates are provided.
If your lab work is rather research oriented, no matter if it is basic research or teaching or all the way up to pharmacological research and development, the General Lab Product version is the right choice. It comes with a large variety of research application examples and testimonials.

Quality promise of Eppendorf

Both versions follow the same extremely high quality standards at Eppendorf. We are not making any compromises in precision, accuracy, robustness, safety and ergonomics. By giving you, our customer, the choice we provide you with dedicated products for clinical purposes which have been specifically intended for that end and are not made for other applications from an unrelated field. We want you to concentrate on your work, for the better of mankind, and enable you to take care of necessary IVDR compliant documentation.

Learn more about the Eppendorf centrifuge portfolio!

www.eppendorf.link/IVDCentrifugation

Your local distributor: www.eppendorf.link/contact
Eppendorf SE · Barkhausenweg 1 · 22339 Hamburg · Germany · eppendorf@eppendorf.com · www.eppendorf.com · www.eppendorf.link/eshop

MiniSpin®/MiniSpin® plus



CE*

* The MiniSpin®/MiniSpin® plus is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge MiniSpin®, keypad, non-refrigerated, with Rotor F-45-12-11, 230 V/50 – 60 Hz (EU)	5452000018
Centrifuge MiniSpin® plus, keypad, non-refrigerated, with Rotor F-45-12-11, 230 V/50 – 60 Hz (EU)	5453000011
Rotor F-45-12-11, angle 45°, 12 places, max. tube diameter 11 mm, incl. rotor lid and rotor nut, MiniSpin®/MiniSpin® plus	5452720008
Rotor F-55-16-5 PCR, angle 55°, 16 places, max. tube diameter 5 mm, incl. rotor lid (aluminum), MiniSpin®/MiniSpin® plus	5452727007
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5418 R



CE*

* The Centrifuge 5418 R is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5418 R, rotary knobs, refrigerated, with Rotor FA-45-18-11 and rotor lid, 230 V/50 – 60 Hz (EU)	5401000013
Adapter, for 1 PCR tube (0.2 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425715005
Adapter, for 1 sample tube (0.5 mL, max. Ø 8 mm) or 1 Microtainer® (0.6 mL, max. Ø 8 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425716001
Adapter, for 1 micro test tube (0.4 mL, max. Ø 6 mm), for all 1.5/2.0 mL rotors, 6 pcs.	5425717008

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5420



CE*

* The Centrifuge 5420 is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose.This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5420, keypad, non-refrigerated, without rotor, 230 V/50/60 Hz (EU)	5420000210
Centrifuge 5420, keypad, non-refrigerated, with aerosol-tight Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5420000016

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5425/5425 R



CE*



* The Centrifuge 5425/5425 R is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5425, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5405000212
Centrifuge 5425, rotary knobs, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5405000611
Centrifuge 5425, keypad, non-refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5405000018
Centrifuge 5425, rotary knobs, non-refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5405000417
Centrifuge 5425, rotary knobs, non-refrigerated, Molecular Biology Solution, with Rotor FA-18x2-Kit, 230 V/50 – 60 Hz (EU)	5405000158
Centrifuge 5425 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5406000216
Centrifuge 5425 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5406000615
Centrifuge 5425 R, keypad, refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5406000011
Centrifuge 5425 R, rotary knobs, refrigerated, with Rotor FA-24x2, 230 V/50 – 60 Hz (EU)	5406000410

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5427 R

New



CE*

HYDROCARBON COOLING

* The Centrifuge 5427 R is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5427 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5429000015
Centrifuge 5427 R, rotary knobs, refrigerated, with Rotor FA-45-30-11, 230 V/50 – 60 Hz (EU)	5429000315
Centrifuge 5427 R, rotary knobs, refrigerated, with Rotor FA-45-48-11, 230 V/50 – 60 Hz (EU)	5429000215

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5430/5430 R



* The Centrifuge 5430/5430 R is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5430, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5427000011
Centrifuge 5430, rotary knobs, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5427000615
Centrifuge 5430, keypad, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5427000216
Centrifuge 5430, rotary knobs, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5427000410
Centrifuge 5430 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5428000210
Centrifuge 5430 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5428000619
Centrifuge 5430 R, keypad, refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5428000015
Centrifuge 5430 R, rotary knobs, refrigerated, with Rotor FA-45-30-11 incl. rotor lid, 230 V/50 – 60 Hz (EU)	5428000414

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5702/5702 R/5702 RH



CE*

* The Centrifuge 5702/5702 R/5702 RH is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5702, rotary knobs, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5702000019
Centrifuge 5702, rotary knobs, non-refrigerated, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5702000329
Centrifuge 5702 R, rotary knobs, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5703000012
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 13/16 mm blood collection tubes, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5703000322
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5703000420
Centrifuge 5702 RH, rotary knobs, refrigerated/heated, without rotor, 230 V/50 – 60 Hz (EU)	5704000016
Centrifuge 5702, rotary knobs, non-refrigerated, with Rotor A-4-38 incl. adapters for round-bottom tubes 4 – 10 mL and adapters for round-bottom tubes 2.6 – 7 mL, 2 sets of 2 adapters, 230 V/50 – 60 Hz (EU)	5702000510

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5804/5804 R and 5810/5810 R



* The Centrifuge 5804/5804 R and 5810/5810 R is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5804, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5804000013
Centrifuge 5804 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5805000017
Centrifuge 5810, keypad, non-refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5810000017
Centrifuge 5810 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5811000010

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge Packages 58xx Family

Ordering information

Description	Conical tubes	Order no.
Centrifuge 5804, keypad, non-refrigerated, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	16 × 15 mL/4 × 50 mL	5804000323
Centrifuge 5804 R, keypad, refrigerated, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	16 × 15 mL/4 × 50 mL	5805000327
Centrifuge 5804, keypad, non-refrigerated, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	32 × 15 mL/16 × 50 mL	5804000528
Centrifuge 5804 R, keypad, refrigerated, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	32 × 15 mL/16 × 50 mL	5805000629
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	36 × 15 mL/16 × 50 mL	5810000327
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	36 × 15 mL/16 × 50 mL	5811000320
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	48 × 15 mL/20 × 50 mL	5810000424
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	48 × 15 mL/20 × 50 mL	5811000428
Centrifuge 5810, keypad, non-refrigerated, with Rotor S-4-104 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL	5810000521
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 15/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL	5811000622
Centrifuge 5810, keypad, non-refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL 92 × 13 mm/80 × 16 mm	5810000629
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL 92 × 13 mm/80 × 16 mm	5811000827

↗ Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5910 Ri



CE*

* The Centrifuge 5910 Ri is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5910 Ri, touch interface, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5943000017

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge Packages 5910 Ri

Ordering information

Description	Conical tubes	Order no.
Centrifuge 5910 Ri, touch interface, refrigerated, with Rotor S-4x750, incl. round buckets and adapters for 5 mL/15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL	5943000511
Centrifuge 5910 Ri, touch interface, refrigerated, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes and plates, 230 V/50 – 60 Hz (EU)	68 × 15 mL/36 × 50 mL	5943000319
Centrifuge 5910 Ri, touch interface, refrigerated, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes, 175 – 250 mL bottles and plates, 230 V/50 – 60 Hz (EU)	68 × 15 mL/28 × 50 mL	5943000211

Ordering information for other voltage options can be found in the “Voltage Version” chapter.

Centrifuge 5920 R



CE*

* The Centrifuge 5920 R is a non-automatic centrifuge for the separation of liquid substance mixtures from the human body and is specifically intended to be used as an accessory together with an in vitro diagnostic device and to enable its use according to its intended purpose. This product complies with the requirements of the EU In Vitro Diagnostics Regulation (IVDR) 2017/746.

Ordering information

Description	Order no.
Centrifuge 5920 R, keypad, refrigerated, without rotor, 230 V/50 – 60 Hz (EU)	5948000018

Ordering information for other voltage options can be found in the "Voltage Version" chapter.

Centrifuge Packages 5920 R

Ordering information

Description	Conical tubes	Order no.
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. high-capacity buckets and adapters for 15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	108 × 15 mL/52 × 50 mL	5948000212
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for 5 mL/15 mL/25 mL/50 mL conical tubes and plates, 230 V/50 – 60 Hz (EU)	96 × 15 mL/40 × 50 mL	5948000914
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. plate/tube buckets and adapters for 15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	88 × 15 mL/40 × 50 mL	5948000417
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. round buckets and adapters for 15 mL/50 mL conical tubes, 230 V/50 – 60 Hz (EU)	56 × 15 mL/28 × 50 mL	5948000310
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for round-bottom tubes with diameter 13/16 mm, 230 V/50 – 60 Hz (EU)	108 × 15 mL/52 × 50 mL 196 × 13 mm/148 × 16 mm	5948000816

Ordering information for other voltage options can be found in the "Voltage Version" chapter.

Order Numbers for Different Mains Voltage Versions



The following products are available in the listed mains voltage versions. For mains voltage versions for which no separate order number is listed, the valid order numbers are also those listed in the first column or in the product description. The versions marked n.a. are not available. Order-related production is marked with *.

Temperature Control and Mixing

Power supply	Europe	UK/HKG	Australia	China	Japan	Argentinia	ROW
Eppendorf ThermoMixer® C, basic device without thermoblock	5382 000 015	5382 000 031	5382 000 066	5382 000 074	5382 000 023	5382 000 082	5382 000 023
Eppendorf ThermoMixer® F0.5, with thermoblock for 24 reaction vessels 0.5 mL	5386 000 010	5386 000 036	5386 000 060	5386 000 079	5386 000 028	5386 000 087	5386 000 028
Eppendorf ThermoMixer® F1.5, with thermoblock for 24 reaction vessels 1.5 mL	5384 000 012	5384 000 039	5384 000 063	5384 000 071	5384 000 020	5384 000 080	5384 000 020
Eppendorf ThermoMixer® F2.0, with thermoblock for 24 reaction vessels 2.0 mL	5387 000 013	5387 000 030	5387 000 064	5387 000 072	5387 000 021	5387 000 080	5387 000 021
Eppendorf ThermoMixer® FP, with thermoblock for Microplates and Deepwell Plates, including lid	5385 000 016	5385 000 032	5385 000 067	5385 000 075	5385 000 024	5385 000 083	5385 000 024
Eppendorf ThermoStat C, basic device without thermoblock	5383 000 019	5383 000 035	5383 000 060	5383 000 078	5383 000 027	5383 000 086	5383 000 027
MixMate®, basic device without tube holders	5353 000 510	5353 000 537	5353 000 545	5353 000 553	5353 000 529	5353 000 561	5353 000 022

Centrifuges and Rotors - General Lab Products

Power supply	Europe	UK/HKG	Australia	China	Japan	Argentinia	ROW
Centrifuge MiniSpin® plus, non-refrigerated, with Rotor F-45-12-11	5453 000 015	5453 000 060	5453 000 089	5453 000 097	5453 000 038	5453 000 054	n.a.
Centrifuge MiniSpin®, non-refrigerated, with Rotor F-45-12-11	5452 000 010	5452 000 060	5452 000 085	5452 000 093	5452 000 034	5452 000 050	5452 000 816
Centrifuge 5418 R, refrigerated, with Rotor FA-45-18-11 and rotor lid	5401 000 010	5401 000 060	5401 000 080	5401 000 099	5401 000 030	5401 000 056	5401 000 021
Centrifuge 5420, keypad, non-refrigerated, without rotor	5420 000 318	5420 000 369	5420 000 288	5420 000 296	5420 000 237	5420 000 253	5420 000 229
Centrifuge 5420, keypad, non-refrigerated, with aerosol-tight Rotor FA-24x2	5420 000 113	5420 000 164	5420 000 083	5420 000 091	5420 000 032	5420 000 059	5420 000 024
Centrifuge 5425, keypad, non-refrigerated, without rotor	5405 000 310	5405 000 360	5405 000 280	5405 000 298	n.a.	5405 000 255	5405 000 220
Centrifuge 5425, rotary knobs, non-refrigerated, without rotor	5405 000 719	5405 000 760	5405 000 689	5405 000 697	5405 000 638	5405 000 654	5405 000 620
Centrifuge 5425, keypad, non-refrigerated, with Rotor FA-24x2	5405 000 115	5405 000 166	5405 000 085	5405 000 093	n.a.	5405 000 050	5405 000 026
Centrifuge 5425, rotary knobs, non-refrigerated, with Rotor FA-24x2	5405 000 514	5405 000 565	5405 000 484	5405 000 492	5405 000 433	5405 000 450	5405 000 425
Centrifuge 5425, rotary knobs, non-refrigerated, Molecular Biology Solution, with Rotor FA-18x2-Kit	5405 000 174	5405 000 182	5405 000 190	5405 000 204	n.a.		n.a.
Centrifuge 5425 R, keypad, refrigerated, without rotor	5406 000 313	5406 000 364	5406 000 283	5406 000 291		5406 000 259	5406 000 224
Centrifuge 5425 R, rotary knobs, refrigerated, without rotor	5406 000 712	5406 000 763	5406 000 682	5406 000 690	5406 000 631	5406 000 658	5406 000 623
Centrifuge 5425 R, keypad, refrigerated, with Rotor FA-24x2	5406 000 119	5406 000 160	5406 000 089	5406 000 097		5406 000 054	5406 000 020
Centrifuge 5425 R, rotary knobs, refrigerated, with Rotor FA-24x2	5406 000 518	5406 000 569	5406 000 488	5406 000 496	5406 000 437	5406 000 453	5406 000 429
Centrifuge 5427 R, rotary knobs, refrigerated, without rotor	5429 000 010	5429 000 060	5429 000 083	5429 000 097	5429 000 037	5429 000 053	5429 000 027
Centrifuge 5427 R, rotary knobs, refrigerated, with Rotor FA-45-30-11	5429 000 310	5429 000 360	5429 000 383	5429 000 397	5429 000 333	5429 000 353	5429 000 327
Centrifuge 5427 R, rotary knobs, refrigerated, with Rotor FA-45-48-11	5429 000 210	5429 000 260	5429 000 283	5429 000 297	5429 000 233	5429 000 253	5429 000 227
Centrifuge 5430, keypad, non-refrigerated, without rotor	5427 000 015	5427 000 060	5427 000 089	5427 000 097	5427 000 038	5427 000 054	5427 000 020
Centrifuge 5430, rotary knobs, non-refrigerated, without rotor	5427 000 610	5427 000 660	5427 000 682	5427 000 690	5427 000 631	5427 000 658	5427 000 623
Centrifuge 5430, keypad, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5427 000 210	5427 000 260	5427 000 283	5427 000 291	5427 000 232	5427 000 259	5427 000 224
Centrifuge 5430, rotary knobs, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5427 000 415	5427 000 465	5427 000 488	5427 000 496	5427 000 437	5427 000 453	5427 000 429
Centrifuge 5430, rotary knobs, non-refrigerated, Low-Throughput Plate Solution, with Rotor A-2-MTP	5427 000 178	5427 000 186	5427 000 194	5427 000 178	5427 000 275	n.a.	n.a.
Centrifuge 5430 R, keypad, refrigerated, without rotor	5428 000 205	5428 000 255	5428 000 287	5428 000 295		5428 000 252	5428 000 228
Centrifuge 5430 R, rotary knobs, refrigerated, without rotor	5428 000 610	5428 000 655	5428 000 686	5428 000 694	5428 000 635	5428 000 651	5428 000 627
Centrifuge 5430 R, keypad, refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5428 000 010	5428 000 060	5428 000 082	5428 000 090		5428 000 058	5428 000 023
Centrifuge 5430 R, rotary knobs, refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5428 000 410	5428 000 460	5428 000 481	5428 000 490	5428 000 430	5428 000 457	5428 000 422
Centrifuge 5702, rotary knobs, non-refrigerated, without rotor	5702 000 010	5702 000 065	5702 000 086	5702 000 094	5702 000 043	5702 000 051	5702 000 817
Centrifuge 5702, rotary knobs, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters	5702 000 320	5702 000 365	5702 000 388	5702 000 396	n.a.	5702 000 353	5702 000 345
Centrifuge 5702 R, rotary knobs, refrigerated, without rotor	5703 000 010	5703 000 060	5703 000 080	5703 000 098	5703 000 039	5703 000 055	5703 000 047
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 13/16 mm blood collection tubes, 2 sets of 2 adapters	5703 000 320	5703 000 360	5703 000 381	5703 000 390	n.a.	5703 000 357	5703 000 349
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters	5703 000 425	5703 000 460	5703 000 489	5703 000 497	5703 000 411	5703 000 454	5703 000 470
Centrifuge 5702 RH, rotary knobs, refrigerated/heated, without rotor	5704 000 010	5704 000 060	5704 000 083	5704 000 091	5704 000 032	5704 000 059	5704 000 040
Centrifuge 5702, rotary knobs, non-refrigerated, with Rotor A-4-38 incl. adapters for round-bottom tubes 4 – 10 mL and adapters for round-bottom tubes 2.6 – 7 mL, 2 sets of 2 adapters	5702 000 515		5702 000 566	5702 000 574	5702 000 590	5702 000 540	5702 000 582

Centrifuges and Rotors - General Lab Products

Power supply	Europe	UK/HKG	Australia	China	Japan	Argentinia	ROW
Centrifuge 5804, keypad, without rotor	5804 000 010	5804 000 060	5804 000 080	5804 000 099	5804 000 048	5804 000 056	5804 000 170
Centrifuge 5804 R, keypad, refrigerated, without rotor	5805 000 010	5805 000 060	5805 000 084	5805 000 092	*	5805 000 050	*
Centrifuge 5804, keypad, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes	5804 000 320	5804 000 360	5804 000 382	5804 000 390	*	5804 000 358	5804 000 374
Centrifuge 5804, keypad, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes	5804 000 520	5804 000 565	5804 000 587	5804 000 595	*	5804 000 552	5804 000 544
Centrifuge 5804 R, keypad, refrigerated, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes	5805 000 320	5805 000 365	5805 000 386	5805 000 394	*	5805 000 351	5805 000 378
Centrifuge 5804 R, keypad, refrigerated, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes	5805 000 620	5805 000 665	5805 000 688	5805 000 696	*	5805 000 653	5805 000 645
Centrifuge 5810, keypad, non-refrigerated, without rotor	5810 000 010	5810 000 060	5810 000 084	5810 000 092	*	5810 000 050	5805 000 181
Centrifuge 5810 R, keypad, refrigerated, without rotor	5811 000 015	5811 000 065	5811 000 088	5811 000 096	*	5811 000 053	5811 000 231
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes	5811 000 325	5811 000 360	5811 000 380	5811 000 398	*	5811 000 355	5811 000 371
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes	5810 000 420	5810 000 460	5810 000 483	5810 000 491	*	5810 000 459	5810 000 475
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes	5811 000 420	5811 000 465	5811 000 487	5811 000 495	*	5811 000 452	5811 000 479
Centrifuge 5810, keypad, non-refrigerated, Classic Cell Culture Solution, with Rotor S-4-104 including 4 adapters for 5/15 mL tubes and 4 adapters for 50 mL conical tubes	5810 000 525	5810 000 560	5810 000 580	5810 000 599	*	5810 000 556	5810 000 548
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 15/50 mL conical tubes	5811 000 620	5811 000 660	5811 000 681	5811 000 690	*	5811 000 657	5811 000 649
Centrifuge 5810, keypad, non-refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes	5810 000 620	5810 000 665	5810 000 688	5810 000 696	*	5810 000 653	5810 000 670
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes	5811 000 820	5811 000 865	5811 000 886	5811 000 894	*	5811 000 851	5811 000 843
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes	5810 000 320	5810 000 365	5810 000 386	5810 000 394	*	5810 000 351	5810 000 378
Centrifuge 5910 Ri, refrigerated, without rotor	5943 000 011	5943 000 061	5943 000 084	5943 000 092	5943 000 033	5943 000 058	5943 000 025
Centrifuge 5910 Ri, refrigerated, with Rotor FA-6x50	5943 000 149	5943 000 157	5943 000 165	5943 000 203			
Centrifuge 5910 Ri, refrigerated, with Rotor S-4x750, incl. round buckets and adapters for 5 mL/15 mL/50 mL conical tubes	5943 000 516	5943 000 561	5943 000 581	5943 000 599	5943 000 538	5943 000 554	5943 000 521
Centrifuge 5910 Ri, refrigerated, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes and plates	5943 000 316	5943 000 361	5943 000 386	5943 000 394	5943 000 335	5943 000 351	5943 000 327
Centrifuge 5910 Ri, refrigerated, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes, 175 – 250 mL bottles and plates	5943 000 216	5943 000 266	5943 000 289	5943 000 297	5943 000 238	5943 000 254	5943 000 228
Centrifuge 5910 Ri, refrigerated, with Rotor S-4xUniversal, incl. universal buckets, adapters for 175 - 250 mL and 1000 mL bottles and 1000 mL bottles	5943 000 173	5943 000 181	5943 000 198	5943 000 301			
Centrifuge 5910 Ri, refrigerated, with Rotor S-4xUniversal, incl. universal buckets, adapters for 5 mL/15 mL/50 mL conical tubes and plates, adapters for 1000 mL bottles and 1000 mL bottles	5943 000 904	5943 000 912	5943 000 921	5943 000 939	5943 000 947		
Centrifuge 5920 R, refrigerated, without rotor	5948 000 010	5948 000 060	5948 000 085	5948 000 093	5948 000 026	5948 000 050	5948 000 026
Centrifuge 5920 R, refrigerated, with Rotor S-4xUniversal-Large	5948 000 910	5948 000 960	5948 000 980	5948 000 999	5948 000 921	5948 000 956	5948 000 921
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for 5 mL/15 mL/25 mL/50 mL conical tubes and plates	5948 000 911	5948 000 961	5948 000 981	5948 000 998		5948 000 957	5948 000 922
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for round-bottom tubes with diameter 13/16 mm	5948 000 810	5948 000 860	5948 000 883	5948 000 891		5948 000 859	5948 000 824
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. high-capacity buckets and adapters for 15 mL/50 mL conical tubes	5948 000 210	5948 000 260	5948 000 280	5948 000 298	5948 000 220	5948 000 255	5948 000 220
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. plate/tube buckets and adapters for 15 mL/50 mL conical tubes	5948 000 410	5948 000 460	5948 000 484	5948 000 492	5948 000 425	5948 000 450	5948 000 425
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. round buckets and adapters for 15 mL/50 mL conical tubes	5948 000 315	5948 000 365	5948 000 387	5948 000 395	5948 000 328	5948 000 352	5948 000 328
Centrifuge 5920 R, keypad, refrigerated, High-Throughput Screening Solution, with Rotor S-4x1000, incl. plate/tube bucket and plate carrier	5948 000 174	5948 000 182	5948 000 190	5948 000 204			

Centrifuges and Rotors - General Lab Products

Power supply	Europe	UK/HKG	Australia	China	Japan	Argentinia	ROW
Concentrator plus basic device, w/o pump, with Rotor F-45-48-11	5305 000 100	5305 000 169	5305 000 185	5305 000 193	5305 000 142	5305 000 150	5305 000 177
Concentrator plus complete system, with integrated diaphragm vacuum pump, with Rotor F-45-48-11	5305 000 304	5305 000 363	5305 000 380	5305 000 398	5305 000 347	5305 000 355	5305 000 371
Concentrator plus complete system, with integrated diaphragm vacuum pump, without rotor	5305 000 509	5305 000 568	5305 000 584	5305 000 592	5305 000 541	5305 000 550	5305 000 576
Concentrator plus complete system, with integrated diaphragm vacuum pump, with connection, e.g., for a gel dryer, without rotor	5305 000 703	5305 000 762	5305 000 589	5305 000 797	5305 000 746	5305 000 754	5305 000 770

Power supply	230V Variant, no plug*	208V Variant, NEMA 6-30P plug	220V Variant, no plug*	200V Variant, no plug*
Example regions and countries	EU and India	USA	Australia, New Zealand, SEA, China	Japan
High-Speed Centrifuge CR22N	5721 220 012	5721 220 013	5721 220 011	5721 220 000
CR22N Harvesting Bundle (4 x 1.5 L), refrigerated, High-Speed Centrifuge CR22N incl. rotor R9A2 and 4 x 1.5 L triangular bottles	5721 261 412	5721 261 413	5721 261 411	-
High-Speed Centrifuge CR30NX, refrigerated	5721 300 012	5721 300 013	5721 300 011	5721 300 010
CR30NX Harvesting Bundle (4 x 1.5 L), refrigerated, HighSpeed Centrifuge CR30NX incl. rotor R9A2 and 4 x 1.5 L triangular bottles	5721 351 512	5721 351 513	5721 351 511	-
Centrifuge CP100NX, refrigerated, touch interface	5720 110 012	5720 110 013	5720 110 011	5720 110 010
Centrifuge CP90NX, refrigerated, touch interface	5720 109 012	5720 109 013	5720 109 011	5720 109 010
Centrifuge CP80NX, refrigerated, touch interface	5720 108 012	5720 108 013	5720 108 011	5720 100 810

Power supply	230V Variant*	120V Variant, NEMA 5-15 plug	220V Variant*	100V Variant*
Example regions and countries	EU and India	USA	Australia, New Zealand, SEA, China	Japan
Centrifuge CS150FNX, refrigerated, floorstanding, touch interface	5720 121 511	5720 121 513	5720 121 501	5720 121 500
Centrifuge CS150NX, refrigerated, benchtop, touch interface	5720 131 511	5720 131 513	5720 131 501	5720 131 500

* Inquire with our service experts to install your fitting plug

PCR

Power supply	Europe	UK/HKG	Australia	China	Japan	Argentinia	ROW
Mastercycler® X40	6381 000 018	6381 000 042	6381 000 069	6381 000 077	6381 000 018	6381 000 085	n.a.
Mastercycler® nexus GX2	6336 000 015	6336 000 040	6336 000 066	6336 000 074	n.a.	6336 000 082	6336 000 023
Mastercycler® nexus GX2e	6338 000 012	6338 000 047	6338 000 063	6338 000 071	n.a.	6338 000 080	6338 000 020
Mastercycler® nexus X2	6337 000 019	6337 000 043	6337 000 060	6337 000 078	6337 000 027	6337 000 086	n.a.
Mastercycler® nexus X2e	6339 000 016	6339 000 040	6339 000 067	6339 000 075	n.a.	6339 000 083	6339 000 024
Mastercycler® X50s	6311 000 010	6311 000 045	6311 000 061	6311 000 070	n.a.	6311 000 088	n.a.
Mastercycler® X50a	6313 000 018	6313 000 042	6313 000 069	6313 000 077	n.a.	6313 000 085	n.a.
Mastercycler® X50h	6316 000 019	6316 000 043	6316 000 060	6316 000 078	n.a.	6316 000 086	n.a.
Mastercycler® X50i	6301 000 012	6301 000 047	6301 000 063	6301 000 071	n.a.	6301 000 080	n.a.
Mastercycler® X50l	6303 000 010	6303 000 044	6303 000 060	6303 000 079	n.a.	6303 000 087	n.a.
Mastercycler® X50t	6306 000 010	6306 000 045	6306 000 061	6306 000 070	n.a.	6306 000 088	n.a.
HeatSealer S100, incl. PCR Plate Adapter	5391 000 001	5391 000 036	5391 000 044	5391 000 060	n.a.	5391 000 079	5391 000 010
HeatSealer S200, incl. PCR Plate Adapter	5392 000 005	5392 000 030	5392 000 048	5392 000 064	n.a.	5392 000 072	5392 000 013

Freezers

Power supply	Europe/UK	Australia	China	115 V, 60 Hz	USA	Japan
CryoCube® F570n, 570 L, classic interface, green cooling liquids, air cooling, handle left side, 5 shelves	F571300031	F571300033	F571300034	F571200035	F571400035	
CryoCube® F570h, 570 L, classic interface, VIP, green cooling liquids, air cooling, handle left side, 5 shelves	F571340031	F571340033	F571340034	F571240035		
CryoCube® F570hw, 570 L, classic interface, VIP, green cooling liquids, water cooling, handle left side, 5 shelves	F571340131	F571340133	F571340134			
CryoCube® F440h, 440 L, classic interface, VIP, green cooling liquids, air cooling, handle left side, 5 shelves	F440340031	F440340033	F440340034	F440240035		
CryoCube® F440n, 440 L, classic interface, green cooling liquids, air cooling, handle left side, 5 shelves	F440300031	F440300033	F440300034	F440200035	F440400035	
CryoCube® FC660h, ULT chest freezer, with LED interface, green cooling liquids, and air-cooling	F660320001	F660320003	F660320004			
CO_2 back-up system, for Innova® U101, U360, U535, U725/ -G, C585, C760, CryoCube® F101h and F740 series	U9043-0004			U9043-0002		F652999005
LN_2 back-up system, for Innova® U101, U360, U535, U725/ -G, C585, C760, CryoCube® F101h and F740 series	U9044-0004			U9044-0002		F652999006
CO_2 back-up system, for CryoCube® F440/ F570/ FC660 series, Premium U410, HEF® U410	U9043-0008			U9043-0006		
LN_2 back-up system, for CryoCube® F440/ F570/ FC660 series, Premium U410, HEF® U410	U9044-0008			U9044-0006		

Power supply	Europe	UK/HKG	Australia	China	USA	Japan
CryoCube® F101h, 101 L, classic interface, VIP, green cooling liquids, air cooling, handle right side, 2 shelves	F101340061	F101340062	F101340063	F101340064	F101240065	-
CryoCube® F740h, 3 c., 740 L, ULT freezer, with LED interface, green cooling liquids, and air-cooling, handle left side, 3 shelves	F740340011	F740340012	F740340013	F740340014	F740540015	F740040016
CryoCube® F740h, 5 c., 740 L, ULT freezer, with LED interface, green cooling liquids, and air-cooling, handle left side, 5 shelves	F740340031	F740340032	F740340033	F740340034	F740540035	F740400036
CryoCube® F740hi, 5 c., 740 L, ULT freezer, with touchscreen interface, green cooling liquids, and air-cooling, handle left side, 5 shelves	F740320031	F740320032	F740320033	F740320034	F740520035	F740020036
CryoCube® F740hi, 3 c., 740 L, ULT freezer, with touchscreen interface, green cooling liquids, and air-cooling, handle left side, 3 shelves	F740320011	F740320012	F740320013	F740320014	F740520015	F740020016
Eppendorf RackScan b, scanner (bottom reading) for 2D-coded tubes in SBS racks and cryostorage boxes, incl. software RackScan Analyzer	6002000006	6002000111				

Cell Incubation

CellXpert® C170i Ordering Information

Device Options				Order no				
Door Segments	Door Handle	O_2 Control	Humidity Monitor/ Water Level Sensor	230 V, 50/60 Hz European	230 V, 50/60 Hz UK/HKG	230 V, 50/60 Hz Australia	230 V, 50/60 Hz China	100–120 V, 50/60 Hz USA/Japan
1	Right			6731 000 011*	6731 000 012*	6731 000 013*	6731 000 014*	6731 010 015*
1	Right		Humidity monitor	6731 000 111*	6731 000 112*	6731 000 113*	6731 000 114*	6731 010 115*
1	Right		Water level sensor	6731 000 211*	6731 000 212*	6731 000 213*	6731 000 214*	6731 010 215*
1	Right		Both	6731 000 311*	6731 000 312*	6731 000 313*	6731 000 314*	6731 010 315*
1	Right	1–20%		6731 001 011*	6731 001 012*	6731 001 013*	6731 001 014*	6731 011 015*
1	Left			6731 000 021*	6731 000 022*	6731 000 023*	6731 000 024*	6731 010 025*
1	Left		Humidity monitor	6731 000 121	6731 000 122	6731 000 123	6731 000 124	6731 010 125
1	Left		Water level sensor	6731 000 221	6731 000 222	6731 000 223	6731 000 224	6731 010 225
1	Left		Both	6731 000 321	6731 000 322	6731 000 323	6731 000 324	6731 010 325
1	Left	1–20%		6731 001 021*	6731 001 022*	6731 001 023*	6731 001 024*	6731 011 025*
4	Right			6731 000 041*	6731 000 042*	6731 000 043*	6731 000 044*	6731 010 045*
4	Right		Both	6731 000 341	6731 000 342	6731 000 343	6731 000 344	6731 010 345
4	Right	1–20%		6731 001 041*	6731 001 042*	6731 001 043*	6731 001 044*	6731 011 045*
4	Right	1–20%	Both	6731 001 341	6731 001 342	6731 001 343	6731 001 344	6731 011 345
4	Left			6731 000 051	6731 000 052	6731 000 053	6731 000 054	6731 010 055
4	Left		Both	6731 000 351	6731 000 352	6731 000 353	6731 000 354	6731 010 355
4	Left	1–20%	Both	6731 001 351	6731 001 352	6731 001 353	6731 001 354	6731 011 355
4	Left	1–20%		6731 001 051	6731 001 052	6731 001 053	6731 001 054	6731 011 055
8	Right	1–20%		6731 001 081*	6731 001 082*	6731 001 083*	6731 001 084*	6731 011 085*
8	Left	1–20%		6731 001 091	6731 001 092	6731 001 093	6731 001 094	6731 011 095

* Stock article; all others are built-to-order

CellXpert® C170 Ordering Information

Device Options	Order no				
Door Handle	230 V, 50/60 Hz European	230 V, 50/60 Hz UK/HKG	230 V, 50/60 Hz Australia	230 V, 50/60 Hz China	100–120 V, l50/60 Hz USA/Japan
CellXpert® C170, non-segmented inner door, handle right side	6734 000 011	6734 000 012	6734 000 013	6734 000 014	6734 010 015
CellXpert® C170, inner door with 4 door segments, handle right side	6734 000 041	6734 000 042	6734 000 043	6734 000 044	6734 010 045

Power supply	Europe	UK	Australia	China	ROW
New Brunswick S41i	S41I230011	S41I230012	S41I230013	S41I230014	S41I120010

Power supply	Europe	UK	Denmark	USA/Japan	Australia	China
CellXpert® CS220, 224 L, CO_2 incubator shaker, non-refrigerated, stackable up to 3-fold, orbit 2.5 cm (1 in), Please order separately: platform, clamps, sticky pads, storage base or feet, water supply package; Optional: 1-2 stacking kits and water tank holder	6740211010	6740211020	6740211060	6740111030	6740211040	6740211050
CellXpert® CS220, 224 L, CO_2 incubator shaker, non-refrigerated, stackable up to 3-fold, orbit 5.1 cm (2 in), Please order separately: platform, clamps, sticky pads, storage base or feet, water supply package; Optional: 1-2 stacking kits and water tank holder	6740212010	6740212020	6740212060	6740112030	6740212040	6740212050

Lab Shakers

Power supply	230 V, 50 Hz	120 V, 60 Hz	100 V, 60 Hz	100 V, 50 Hz
New Brunswick Innova® 40, 1.9 cm (3/4 in)	M1299-0082	M1299-0080	M1299-0081	M1299-0083
New Brunswick Innova® 40, 2.5 cm (1 in)	M1299-0092	M1299-0090	M1299-0091	M1299-0093
New Brunswick Innova® 40R, 1.9 cm (3/4 in)	M1299-0086	M1299-0084	M1299-0085	M1299-0087
New Brunswick Innova® 40R, 2.5 cm (1 in)	M1299-0096	M1299-0094	M1299-0095	M1299-0097
New Brunswick Innova® 42, 1.9 cm (3/4 in)	M1335-0002	M1335-0000	M1335-0001	M1335-0003
New Brunswick Innova® 42, 2.5 cm (1 in)	M1335-0012	M1335-0010	M1335-0011	M1335-0013
New Brunswick Innova® 42R, 1.9 cm (3/4 in)	M1335-0006	M1335-0004	M1335-0005	M1335-0007
New Brunswick Innova® 42R, 2.5 cm (1 in)	M1335-0016	M1335-0014	M1335-0015	M1335-0017
New Brunswick Innova® 44, 2.5 cm (1 in)	M1282-0002	M1282-0000	M1282-0001	M1282-0003
New Brunswick Innova® 44, 5.1 cm (2 in)	M1282-0012	M1282-0010	M1282-0011	M1282-0013
New Brunswick Innova® 44R, 2.5 cm (1 in)	M1282-0006	M1282-0004	M1282-0005	M1282-0007
New Brunswick Innova® 44R, 5.1 cm (2 in)	M1282-0016	M1282-0014	M1282-0015	M1282-0017

Power supply	Europe	UK/HKG	Australia	China	Japan	Argentina	Brazil	ROW
Innova® S44i, 2.5 cm (1 in) orbit, orbit 2.5 cm (1 in), incubated	S44I300001	S44I300002	S44I300003	S44I300004	S44I000006	S44I300008	S44I300009	S44I200005
Innova® S44i, 2.5 cm (1 in) orbit, orbit 2.5 cm (1 in), refrigerated	S44I310001	S44I310002	S44I310003	S44I310004	S44I010006	S44I310008	S44I310009	S44I210005
Innova® S44i, 2.5 cm (1 in) orbit, orbit 2.5 cm (1 in), refrigerated, photosynthetic LED light bank	S44I311001	S44I311002	S44I311003	S44I311004		S44I311008	S44I311009	S44I211005
Innova® S44i, 5.1 cm (2 in) orbit, orbit 5.1 cm (2 in), incubated	S44I320001	S44I320002	S44I320003	S44I320004	S44I020006	S44I320008	S44I320009	S44I220005
Innova® S44i, 5.1 cm (2 in) orbit, orbit 5.1 cm (2 in), refrigerated	S44I330001	S44I330002	S44I330003	S44I330004	S44I030006	S44I330008	S44I330009	S44I230005
Innova® S44i, 5.1 cm (2 in) orbit, orbit 5.1 cm (2 in), refrigerated, photosynthetic LED light bank	S44I331001	S44I331002	S44I331003	S44I331004		S44I331008	S44I331009	S44I231005

Centrifuges and Rotors - EU-IVD Products

Power supply	Europe	UK	China[1)]
Centrifuge MiniSpin® plus, non-refrigerated, with Rotor F-45-12-11	5453 000 011	5452 000 069	5452 000 093
Centrifuge MiniSpin®, non-refrigerated, with Rotor F-45-12-11	5452 000 018	5453 000 062	5453 000 097
Centrifuge 5418 R, refrigerated, with Rotor FA-45-18-11 and rotor lid	5401 000 013	5401 000 064	5401 000 099
Centrifuge 5420, keypad, non-refrigerated, without rotor	5420 000 210	5420 000 261	5420 000 296
Centrifuge 5420, keypad, non-refrigerated, with aerosol-tight Rotor FA-24x2	5420 000 016	5420 000 067	5420 000 091
Centrifuge 5425, keypad, refrigerated, without rotor	5405 000 212	5405 000 263	5405 000 298
Centrifuge 5425, rotary knobs, refrigerated, without rotor	5405 000 611	5405 000 662	5405 000 697
Centrifuge 5425, keypad, refrigerated, with Rotor FA-24x2	5405 000 018	5405 000 069	5405 000 093
Centrifuge 5425, rotary knobs, refrigerated, with Rotor FA-24x2	5405 000 417	5405 000 468	5405 000 492
Centrifuge 5425, rotary knobs, non-refrigerated, Molecular Biology Solution, with Rotor FA-18x2-Kit	5405 000 158		
Centrifuge 5425 R, keypad, non-refrigerated, without rotor	5406 000 216	5406 000 267	5406 000 291
Centrifuge 5425 R, rotary knobs, non-refrigerated, without rotor	5406 000 615	5406 000 666	5406 000 690
Centrifuge 5425 R, keypad, non-refrigerated, with Rotor FA-24x2	5406 000 011	5406 000 062	5406 000 097
Centrifuge 5425 R, rotary knobs, non-refrigerated, with Rotor FA-24x2	5406 000 410	5406 000 461	5406 000 496
Centrifuge 5427R, rotary knobs, refrigerated, without rotor	5429 000 015	5429 000 065	5429 000 097
Centrifuge 5427R, rotary knobs, refrigerated, with Rotor FA-45-30-11	5429 000 315	5429 000 365	5429 000 397
Centrifuge 5427R, rotary knobs, refrigerated, with Rotor FA-45-48-11	5429 000 215	5429 000 265	5429 000 297
Centrifuge 5430 R, keypad, refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5428 000 015	5428 000 066	5428 000 090
Centrifuge 5430 R, rotary knobs, refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5428 000 414	5428 000 465	5428 000 490
Centrifuge 5430 R, keypad, refrigerated, without rotor	5428 000 210	5428 000 260	5428 000 295
Centrifuge 5430 R, rotary knobs, refrigerated, without rotor	5428 000 619	5428 000 660	5428 000 694
Centrifuge 5430, keypad, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5427 000 216	5427 000 267	5427 000 291
Centrifuge 5430, rotary knobs, non-refrigerated, with Rotor FA-45-30-11 incl. rotor lid	5427 000 410	5427 000 461	5427 000 496
Centrifuge 5430, keypad, without rotor	5427 000 011	5427 000 062	5427 000 097
Centrifuge 5430, rotary knobs, non-refrigerated, without rotor	5427 000 615	5427 000 666	5427 000 690
Centrifuge 5702, rotary knobs, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters	5702 000 329	5702 000 361	5702 000 396
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 15/50 mL conical tubes, 2 sets of 2 adapters	5703 000 420	5703 000 462	5703 000 497
Centrifuge 5702 R, rotary knobs, refrigerated, with Rotor A-4-38 incl. adapters for 13/16 mm blood collection tubes, 2 sets of 2 adapters	5703 000 322	5703 000 365	5703 000 390
Centrifuge 5702 R, rotary knobs, refrigerated, without rotor	5703 000 012	5703 000 063	5703 000 098
Centrifuge 5702 RH, rotary knobs, refrigerated/heated, without rotor	5704 000 016	5704 000 067	5704 000 091
Centrifuge 5702, rotary knobs, without rotor	5702 000 019	5702 000 060	5702 000 094
Centrifuge 5702, rotary knobs, non-refrigerated, with Rotor A-4-38 incl. adapters for round-bottom tubes 4 – 10 mL and adapters for round-bottom tubes 2.6 – 7 mL, 2 sets of 2 adapters	5702 000 510	5702 000 558	5702 000 574
Centrifuge 5804, keypad, non-refrigerated, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes	5804 000 323	5804 000 366	5804 000 390
Centrifuge 5804, keypad, non-refrigerated, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes	5804 000 528	5804 000 560	5804 000 595
Centrifuge 5804 R, keypad, refrigerated, with Rotor A-4-44 incl. adapters for 15/50 mL conical tubes	5805 000 327	5805 000 360	5805 000 394
Centrifuge 5804 R, keypad, refrigerated, with Rotor S-4-72 incl. adapters for 15/50 mL conical tubes	5805 000 629	5805 000 661	5805 000 696
Centrifuge 5804 R, keypad, refrigerated, without rotor	5805 000 017	5805 000 068	5805 000 092
Centrifuge 5804, keypad, non-refrigerated, without rotor	5804 000 013	5804 000 064	5804 000 099
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes	5810 000 327	5810 000 360	5810 000 394
Centrifuge 5810, keypad, non-refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes	5810 000 424	5810 000 467	5810 000 491
Centrifuge 5810, keypad, non-refrigerated, with Rotor S-4-104 incl. adapters for 15/50 mL conical tubes	5810 000 521	5810 000 564	5810 000 599
Centrifuge 5810, keypad, non-refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes	5810 000 629	5810 000 661	5810 000 696
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-62 incl. adapters for 15/50 mL conical tubes	5811 000 320	5811 000 363	5811 000 398
Centrifuge 5810 R, keypad, refrigerated, with Rotor A-4-81 incl. adapters for 15/50 mL conical tubes	5811 000 428	5811 000 460	5811 000 495
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 15/50 mL conical tubes	5811 000 622	5811 000 665	5811 000 690
Centrifuge 5810 R, keypad, refrigerated, with Rotor S-4-104 incl. adapters for 13/16 mm round-bottom tubes	5811 000 827	5811 000 860	5811 000 894
Centrifuge 5810 R, keypad, refrigerated, without rotor	5811 000 010	5811 000 061	5811 000 096
Centrifuge 5810, keypad, non-refrigerated, without rotor	5810 000 017	5810 000 068	5810 000 092
Centrifuge 5910 Ri, refrigerated, without rotor	5943 000 017	5943 000 068	5943 000 092
Centrifuge 5910 Ri, refrigerated, with Rotor S-4x750, incl. round buckets and adapters for 5 mL/15 mL/50 mL conical tubes	5943 000 511	5943 000 564	5943 000 599
Centrifuge 5910 Ri, refrigerated, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes and plates	5943 000 319	5943 000 368	5943 000 394
Centrifuge 5910 Ri, refrigerated, with Rotor S-4xUniversal, incl. universal buckets and adapters for 5 mL/15 mL/50 mL conical tubes, 175 – 250 mL bottles and plates	5943 000 211	5943 000 262	5934 000 297
Centrifuge 5920 R, keypad, refrigerated, without rotor	5948 000 018	5948 000 069	5948 000 093
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. high-capacity buckets and adapters for 15 mL/50 mL conical tubes	5948 000 212	5948 000 263	5948 000 298
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. round buckets and adapters for 15 mL/50 mL conical tubes	5948 000 310	5948 000 360	5948 000 395
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4x1000, incl. plate/tube buckets and adapters for 15 mL/50 mL conical tubes	5948 000 417	5948 000 468	5948 000 492
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for round-bottom tubes with diameter 13/16 mm	5948 000 816	5948 000 867	5948 000 891
Centrifuge 5920 R, keypad, refrigerated, with Rotor S-4xUniversal-Large, incl. universal buckets and adapters for 5 mL/15 mL/25 mL/50 mL conical tubes and plates	5948 000 914	5948 000 965	5948 000 998

[1)] Listed articles (except for Centrifuge 5920 R) registered as medical devices class 1 in China.

Application and Technical support

Your local distributor:
www.eppendorf.link/contact

Eppendorf Online Shop:
www.eppendorf.link/eshop

More information for you:

Our distributors

Your local contact:



www.eppendorf.link/distributors/

Legal notices, trademarks, patent and design attributions

Trademarks of third parties may appear on this catalogue when referring to their products or services. All trademarks are the property of their respective owners. The trademark name representations and listed owners can be found here:



www.eppendorf.link/trademarks

Imprint:

Eppendorf SE
Barkhausenweg 1
22339 Hamburg
Germany
Phone: + 49 40 53 801-0
Fax: + 49 40 53 801-556

E-mail: eppendorf@eppendorf.de
or contact form
Web: www.eppendorf.com
Registration court:
Local Court Hamburg
Registration number: HRB 171526

Management Board:
Dr. Christine Munz, Chief Executive Officer
Hans-Christian Stuff, Chief Financial Officer

Chairman of the Supervisory Board:
Philipp von Loeper

Turnover tax identification number
pursuant to § 27 a Turnover Tax Law:
DE 118649726

Eppendorf® and the Eppendorf Brand Design are registered trademarks of Eppendorf SE, Germany. U.S. Design Patents are listed on www.eppendorf.com/ip.
All rights reserved, including graphics and images. Order No.: AK01 014 120/EN1/052026/CCO_MEP/Copyright© 2026 by Eppendorf SE.